



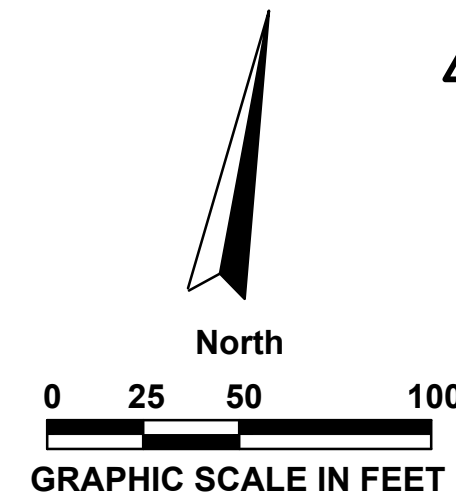

1. SEE SHEET E001 FOR GENERAL NOTES AND E002 FOR SYMBOL LEGEND.
2. SEE CONTRACT DETAILS AND CONTRACT SPECIFICATIONS FOR ADDITIONAL INFORMATION REGARDING INSTALLATION OF LIGHT FIXTURES, SIGNS, ASSOCIATED CONDUIT, CABLE AND APPURTENANCES.
3. AIRFIELD LIGHTING FIXTURES SHALL BE CONNECTED IN THE SERIES CIRCUIT IN THE SEQUENCE SHOWN IN THE CONTRACT DOCUMENTS. THE "RETURN" CONDUCTOR SHALL NOT BE CONNECTED TO ANY AIRFIELD LIGHTING FIXTURES. SEE SPECIFICATION L-111 FOR FURTHER DETAILS.
4. EACH FIXTURE SHALL BE INDIVIDUALLY BONDED TO THE BASE CAN WITH A #6 AWG STRANDED COPPER, GREEN THWN-2 INSULATED BONDING JUMPER. THE WIRE SHALL CONFORM TO ASTM B3, ASTM B8 AND ASTM B33.
5. EACH FIELD LIGHTNING ARRESTOR ASSEMBLY SHALL BE INDIVIDUALLY BONDED TO THE BASE CAN WITH A #2 AWG STRANDED COPPER, GREEN THWN-2 INSULATED BONDING JUMPER. THE WIRE SHALL CONFORM TO ASTM B3, ASTM B8 AND ASTM B33.
6. EACH SIGN SHALL BE BONDED TO THE SIGN GROUND ROD WITH A #2 AWG STRANDED COPPER GREEN THWN-2 INSULATED BONDING JUMPER. THE WIRE SHALL CONFORM TO ASTM B3, ASTM B8 AND ASTM B33. THE SIGN BONDING JUMPER SHALL BE SIX INCHES LONGER THAN THE SIGN TETHERS TO ALLOW THE TETHERS TO PROPERLY OPERATE.
7. THE CONTRACTOR SHALL MANDREL EACH INDIVIDUAL NEW CONDUIT AND EACH EXISTING CONDUIT TO BE UTILIZED IN THE PROJECT.
8. THE CONTRACTOR SHALL SWAB OUT ALL CONDUITS/DUCTS AND CLEAN ALL BASE CAN, MANHOLE, PULL BOXES, ETC. INTERIORS IMMEDIATELY PRIOR TO PULLING CABLE. ONCE CLEANED AND SWABBED THE BASE CANS, MANHOLE, PULL BOXES, ETC. AND ALL ACCESSIBLE POINTS OF ENTRY TO THE DUCT/CONDUIT SYSTEM SHALL BE KEPT CLOSED EXCEPT WHEN INSTALLING CABLES. CLEANING OF DUCTS, BASE CANS, MANHOLES, ETC. IS INCIDENTAL TO THE CABLE INSTALLATION PAY ITEM. ALL RACEWAY SYSTEMS LEFT OPEN, AFTER INITIAL CLEANING, FOR ANY REASON SHALL BE RECLEANED AT THE CONTRACTOR'S EXPENSE. ALL ACCESSIBLE POINTS SHALL BE KEPT CLOSED WHEN NOT INSTALLING CABLE. THE CONTRACTOR SHALL VERIFY EXISTING DUCTS PROPOSED FOR USE IN THIS PROJECT AS CLEAR AND OPEN. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY BLOCKAGE IN THE EXISTING DUCTS.
9. SPECIFICATION SECTION L-111 REQUIRES SPECIFIC TESTING TO BE PERFORMED, RECORDED AND SUBMITTED AS PART OF THE CLOSE OUT DOCUMENTS. SEE SPECIFICATION L-106 AND L-111 FOR DETAILS OF TESTING AND SUBMITTAL REQUIREMENTS.

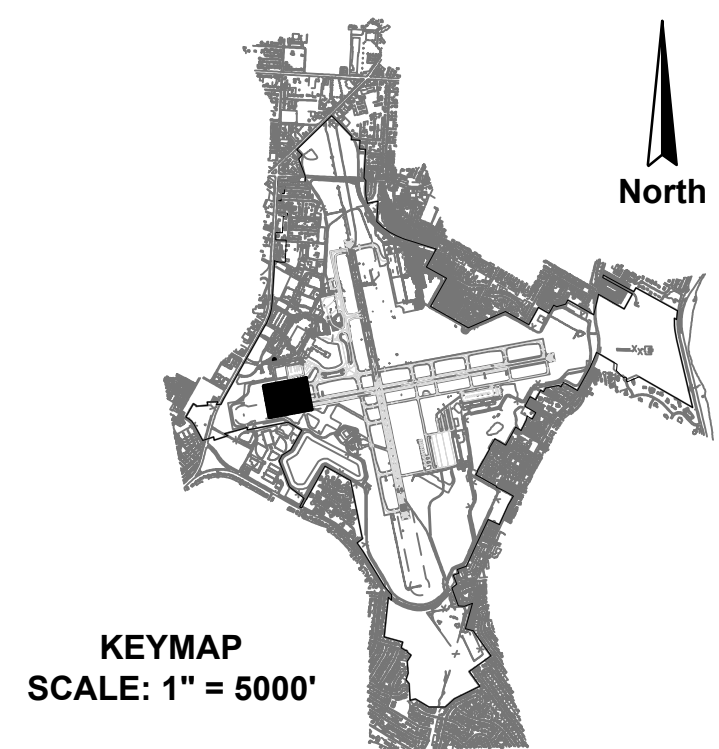

AVCON, INC.
ENGINEERS & PLANNERS

3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 698-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
www.avconinc.com

**TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY**

1	4/25	ADDITION 3	SAT
△			
△			
△			
△			
△			
△			
△			
△			
NO.	DATE	REVISION	BY

**AIRFIELD
LIGHTING
CIRCUITING PLAN
(SHEET 1 OF 11)**

ISSUED FOR BID DRAWINGS

RUNWAY 8-26 REHABILITATION

PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
E301