


N:\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_E702.DWG 4/11/2025 11:47 AM

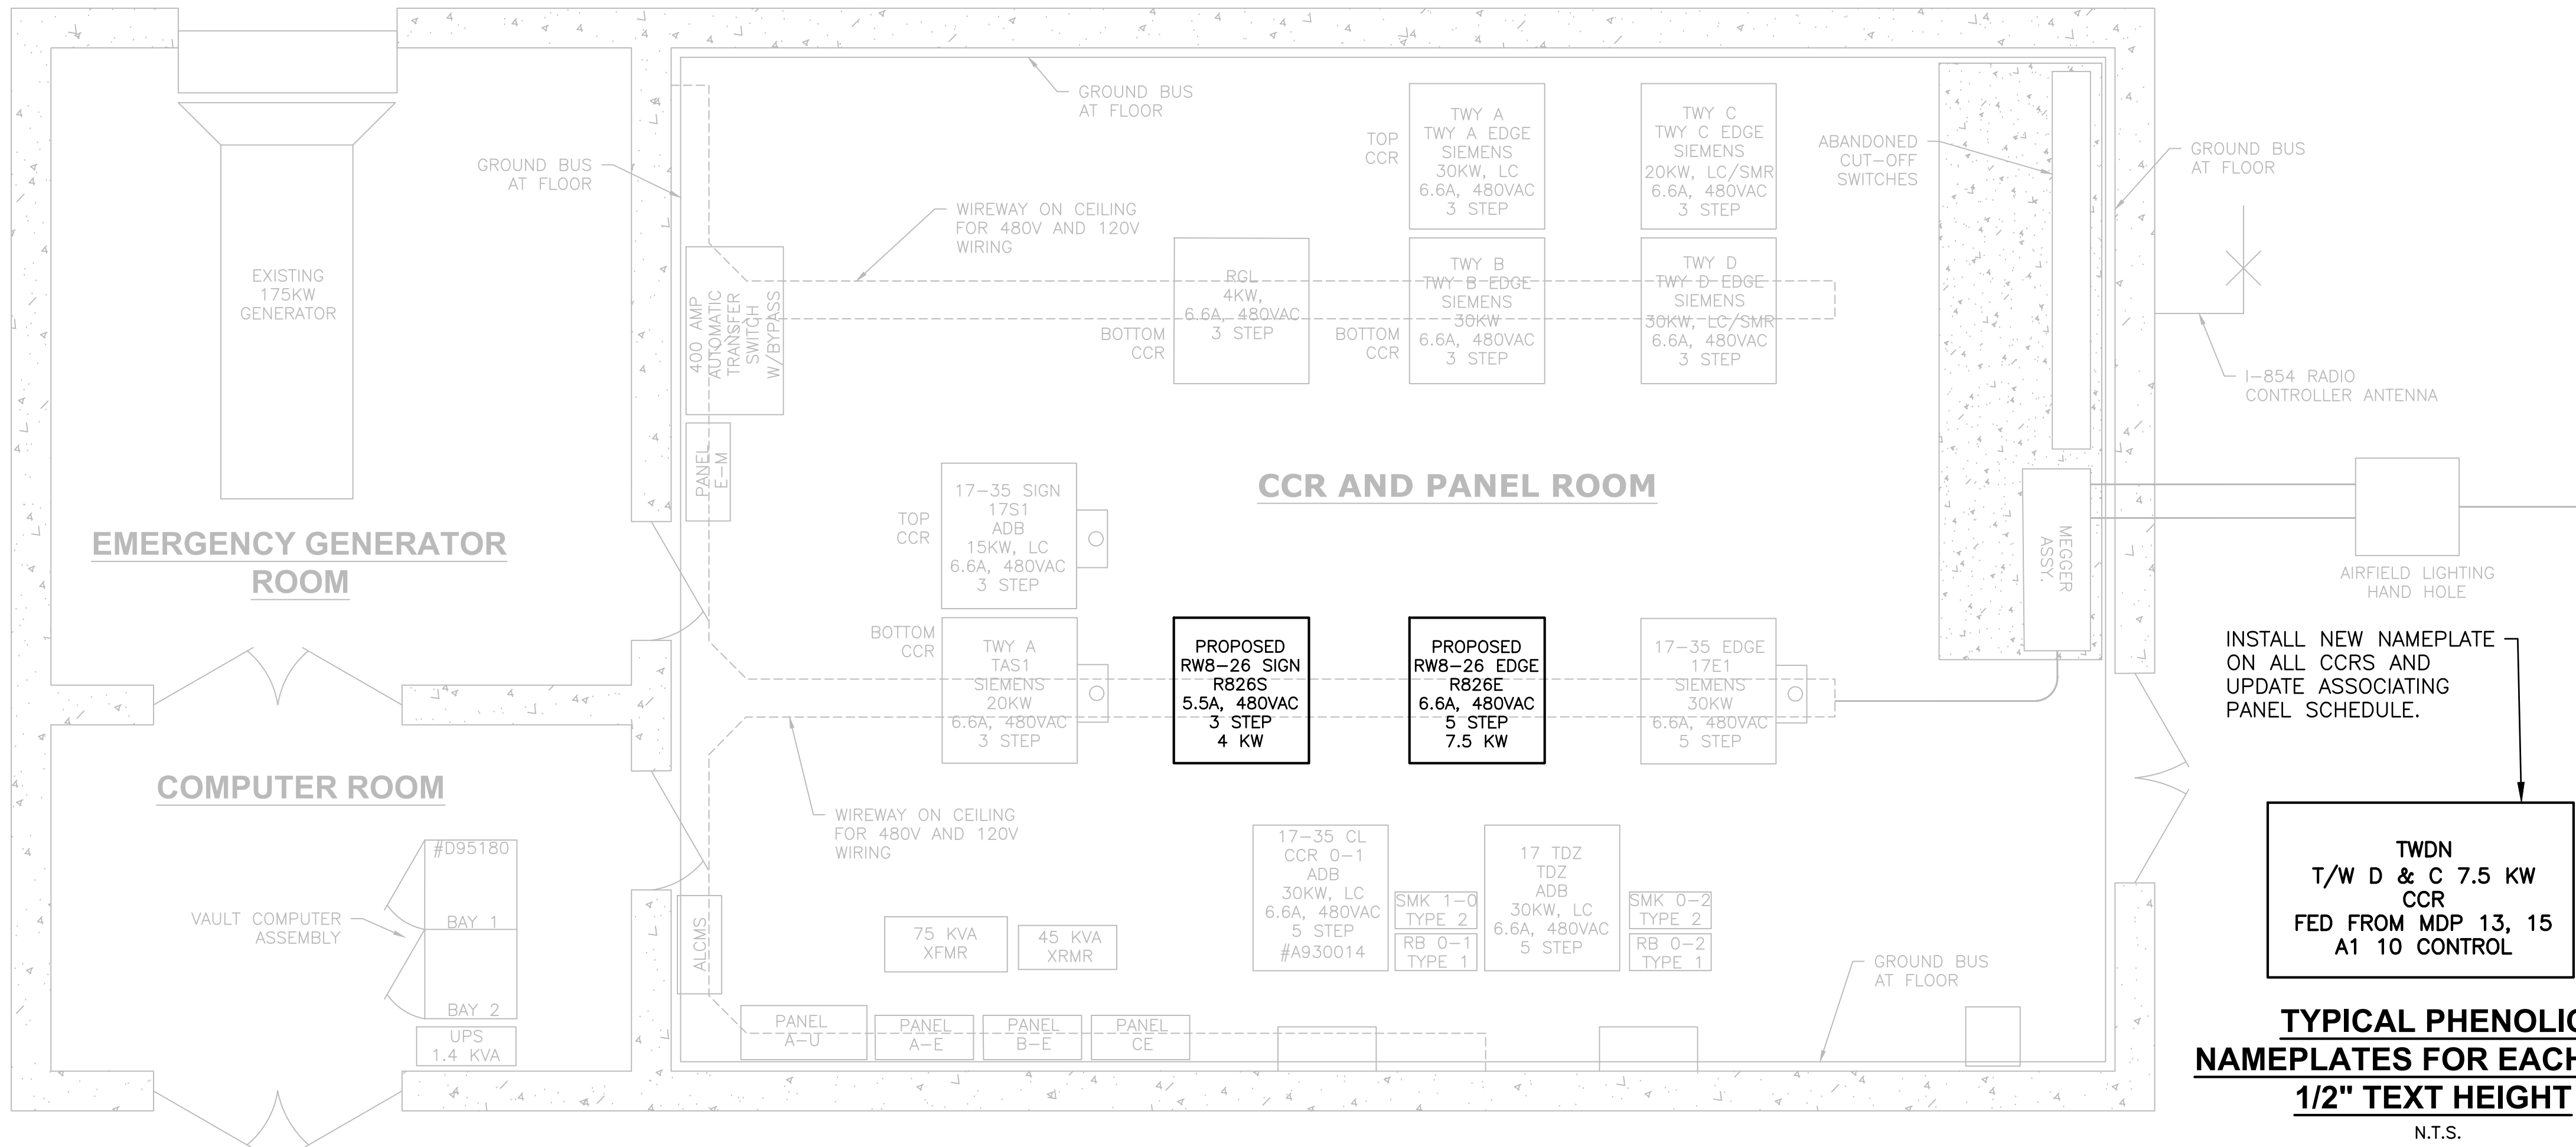

NOTES:

- THESE DOCUMENTS WERE DESIGNED IN ACCORDANCE WITH NFPA 70, NATIONAL ELECTRICAL CODE, 2020.
- ALL SERVICE AND DISTRIBUTION EQUIPMENT SHALL COMPLY WITH NFPA 70, NATIONAL ELECTRICAL CODE (NEC), AND SPECIFICALLY ARTICLES 110.9 AND 110.10 AND SHALL HAVE A MINIMUM UL LISTED INTEGRATED SHORT CIRCUIT RATING OF THE UPSTREAM DISTRIBUTION EQUIPMENT, OR VALUE AS NOTED IN THE CONTRACT DOCUMENTS, OR AS CALCULATED BY THE SHORT CIRCUIT/COORDINATION/ARC-FLASH HAZARD ANALYSIS, WHICHEVER VALUE IS GREATER.
- THIS CONTRACTOR SHALL FURNISH AND INSTALL ALL RECOMMENDED OVERCURRENT PROTECTION AND SHORT CIRCUIT PROTECTION REQUIRED BY THE NEC, EQUIPMENT MANUFACTURERS AND THESE DOCUMENTS AND SPECIFICATION. THE OVERCURRENT PROTECTION SHALL BE SIZED IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS AND THE NEC.
- UNLESS NOTED OTHERWISE, ALL WIRE SIZES ARE BASED ON A 75 DEG. C., THWN-2, 600 VOLT INSULATION, COPPER CONDUCTORS, NOT MORE THAN THREE SINGLE INSULATED CONDUCTORS, IN RACEWAY, IN FREE AIR. THE CONDUIT/DUCT SIZES ARE BASED ON THE USE OF THWN-2, 600 VOLT INSULATED CONDUCTORS. THE CONTRACTOR SHALL MAKE THE NECESSARY INCREASE IN CONDUIT/DUCT SIZES FOR OTHER TYPES OF WIRE INSULATION. IN NO CASE SHALL THE CONDUIT/DUCT SIZE BE REDUCED. THE MINIMUM POWER CIRCUIT WIRE SIZE SHALL BE 12 AWG COPPER. ALL ELECTRICAL CONDUCTORS SHALL BE COPPER.
- SPD WIRING SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTRUCTIONS. FOR TAP CONNECTIONS, INSTALLATIONS SHALL COMPLY WITH THE NEC ART. 240-21. SPD SHALL BE MANUFACTURED BY SURGE SUPPRESSION INCORPORATED OF DESTIN FLORIDA OR ACCEPTED EQUIVALENT. PRODUCT SHALL HAVE A 25 YEAR WARRANTY; VERIFY AND CONFIRM VOLTAGE/PHASE PRIOR TO SUBMITTAL.
- THE CONTRACTOR SHALL FURNISH AND INSTALL MAIN AND BRANCH CIRCUIT BREAKERS, PANELBOARDS AND EQUIPMENT CAPABLE OF ACCEPTING THE WIRE SIZES SHOWN ON THE CONTRACT DOCUMENTS. CONDUCTOR SIZES MAY HAVE BEEN ADJUSTED DUE TO VOLTAGE DROP OR OTHER ENGINEERING CONSIDERATIONS. THE CONTRACTOR SHALL PROVIDE EQUIPMENT CAPABLE OF ACCEPTING THE QUANTITY AND SIZES OF CONDUCTORS SHOWN IN THE CONTRACT DOCUMENTS. CONTRACTOR SHALL PROVIDE LUGS FOR EXISTING EQUIPMENT CAPABLE OF ACCEPTING THE QUANTITY AND SIZES OF CONDUCTORS SHOWN IN THE CONTRACT DOCUMENTS. ALL CONDUCTOR PIGTAILS, CABLE STEP-DOWN ADAPTERS, CABLE STEP-UP ADAPTERS, TERMINAL BLOCKS, SPLICING MATERIALS NECESSARY TO COMPLETE THE CABLE TERMINATION SHALL BE CONSIDERED INCIDENTAL TO THE PAY ITEMS PROVIDED.
- ALL BELOW GROUND CONDUITS SHALL BE SEALED TO PREVENT AIR CIRCULATION WITHIN THE ENCLOSURE/CABINET WITH THE OUTSIDE ATMOSPHERE.
- ALL GROUND RODS SHALL HAVE AN EARTH TO GROUND RESISTANCE OF 10 OHMS OR LESS. ALL CONNECTIONS OF CONDUCTORS TO GROUND RODS SHALL BE MADE BY EXOTHERMIC METHOD OR ACCEPTED EQUIVALENT.
- BOND ALL METALLIC RACEWAYS AND ENCLOSURES WITH A 2 AWG COPPER (MINIMUM SIZE) EQUIPMENT GROUNDING CONDUCTOR SIZED IN ACCORDANCE WITH THE NEC.


SHORT CIRCUIT / COORDINATION / DEVICE EVALUATION / ARC FLASH ANALYSIS NOTES:

CONTRACTOR SHALL, BASED UPON THE EQUIPMENT PROVIDED, INCLUDE AS PART OF THE SUBMITTAL PROCESS THE SYSTEM SHORT CIRCUIT CURRENT, COORDINATION STUDY AND ARC FLASH STUDY. THE STUDIES SHALL BE PERFORMED BY THE EQUIPMENT MANUFACTURER/SUPPLIER. A SHORT CIRCUIT, COORDINATION, DEVICE EVALUATION AND ARC FLASH ANALYSIS SHALL CONSIST OF THE TASKS LISTED BELOW:

- THIS ANALYSIS WILL INCLUDE: ONE LINE DIAGRAMS, SHORT CIRCUIT ANALYSIS, COORDINATION ANALYSIS AND ARC FLASH ANALYSIS AND LABELS.
- THE SELECTED FIRM'S FIELD SERVICE ENGINEER WILL PERFORM DATA GATHERING FOR ANALYSIS COMPLETION AND DEVICE SETTINGS, PERFORM DEVICE SETTING AS RECOMMENDED BY THE ANALYSIS AND WILL PROVIDE ARC FLASH LABELS WITH THE ARC FLASH ANALYSIS. THE COMPONENTS WORST CASE VALUE WILL BE CONSIDERED THE AVAILABLE ARC FLASH ENERGY AT THAT POINT IN THE SYSTEM. THE ARC FLASH LABELS WILL BE SIMILAR TO THE EXAMPLE BELOW. THE CONTRACTOR SHALL INSTALL THE NEW ARC FLASH LABELS.
- FIVE COPIES OF THE WRITTEN ANALYSIS AND DRAWINGS SHALL BE PROVIDED DURING THE EQUIPMENT SUBMITTAL PHASE. THREE COPIES SHALL BE ASSIGNED TO THE OWNER, TWO COPIES ASSIGNED TO THE ELECTRIC ENGINEER.

! WARNING	
Arc Flash and Shock Hazard	
Nominal System Voltage _____	Incident Energy (cal/cm ²) _____
Arc Flash Boundary _____	Working Distance _____
Limited Approach _____	OR
Restricted Approach _____	PPE Hazard Category _____
	Arc Rating of Clothing _____
Arc-rated PPE:	☐ Face shield ☐ Coverall
☐ Long-sleeve shirt ☐ Balaclava ☐ Hard hat liner	☐ Hard hat
☐ Flash suit jacket ☐ Gloves ☐	☐ Safety goggles ☐
☐ Flash suit pants ☐ Jacket ☐	☐ Safety glasses ☐
☐ Flash suit hood ☐ Parka ☐	☐ Hearing protection ☐
☐ Pants ☐ Rainwear ☐	☐ Heavy duty leather gloves ☐
☐ Leather footwear	
Equipment ID: _____	
BRADY® #145972 BRADYID.COM Y4118036	

ARC FLASH HAZARD LABEL

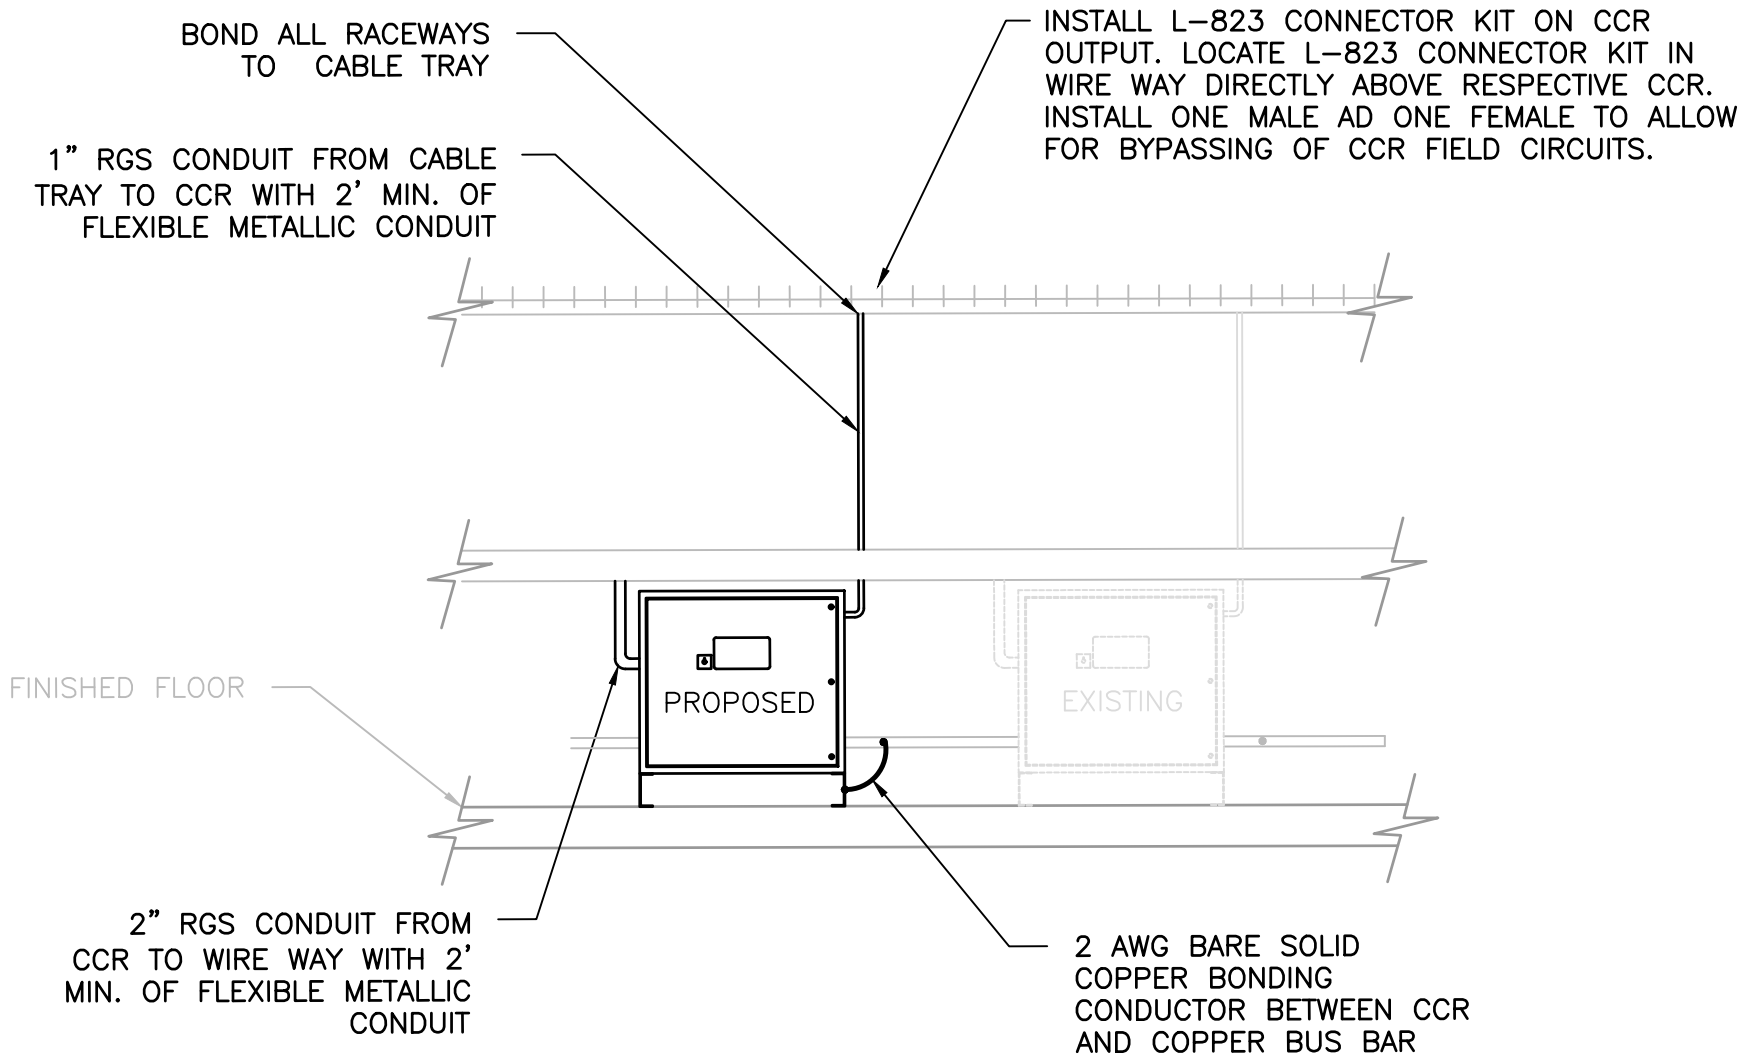

1

PROPOSED AIRFIELD LIGHTING VAULT LAYOUT

AVCON, INC.
ENGINEERS & PLANNERS

3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

SAH

4/25

ADDENDUM 3

**PROPOSED
AIRFIELD
LIGHTING VAULT**

ISSUED FOR BID DRAWINGS

**RUNWAY 8-26
REHABILITATION**

PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

E702