


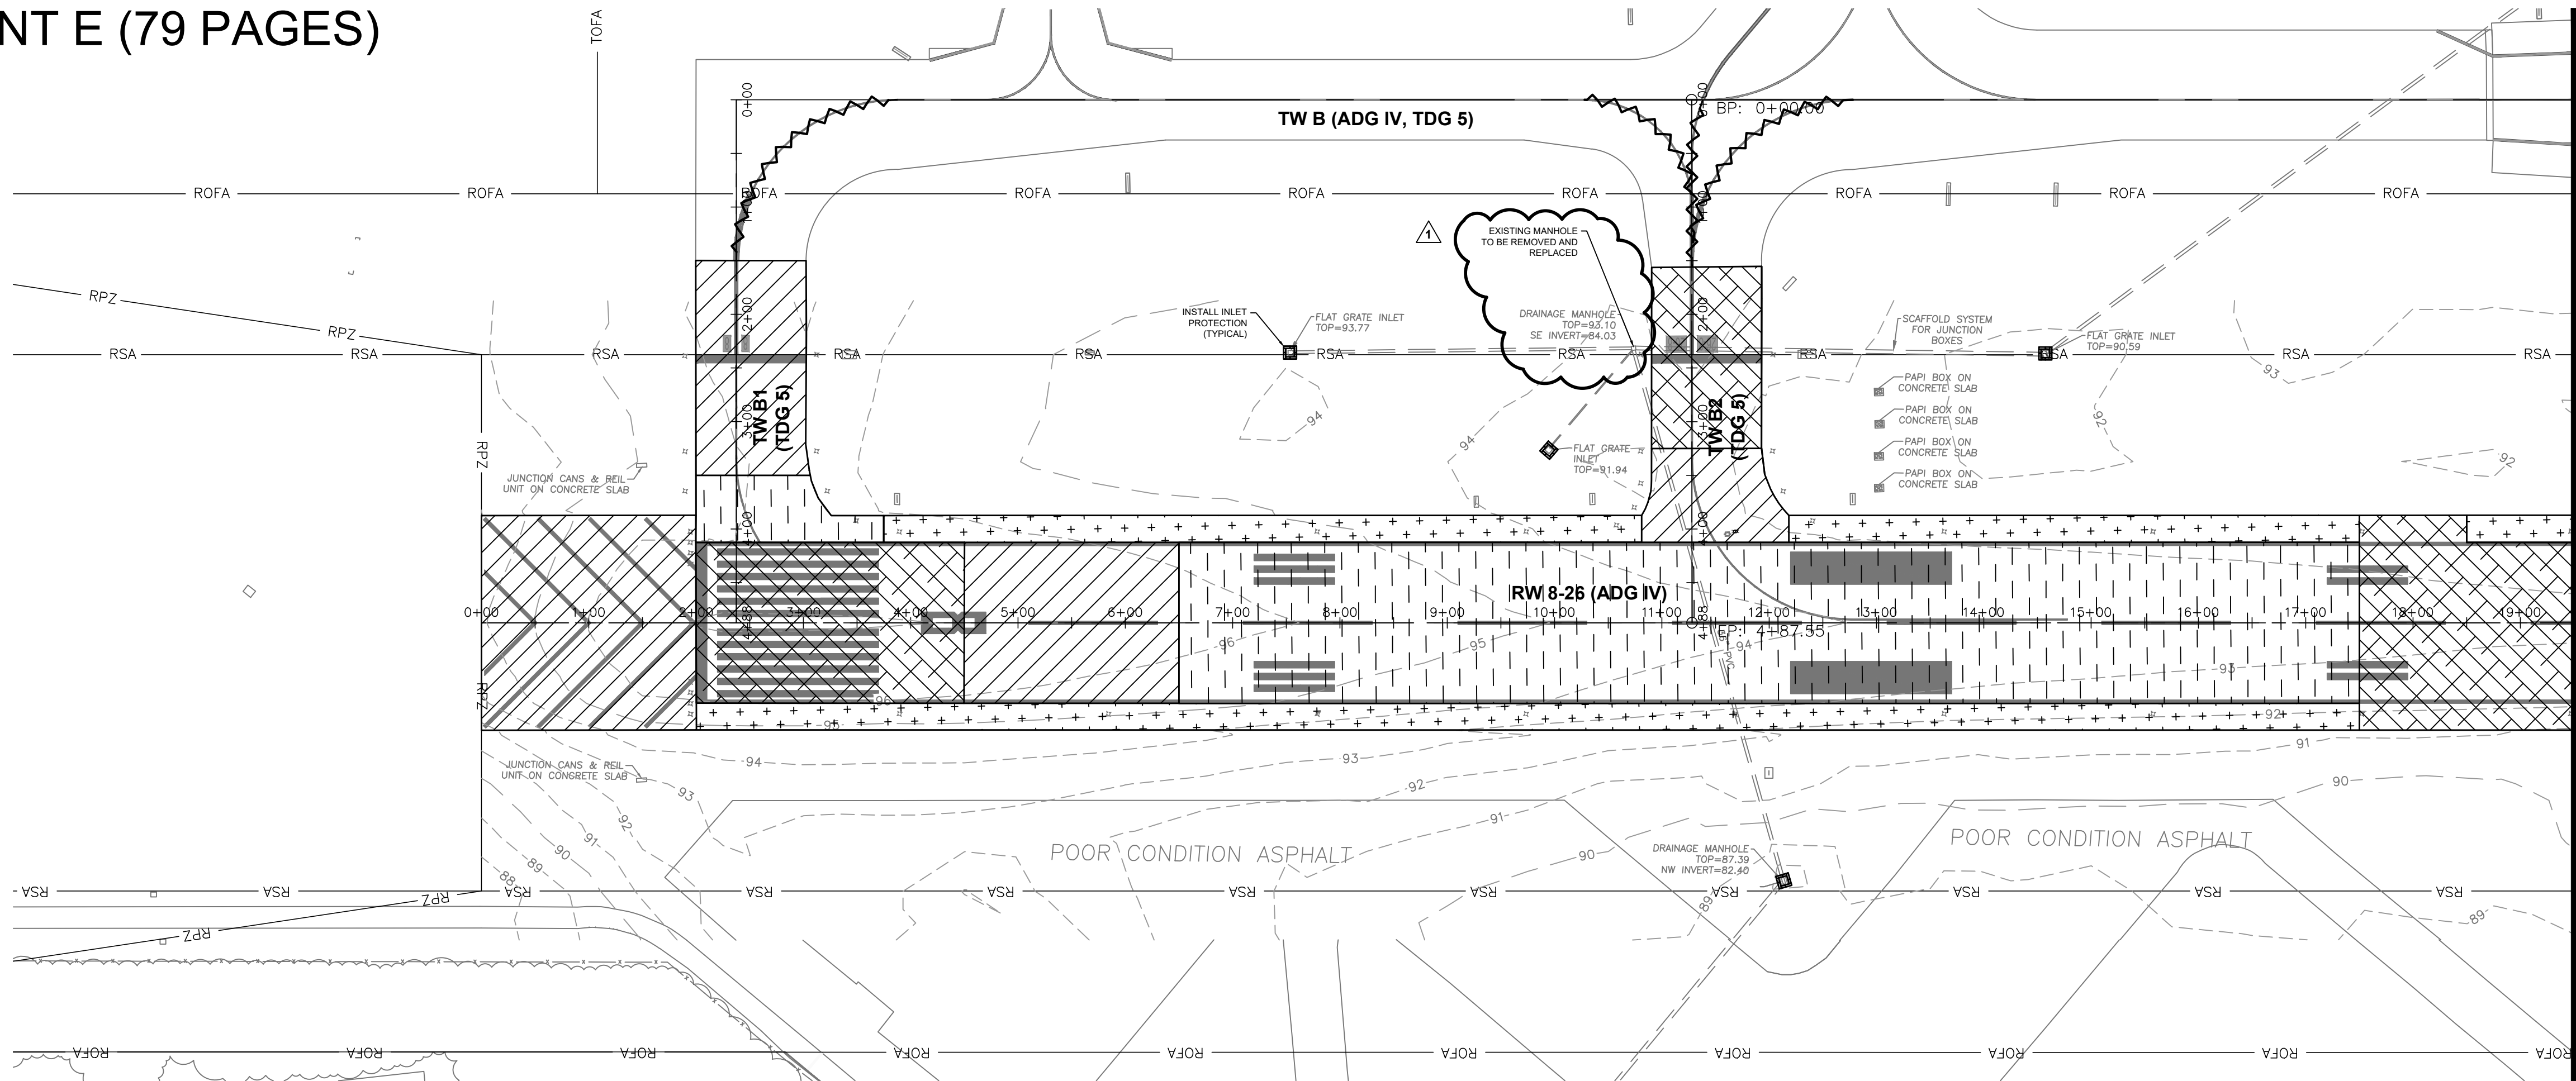

MATCHLINE - SEE SHEET C-2

SURVEYOR'S REPORT:

- UTILITY LOCATIONS SHOWN HEREON ARE BASED ON FIELD LOCATIONS OF MARKINGS BY SOUTHEASTERN SURVEYING & MAPPING CORP. FIELD MARKINGS ARE BASED ON SIGNALS RECEIVED FROM GROUND PENETRATING RADAR (GPR) AND ELECTRONIC EQUIPMENT. LOCATIONS ARE APPROXIMATE AND TEST HOLES SHOULD BE PERFORMED FOR VERIFICATION.
- EASEMENTS OR RIGHTS OF WAY THAT APPEAR ON RECORDED PLANS OR THAT HAVE BEEN FURNISHED TO THE SURVEYOR BY OTHERS HAVE BEEN INCORPORATED INTO THIS DRAWING WITH APPROPRIATE NOTATION. OTHER EASEMENTS MAY BE DISCOVERED BY A SEARCH OF THE PUBLIC RECORDS.
- MINIMUM HORIZONTAL ACCURACY FOR THIS SURVEY IS IN ACCORDANCE WITH THE STANDARDS OF PRACTICE SET FORTH BY THE BOARD OF PROFESSIONAL SURVEYORS AND MAPPERS IN CHAPTER 5J-17 REQUIREMENTS OF FLORIDA ADMINISTRATION CODE. THE MAP AND MEASUREMENT METHODS USED FOR THIS SURVEY MEET OR EXCEED THIS REQUIREMENT. THE DIMENSIONS SHOWN HEREON ARE IN UNITED STATES STANDARD SURVEY FEET AND DECIMALS THEREOF.
- THIS SURVEY DOES NOT DETERMINE OWNERSHIP OF THE LANDS SHOWN HEREON.
- UNDERGROUND FOUNDATIONS HAVE NOT BEEN LOCATED.
- SURVEY MAP AND REPORT OR THE COPIES THEREOF ARE NOT VALID WITHOUT THE ORIGINAL SIGNATURE AND SEAL OR THE ELECTRONIC SIGNATURE AND SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER, AND IF SHOWN HEREON IS IN COMPLIANCE WITH FLORIDA ADMINISTRATIVE CODE 5J-17.062 AND FLORIDA STATUTE 472.025.
- FEATURES SHOWN BY SYMBOL AS INDICATED IN THE LEGEND ARE NOT TO SCALE.
- ADDITIONS OR DELETIONS TO SURVEY MAPS OR REPORTS BY OTHER THAN THE SIGNING PARTY OR PARTIES IS PROHIBITED WITHOUT WRITTEN CONSENT OF THE SIGNING PARTY OR PARTIES.
- VERTICAL INFORMATION SHOWN HEREON REFERS TO NATIONAL GEODETIC SURVEY (NGS) PID# BG1750, BEING A SURVEY DISK SET IN TOP OF CONCRETE MONUMENT STAMPED "R 25 1942", ELEVATION 92.72', NAVD88, THE CONTOUR INTERVAL IS ONE FOOT.
- HORIZONTAL POSITIONS FOR ALL FEATURES SHOWN ON THE MAP ARE RELATIVE TO NORTH AMERICAN DATUM OF 1983 (NAD83), 1999 ADJUSTMENT, STATE PLANE COORDINATE SYSTEM, FLORIDA NORTH ZONE. CONTROL POINT USED FOR THIS SURVEY IS PID # BG1750. DISTANCES SHOWN ARE GRID DISTANCES.
- THIS SURVEY WAS PERFORMED WITHOUT BENEFIT OF AN ABSTRACT, TITLE SEARCH, TITLE OPINION OR TITLE COMMITMENT. A TITLE SEARCH MAY REVEAL ADDITIONAL INFORMATION AFFECTING THE PARCEL AS SHOWN.
- IMPROVEMENTS & TOPOGRAPHIC FEATURES SHOWN HEREON ARE LIMITED TO AREAS PER SPECIFIC INSTRUCTIONS OF THE CLIENT.

SPECIAL UTILITY NOTE:

THE CONTRACTOR SHALL COORDINATE UTILITY LOCATES WITH AIRPORT 2 WEEKS PRIOR TO DIGGING. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR THE LOCATION OF ALL EXISTING UTILITIES WITHIN THE PROJECT LIMITS. PRIOR TO ANY EXCAVATION OR DEMOLITION, THE CONTRACTOR SHALL PROVIDE A WRITTEN NOTICE (RETURN RECEIPT REQUESTED) TO EACH OF THE UTILITY COMPANIES AFFECTED BY THE PROJECT, ALONG WITH THE VARIOUS DEPARTMENTS OF FLORIDA SUNSHINE ONE CALL AS PRESCRIBED BY STATE LAW. THE CONTRACTOR SHALL PROVIDE THE OWNER AND THE OWNER'S REP WITH A COPY OF THE RECEIPT OF SAID WRITTEN NOTIFICATION TO EACH OF THE UTILITY COMPANIES OR BAY COUNTY DEPARTMENTS. THIS REQUIREMENT IS IN ADDITION TO ANY OTHER STATE LAWS REGARDING PUBLIC NOTIFICATION PRIOR TO EXCAVATION.

DEMOLITION AND EROSION CONTROL NOTES:


- ALL SEDIMENT CONTROL MEASURES SHOWN OF THESE PLANS ARE TO BE ADJUSTED TO MEET FIELD CONDITIONS AT THE TIME OF CONSTRUCTION AND SHALL BE CONSTRUCTED PRIOR TO ANY GRADING OR DISTURBANCE OF EXISTING SURFACE MATERIAL ON THE BALANCE OF THE SITE.
- PERIODIC INSPECTION AND MAINTENANCE OF ALL SEDIMENT CONTROL DEVICES MUST BE PROVIDED TO ENSURE INTENDED PURPOSE IS ACCOMPLISHED AT NO ADDITIONAL COST TO THE OWNER.
- CONTRACTOR SHALL PROVIDE SOIL TRACKING DEVICES AT ALL CONSTRUCTION ENTRANCES AND EXITS OF THE SITE AND WHERE CONSTRUCTION EQUIPMENT ENTERS AND EXITS EACH WORK ZONE INSTALLED OUTSIDE RSA.
- ALL TEMPORARY EARTH BERMS AND DIVERSIONS ARE TO BE MACHINE COMPACTED AND SODDED FOR TEMPORARY VEGETATIVE COVER WITHIN 10 DAYS AFTER GRADING.
- AFTER ANY SIGNIFICANT RAINFALL, SEDIMENT CONTROL STRUCTURES WILL BE INSPECTED FOR INTEGRITY, ANY DAMAGED DEVICES SHALL BE CORRECTED IMMEDIATELY AT NO ADDITIONAL COST TO THE OWNER.
- THE IN PLACE SEDIMENT CONTROL MEASURES WILL BE MAINTAINED ON A CONTINUING BASIS UNTIL THE SITE IS PERMANENTLY STABILIZED AND ALL PERMIT REQUIREMENTS ARE MET.
- THE CONSTRUCTION OF SWALES SHALL BE PERFORMED PRIOR TO CONSTRUCTION OF IMPERVIOUS AREAS.
- EXISTING AND PROPOSED INLETS SHALL BE PROTECTED AT ALL TIMES WHERE AREAS OF EXPOSED SOIL DRAINS TO INLETS. INLET SEDIMENT BAG SHALL BE ULTRA-GRATEGUARD BY ULTRATECH INTERNATIONAL, INC. OR APPROVED EQUAL.
- THE CONTRACTOR SHALL MINIMIZE THE EXTENT OF EXPOSED EARTH AT ONE TIME DURING CONSTRUCTION AND UTILIZE WATERING TRUCKS TO WET THE EARTH DURING DRY MONTHS TO MINIMIZE EROSION DUE TO WIND.
- UPON COMPLETION OF CONSTRUCTION ALL DISTURBED AREAS, AS A MINIMUM, SHALL BE SEEDED AND MULCHED AND COMPACTED EQUIVALENT TO THAT OF NATIVE SURROUNDING EARTH.
- CONTRACTOR SHALL NOTIFY THE ENGINEER IF EROSION CONTROL ISSUES DEVELOP ONSITE.
- SAW-CUT CLEAN EDGES AND MATCH EXISTING GRADE FOR ALL DEMOLITION TIE-IN LOCATIONS. APPLY TACK COAT ON ALL EDGES PER FDOT 300.
- STRIPPINGS (6" DEPTH) INTENDED FOR USE AS TOPSOIL PER FDOT 987.
- SAW CUT MIN 2 FOOT BACK OR PER FLEX BUTT JOINT DETAIL, TYPICAL PAVEMENT SECTION AND DETAILS SHEET(S), WHICHEVER IS GREATER. BUTT JOINT REQUIRES TACK AND CLEAN SAW CUT FOR THE FULL LENGTH OF THE TIE-IN.
- CONTRACTOR SHALL PROTECT EXISTING SIGNS NOT TO BE REMOVED/REPLACED TO ENSURE THEY ARE NOT DAMAGED DURING CONSTRUCTION. IF SIGNS ARE DAMAGED THEY SHALL BE REPLACED BY CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
- CONTRACTOR SHALL BE REQUIRED TO CLEAN EXISTING DRAINS AND PIPES. ALL PIPES AND DRAINS SHALL BE FREE FROM DIRT AND DEBRIS PRIOR TO OWNER ACCEPTING THE PROJECT.
- CONTRACTOR TO USE EXTREME CAUTION IN PREVENTING DAMAGE TO PAVEMENT SURFACES WHERE MARKINGS ARE TO BE REMOVED AND THE EXISTING PAVEMENT TO REMAIN. CONTRACTOR SHALL USE WATER BLASTING TO BE REMOVE MARKINGS WITH MINIMAL DAMAGE. TEST AREA SHALL BE PERFORMED IN THE PRESENCE OF THE RPR PRIOR TO FULL REMOVAL.

ELECTRICAL DEMOLITION NOTE:

REFERENCE SHEETS E101 TO ##### FOR ELECTRICAL DEMOLITION, INCLUDING SIGNAGE

LEGEND

- EXISTING PAVEMENT
- EXISTING CONTOUR
- RSA RUNWAY SAFETY AREA
- ROFA RUNWAY OBJECT FREE AREA
- TOFA TAXIWAY/TAXILANE OBJECT FREE AREA
- EXISTING STORM PIPE
- EXISTING STORM INLET
- RUNWAY/TAXIWAY LIGHT
- LIGHTING
- SERVICE CABINET
- UNKNOWN MANHOLE
- WIRING PULL BOX
- WINDCONE
- EXISTING PAVEMENT
- EXISTING FENCE TO REMAIN
- PAVEMENT MARKING REMOVAL
- MILLING - 0.5"
- MILLING - 0.5" TO 2.5" VARIABLE
- MILLING - 3.0"
- MILLING - 0.5" TO 1.5" VARIABLE SHOULDER
- MILLING - 1.5" SHOULDER
- FULL DEPTH REMOVAL
- INLET PROTECTION

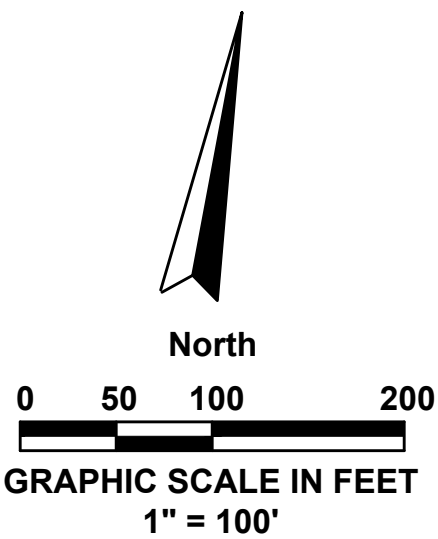

CALL 2 WORKING DAYS BEFORE YOU DIG **811**
IT'S THE LAW! DIAL 811 Know what's below. Call before you dig.
SUNSHINE STATE ONE CALL OF FLORIDA, INC.



EXISTING CONDITIONS AND DEMOLITION PLAN (SHEET 1 OF 3)
ISSUED FOR BID DRAWINGS

RUNWAY 8-26 REHABILITATION
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025


SHEET NUMBER
C-1

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

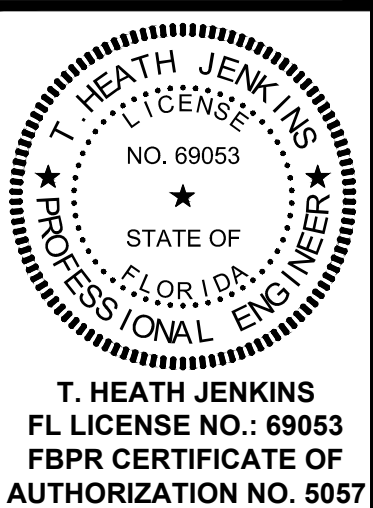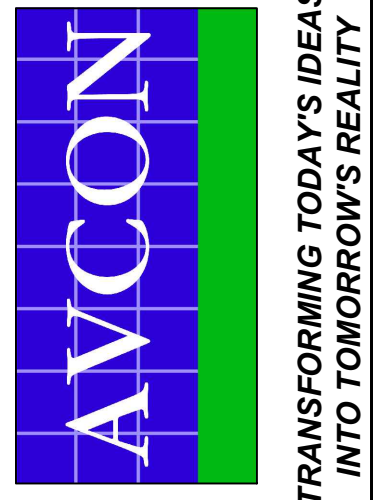

NO.	DATE	REVISION	BY
1	4-22-25	ADDENDUM #3	JLW


N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_DETAILS.DWG 4/22/2025 1:17 PM

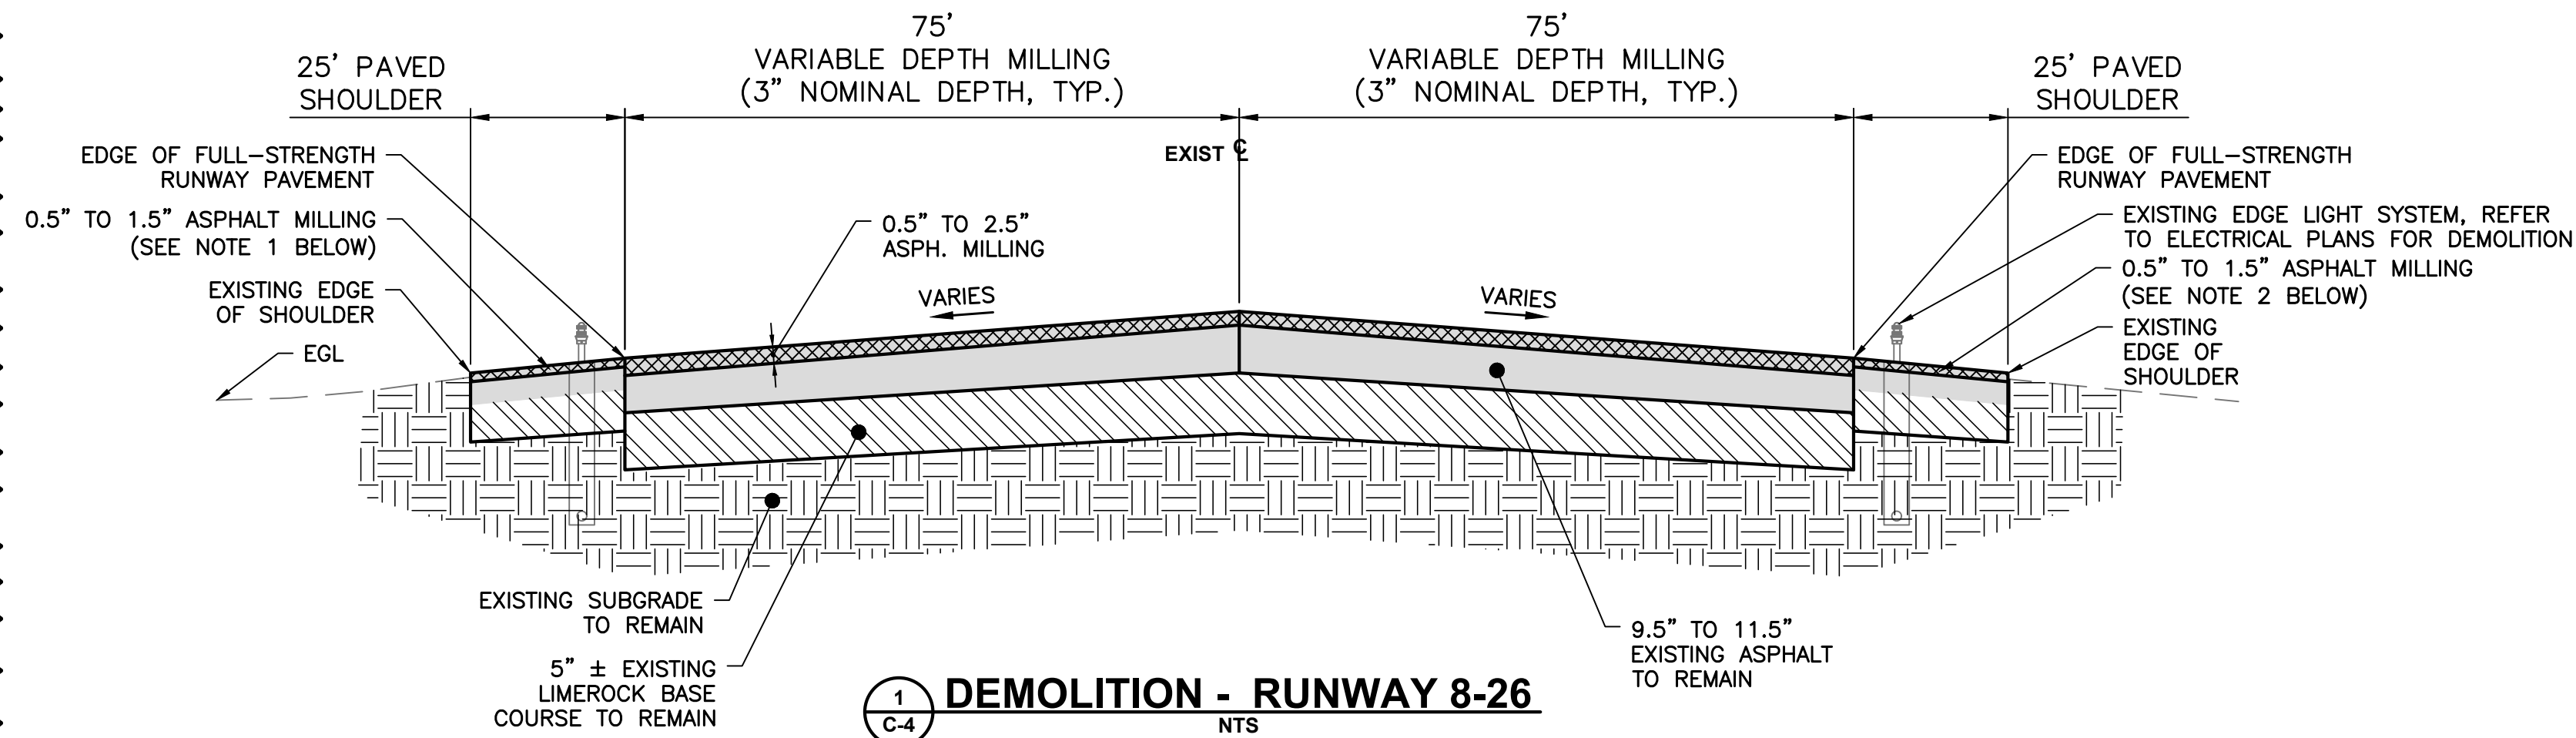

NOTE 1 - FULL DEPTH REMOVAL
(LEFT SHOULDER)
STA 3+75 TO STA 4+50
STA 18+50 TO STA 19+50

STA 2+00 TO STA 4+50
STA 17+50 TO STA 19+50
STA 30+00 TO STA 72+00


NOTE 2 - FULL DEPTH REMOVAL
(RIGHT SHOULDER)
STA 2+00 TO STA 4+50

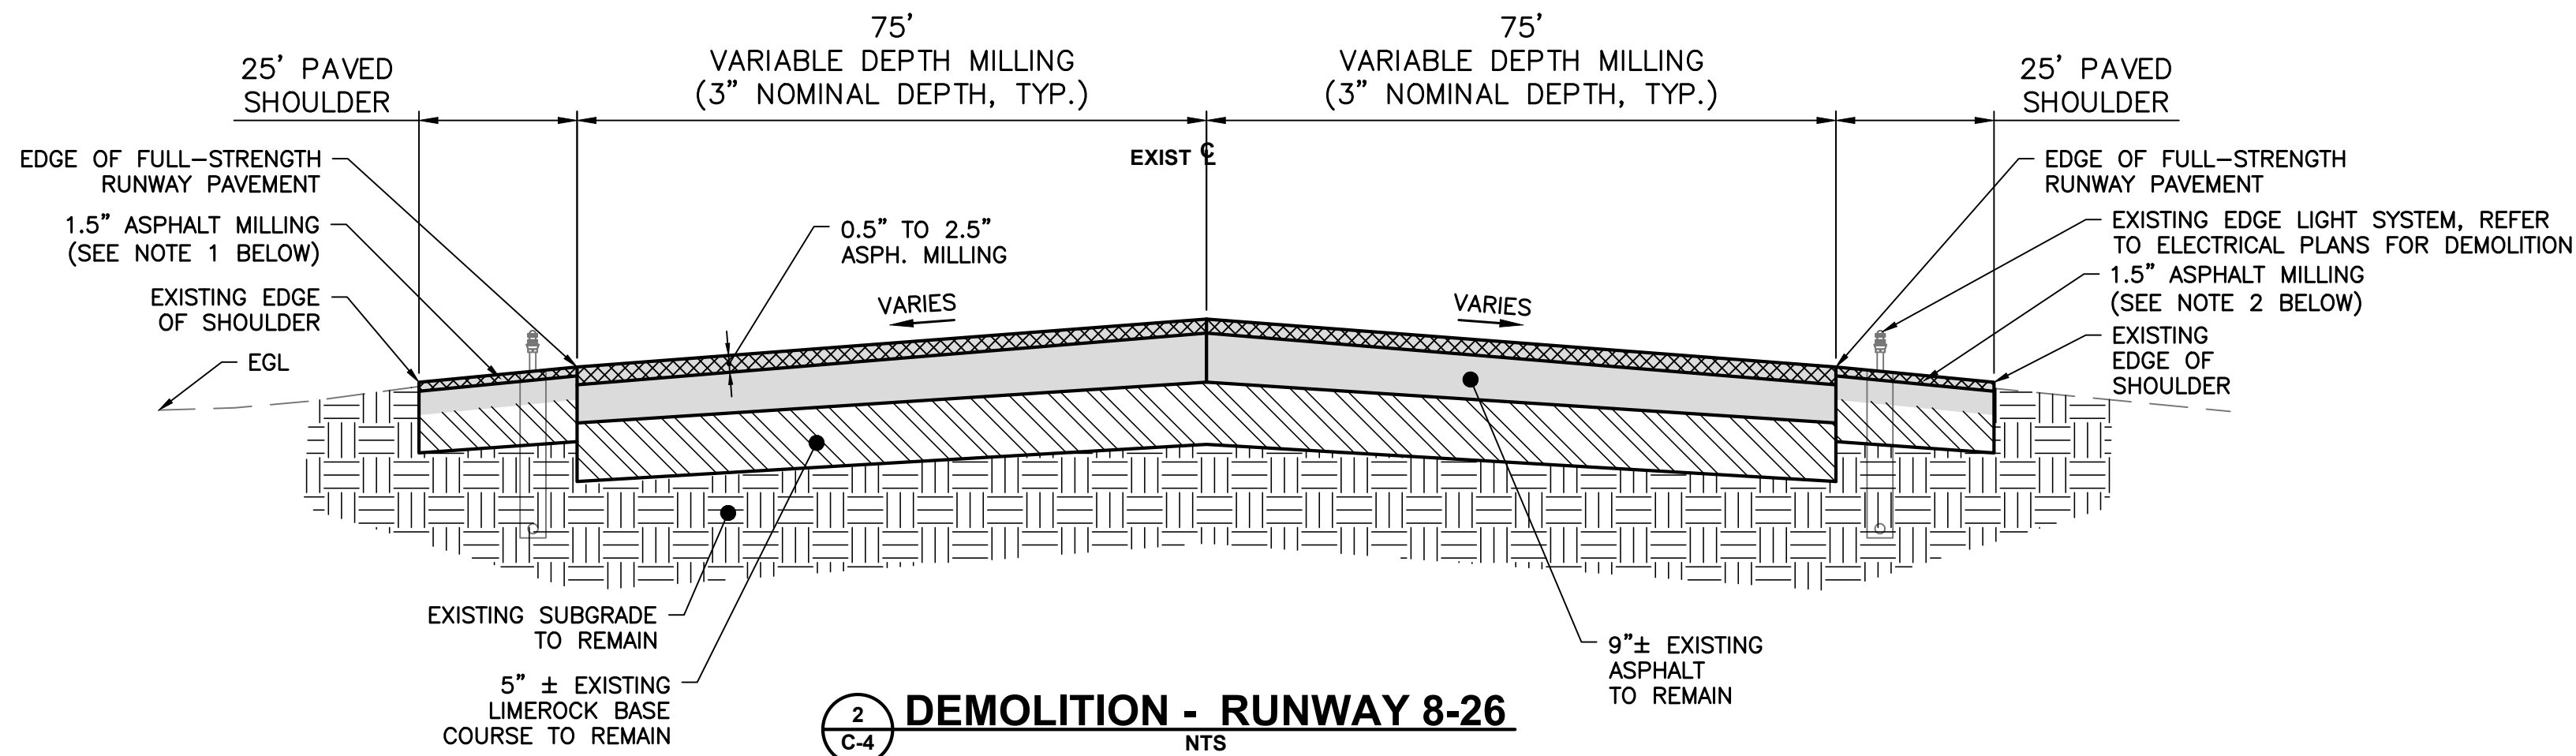

NOTE 1 - FULL DEPTH REMOVAL
(LEFT SHOULDER)
STA 4+50 TO STA 6+50
STA 19+50 TO STA 21+50

STA 4+50 TO STA 6+50
STA 19+50 TO STA 30+00



NOTE 2 - FULL DEPTH REMOVAL
(RIGHT SHOULDER)
STA 4+50 TO STA 6+50

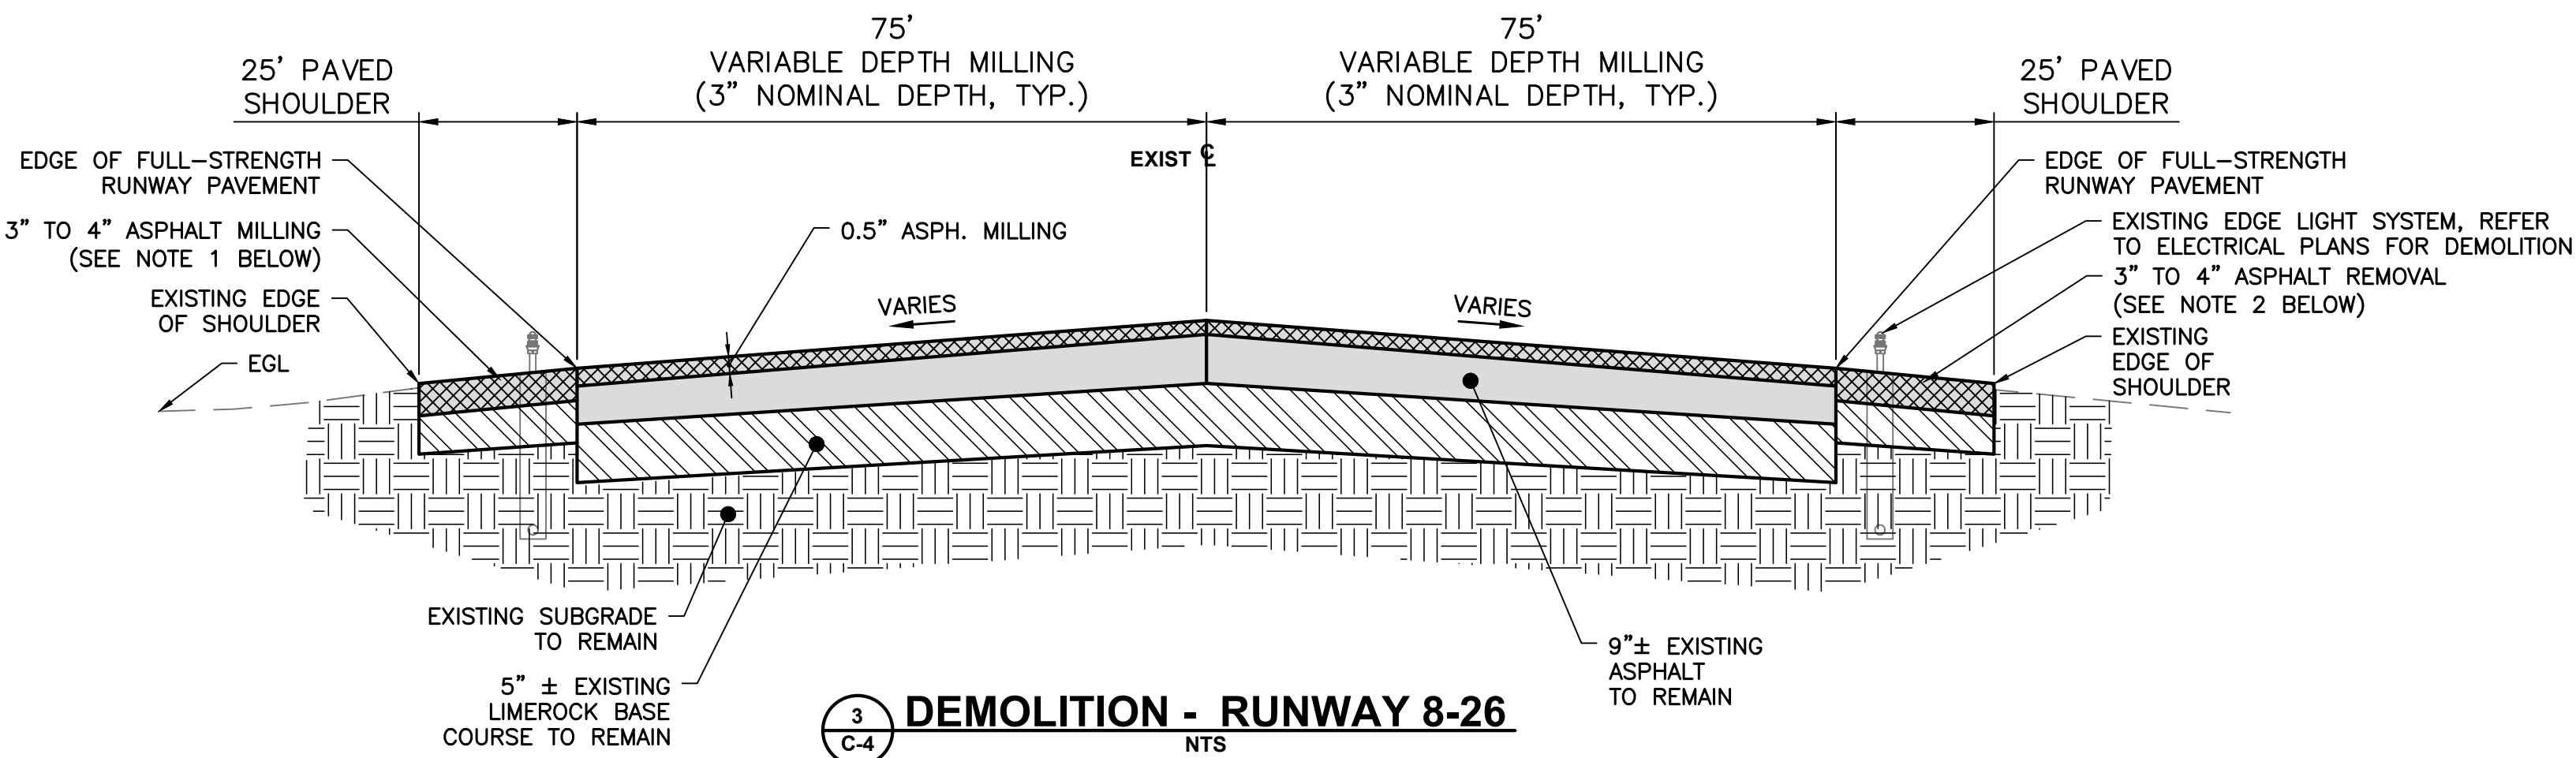

NOTE 1 - FULL DEPTH REMOVAL
(LEFT SHOULDER)
STA 6+50 TO STA 10+75
STA 12+25 TO STA 17+50

STA 6+50 TO STA 17+50

NOTE 2 - FULL DEPTH REMOVAL
(RIGHT SHOULDER)
STA 6+50 TO STA 17+50

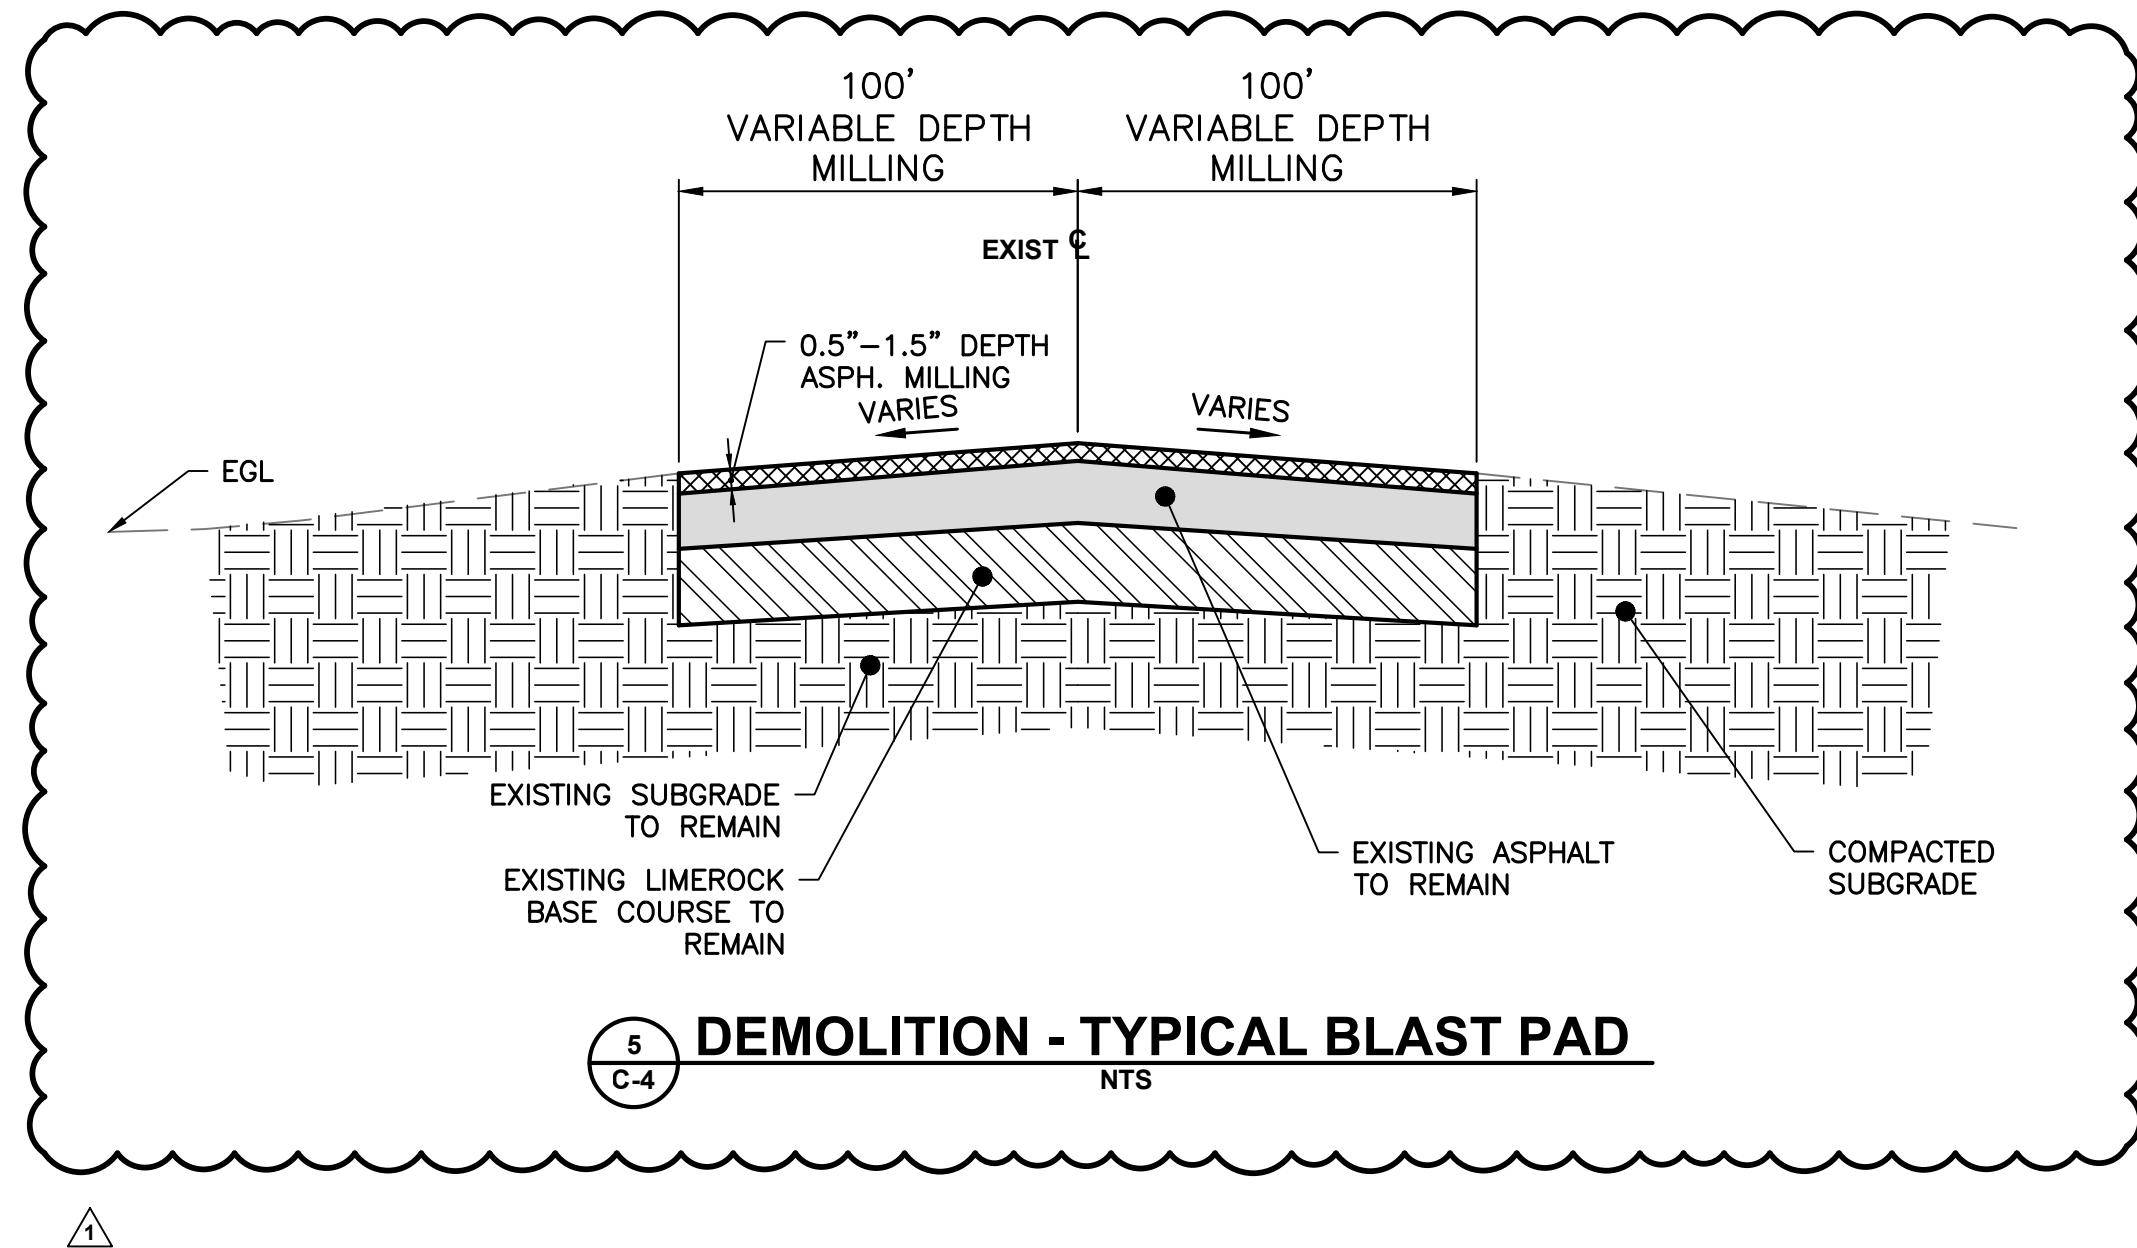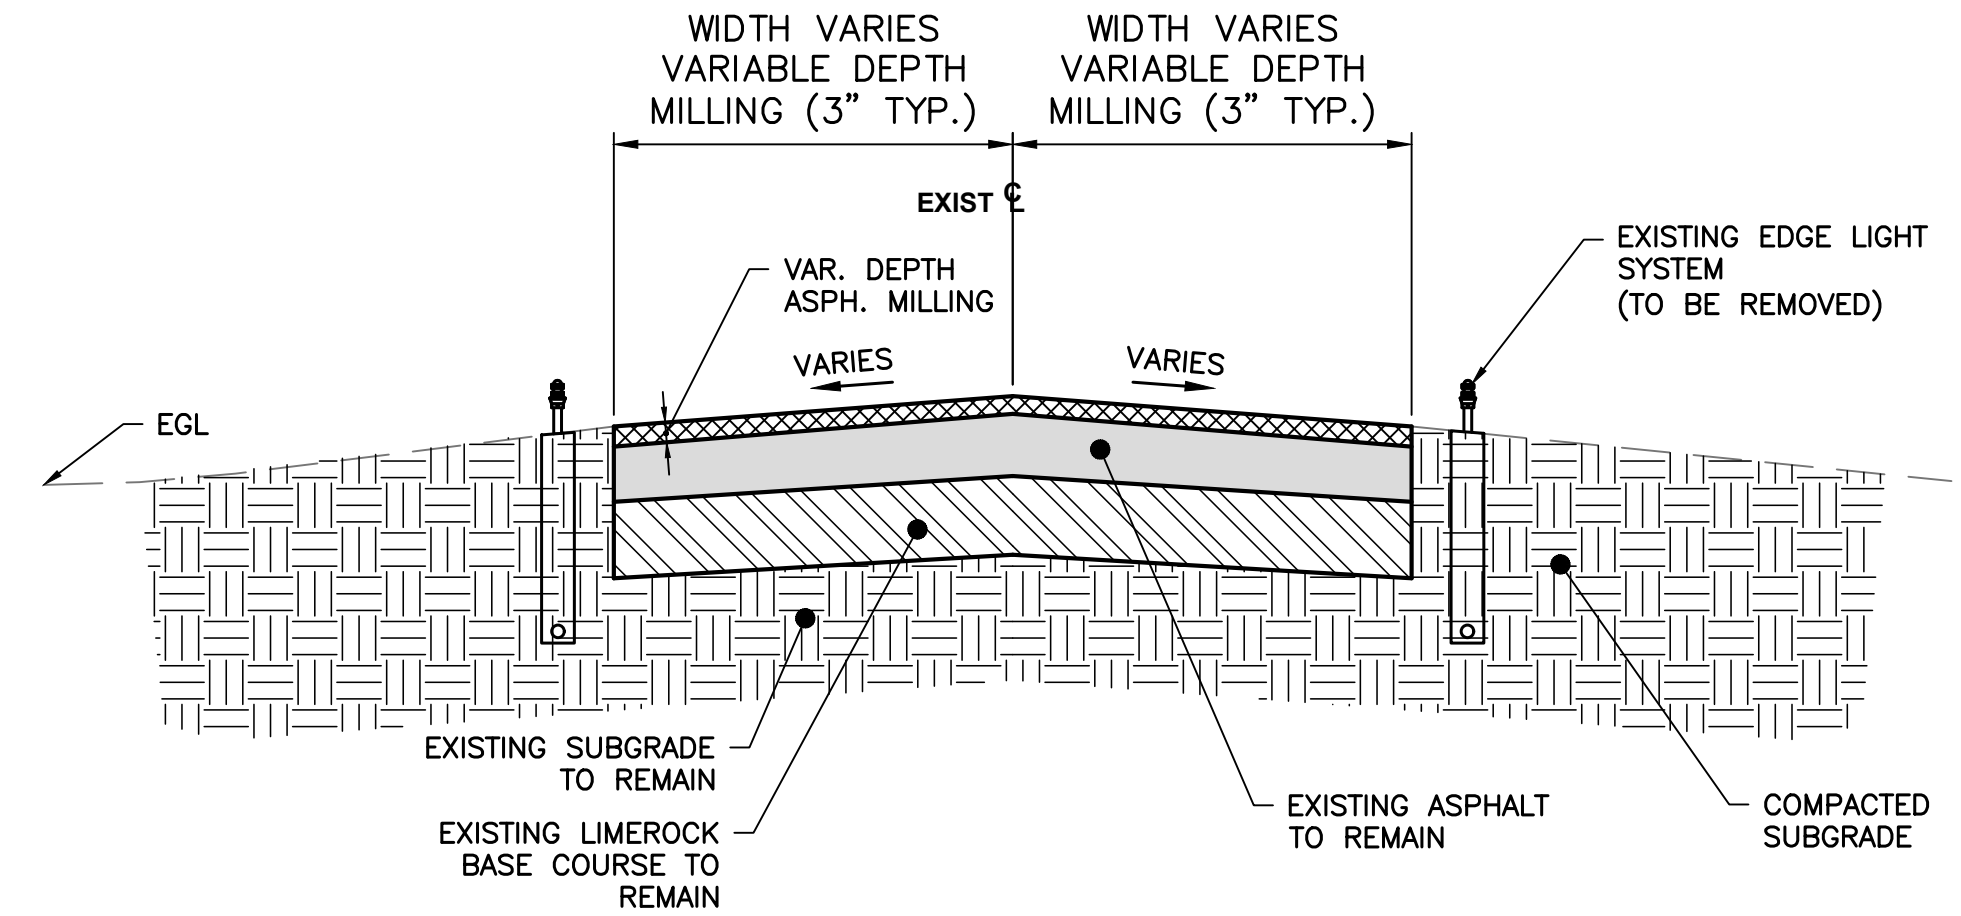

NO.	DATE	REVISION	BY
1	4/22/25		JLW


PAVEMENT SECTIONS
DEMOLITION
ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025


SHEET NUMBER
C-4

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901-DETAILS.DWG 4/23/2025 2:48 PM

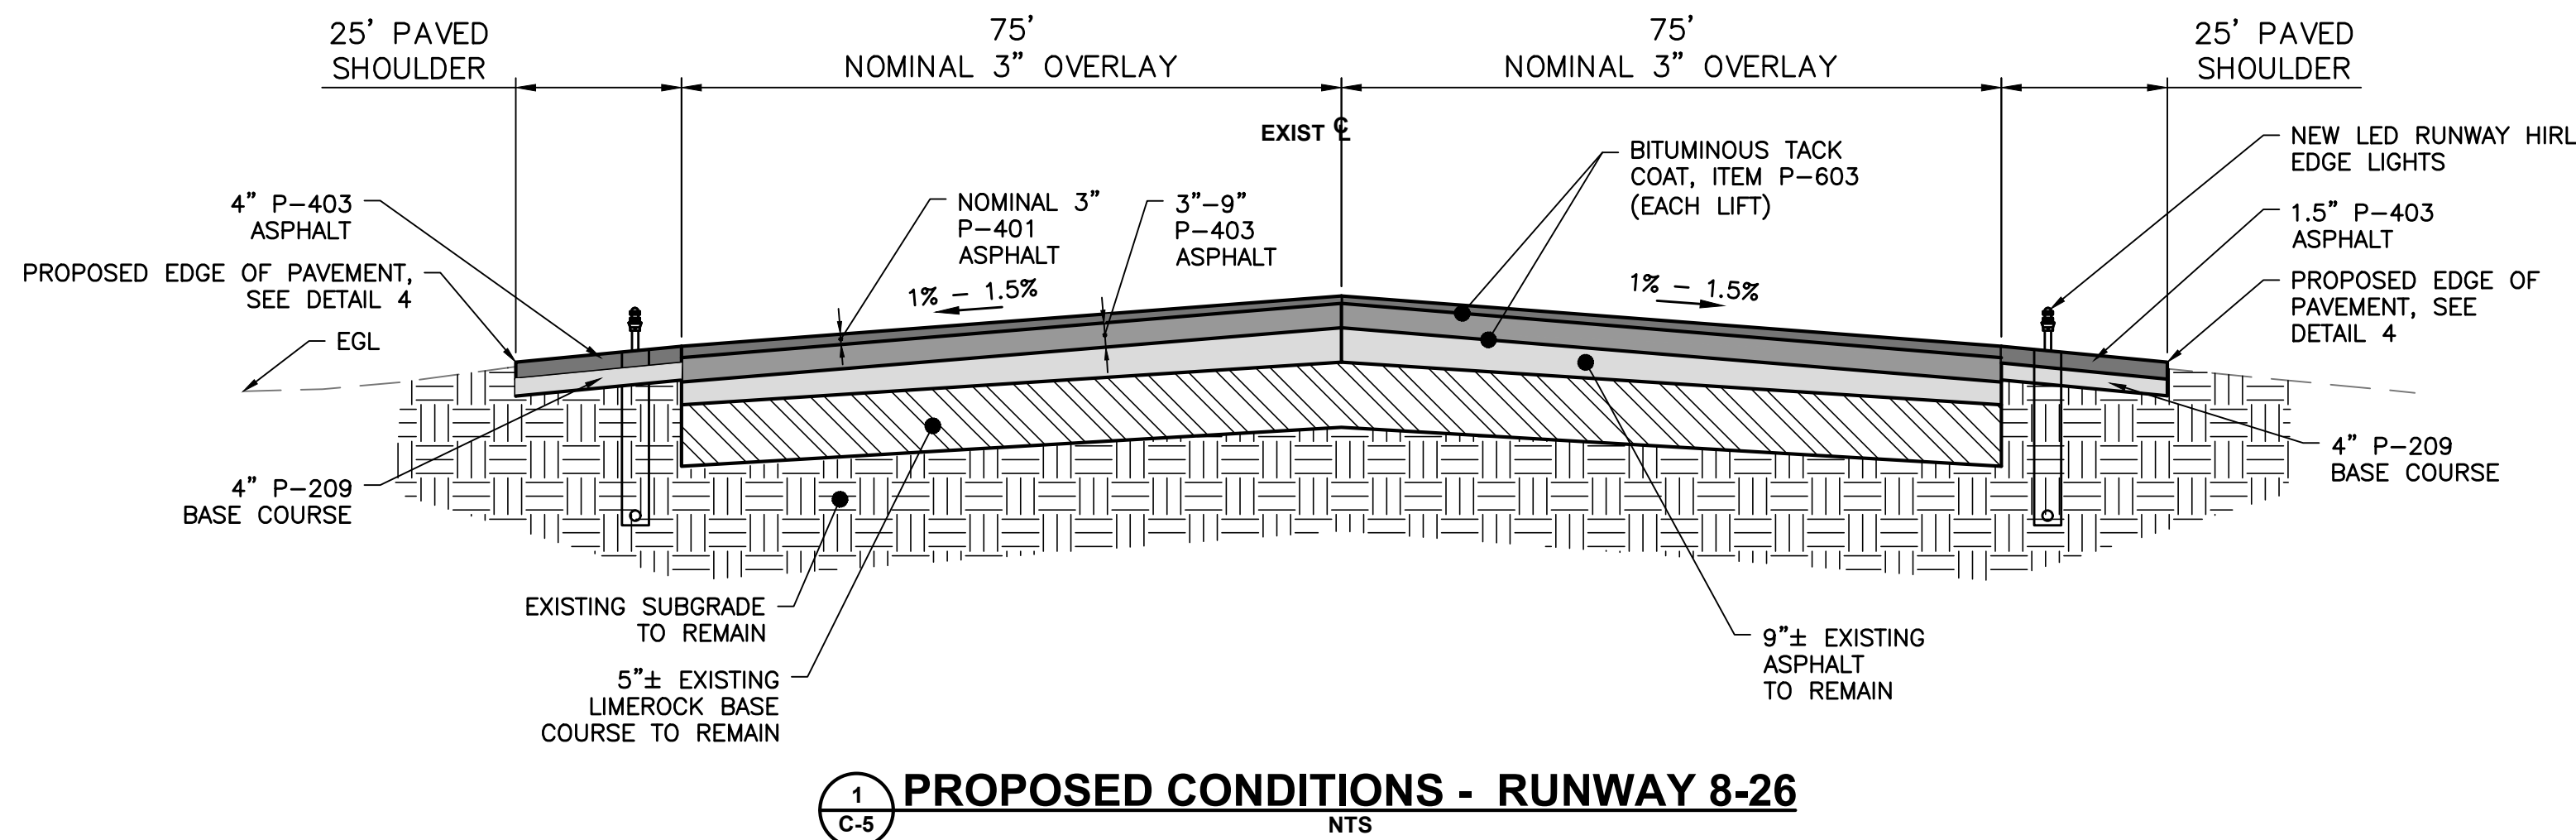


1
C-5
PROPOSED CONDITIONS - RUNWAY 8-26
NTS

STA 2+00 TO STA 4+50
STA 6+50 TO STA 17+75

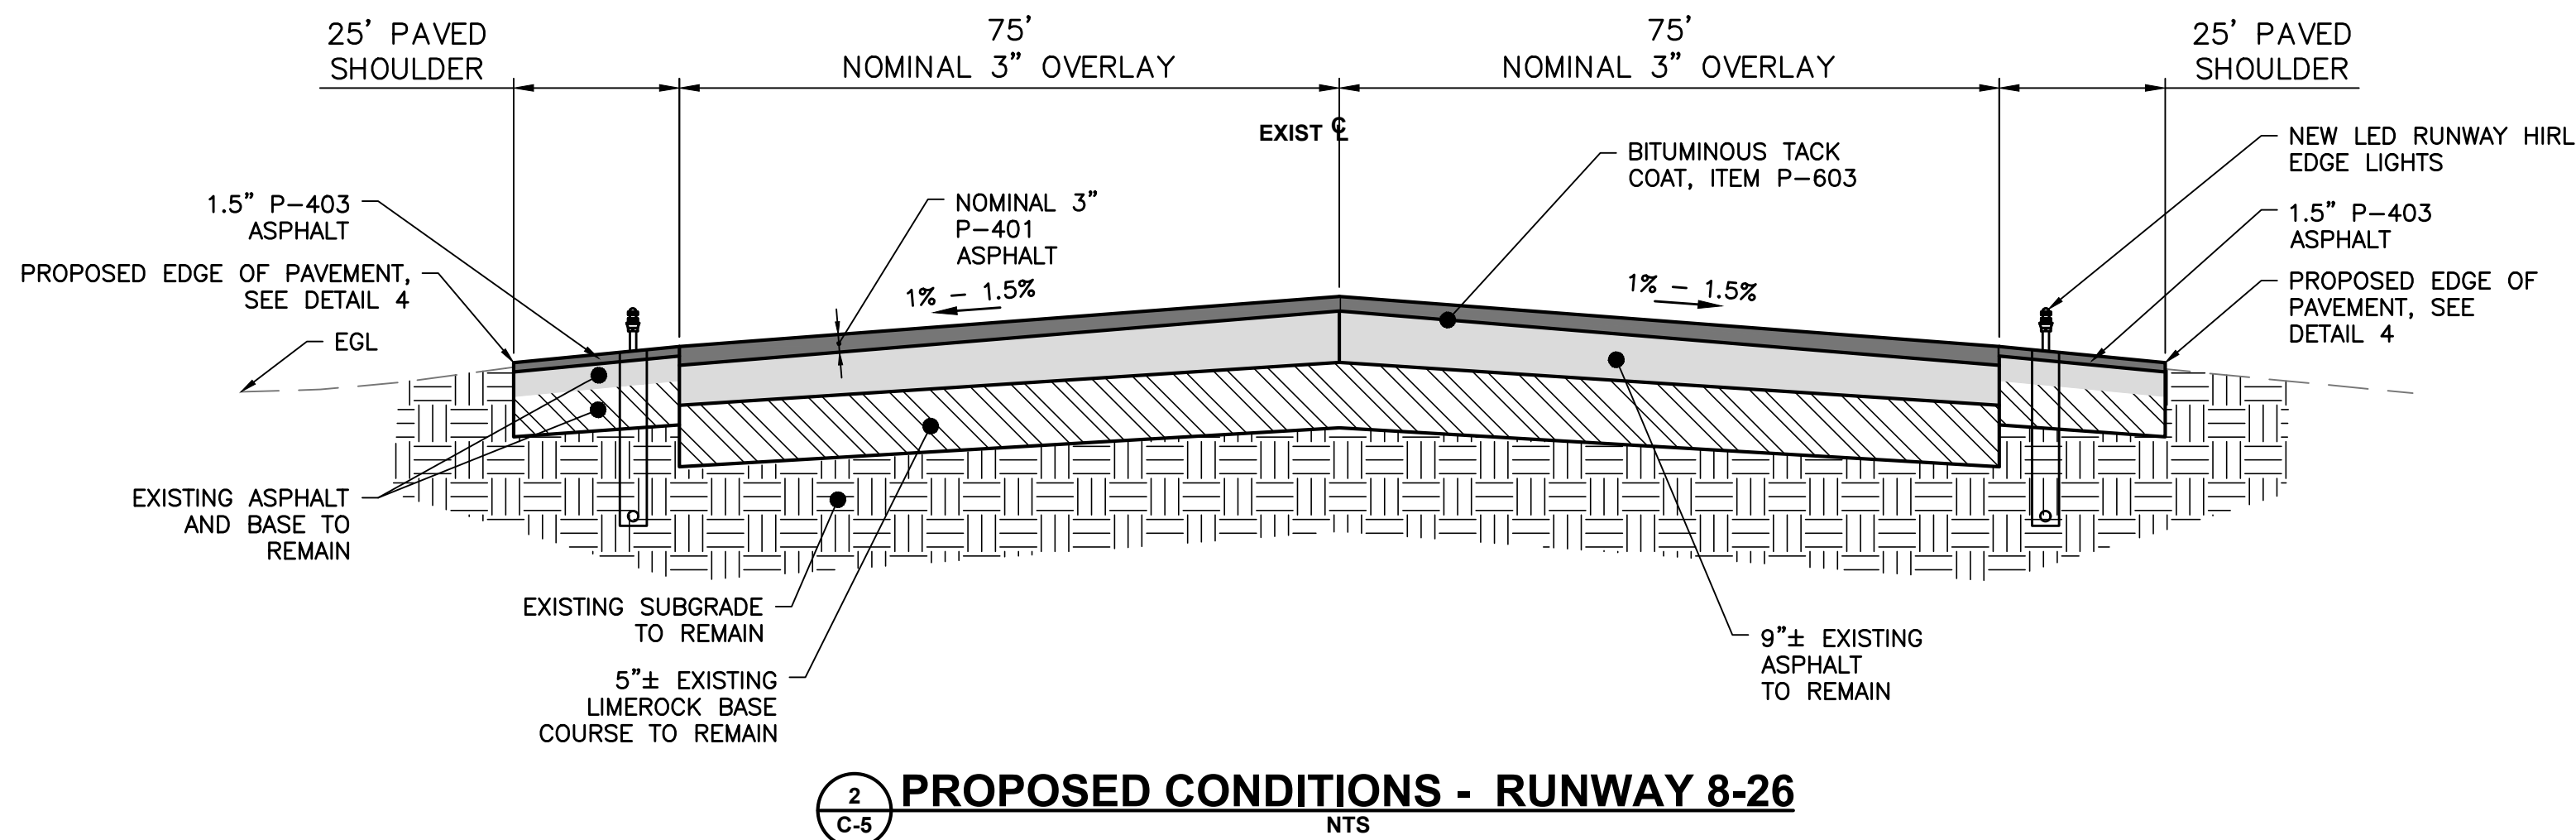


2
C-5
PROPOSED CONDITIONS - RUNWAY 8-26
NTS

STA 4+50 TO STA 6+50
STA 17+50 TO STA 72+00

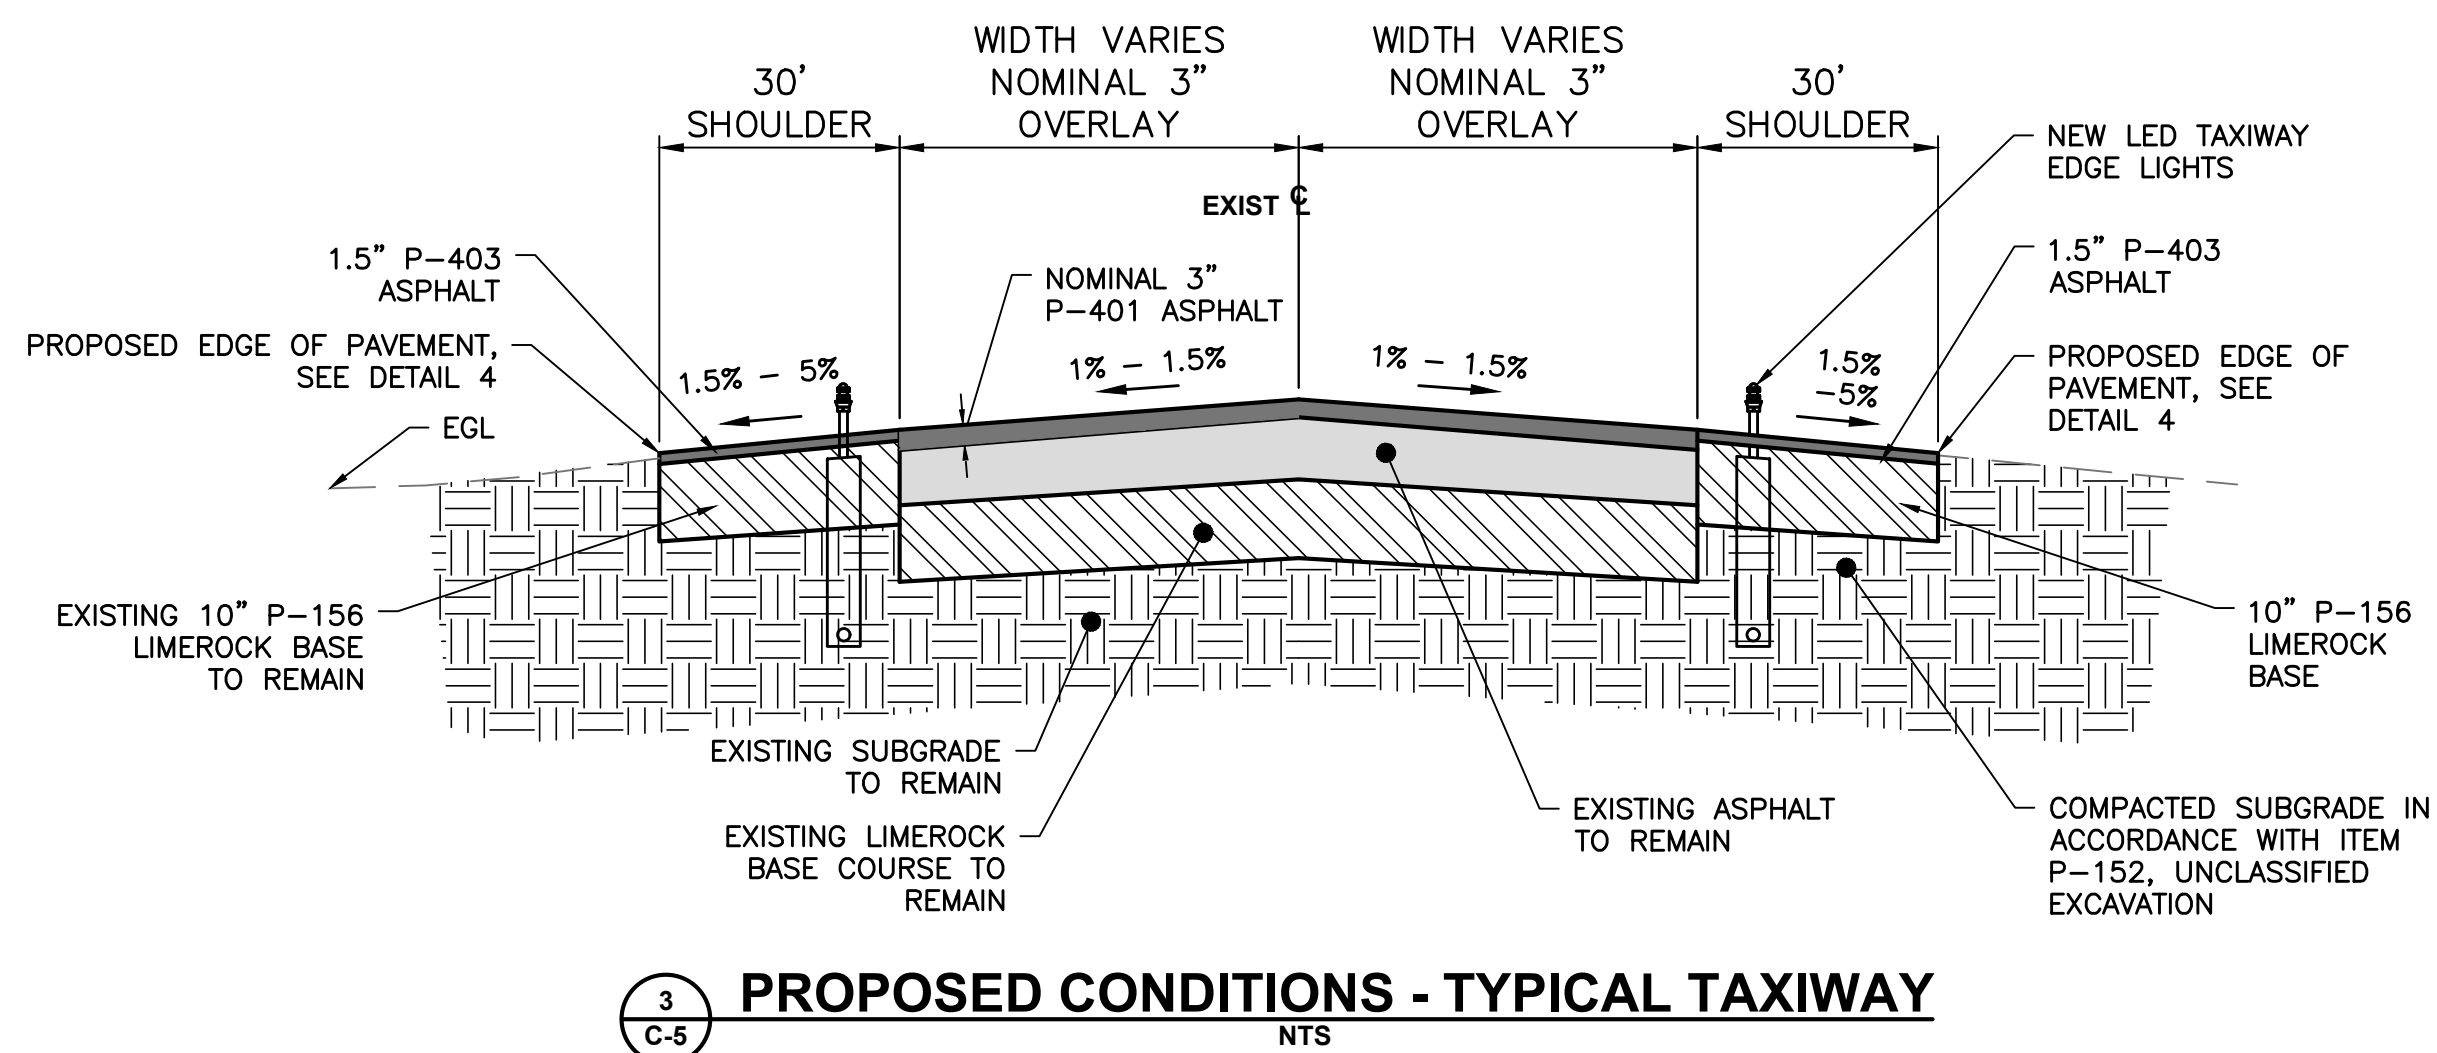


3
C-5
PROPOSED CONDITIONS - TYPICAL TAXIWAY
NTS

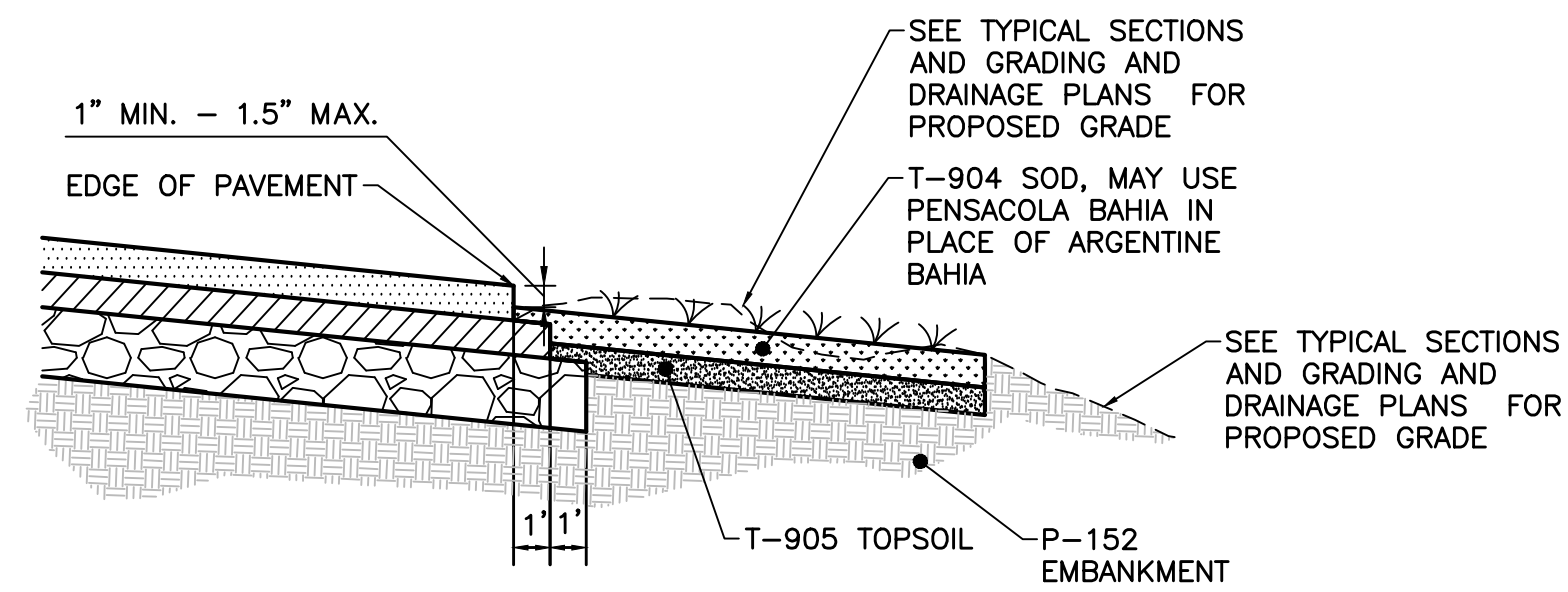


4
C-5
EDGE DROP OFF DETAIL - EOP TO TURF
NTS


TYPICAL, 2 SIDES

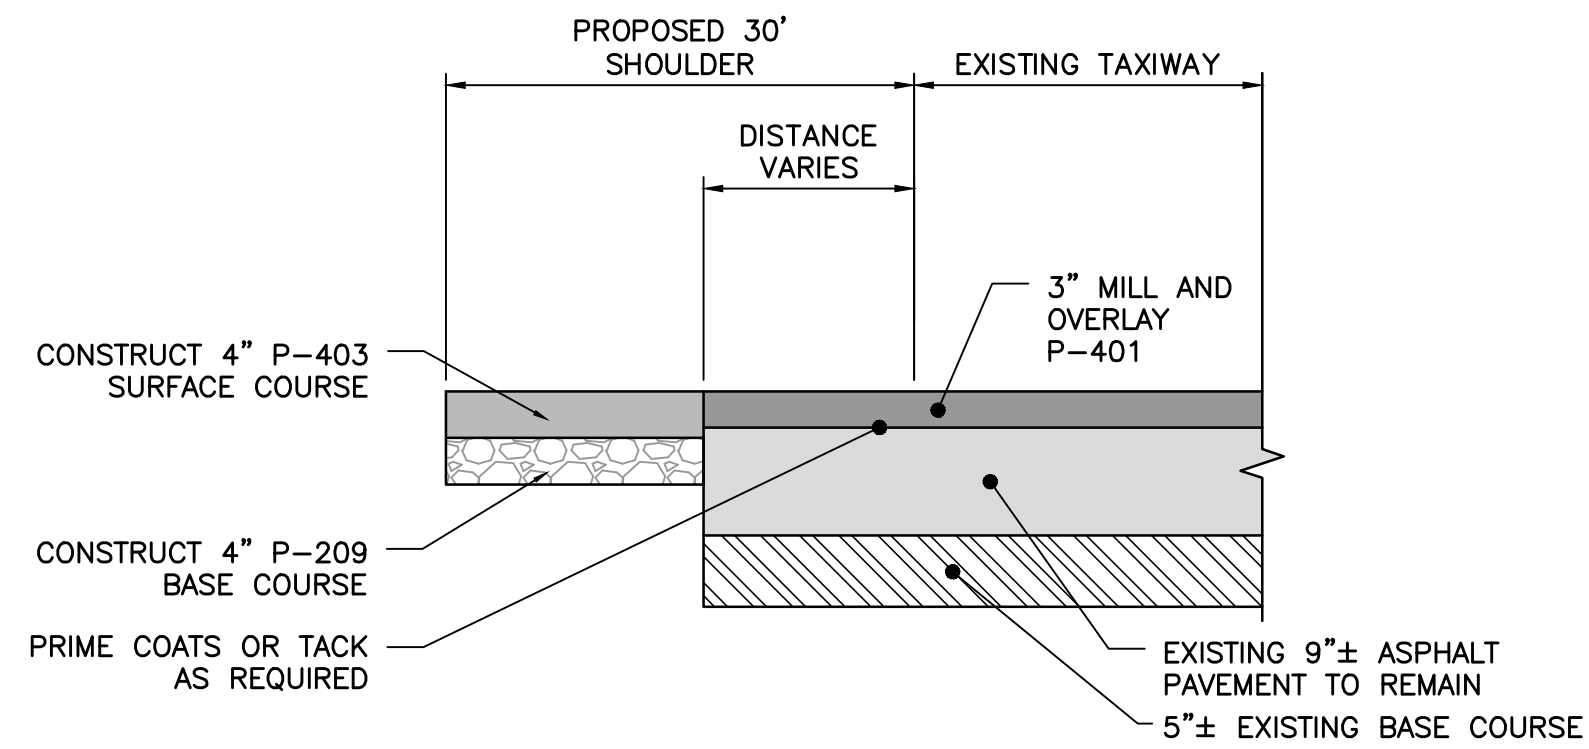

5
C-5
TYPICAL TAXIWAY SHOULDER
NTS

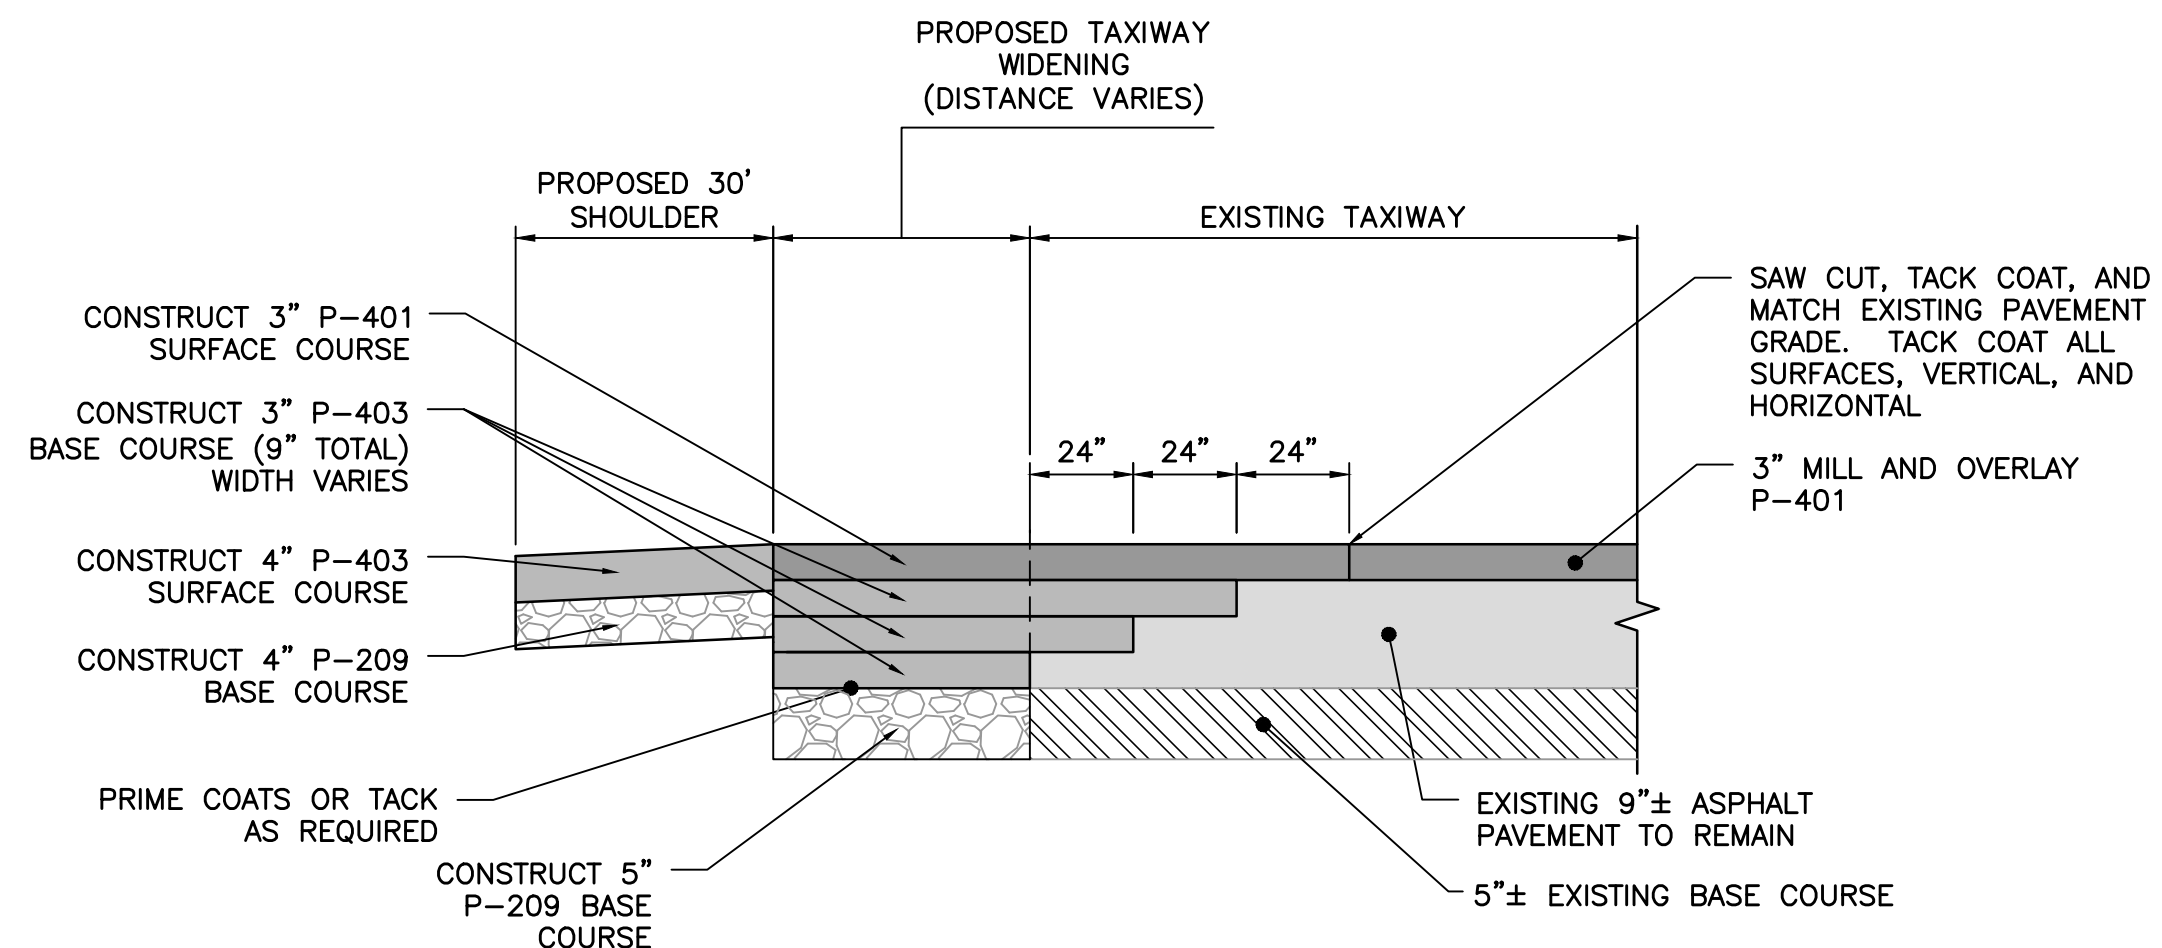

6
C-5
TAXIWAY A AND B2 WIDENING
NTS

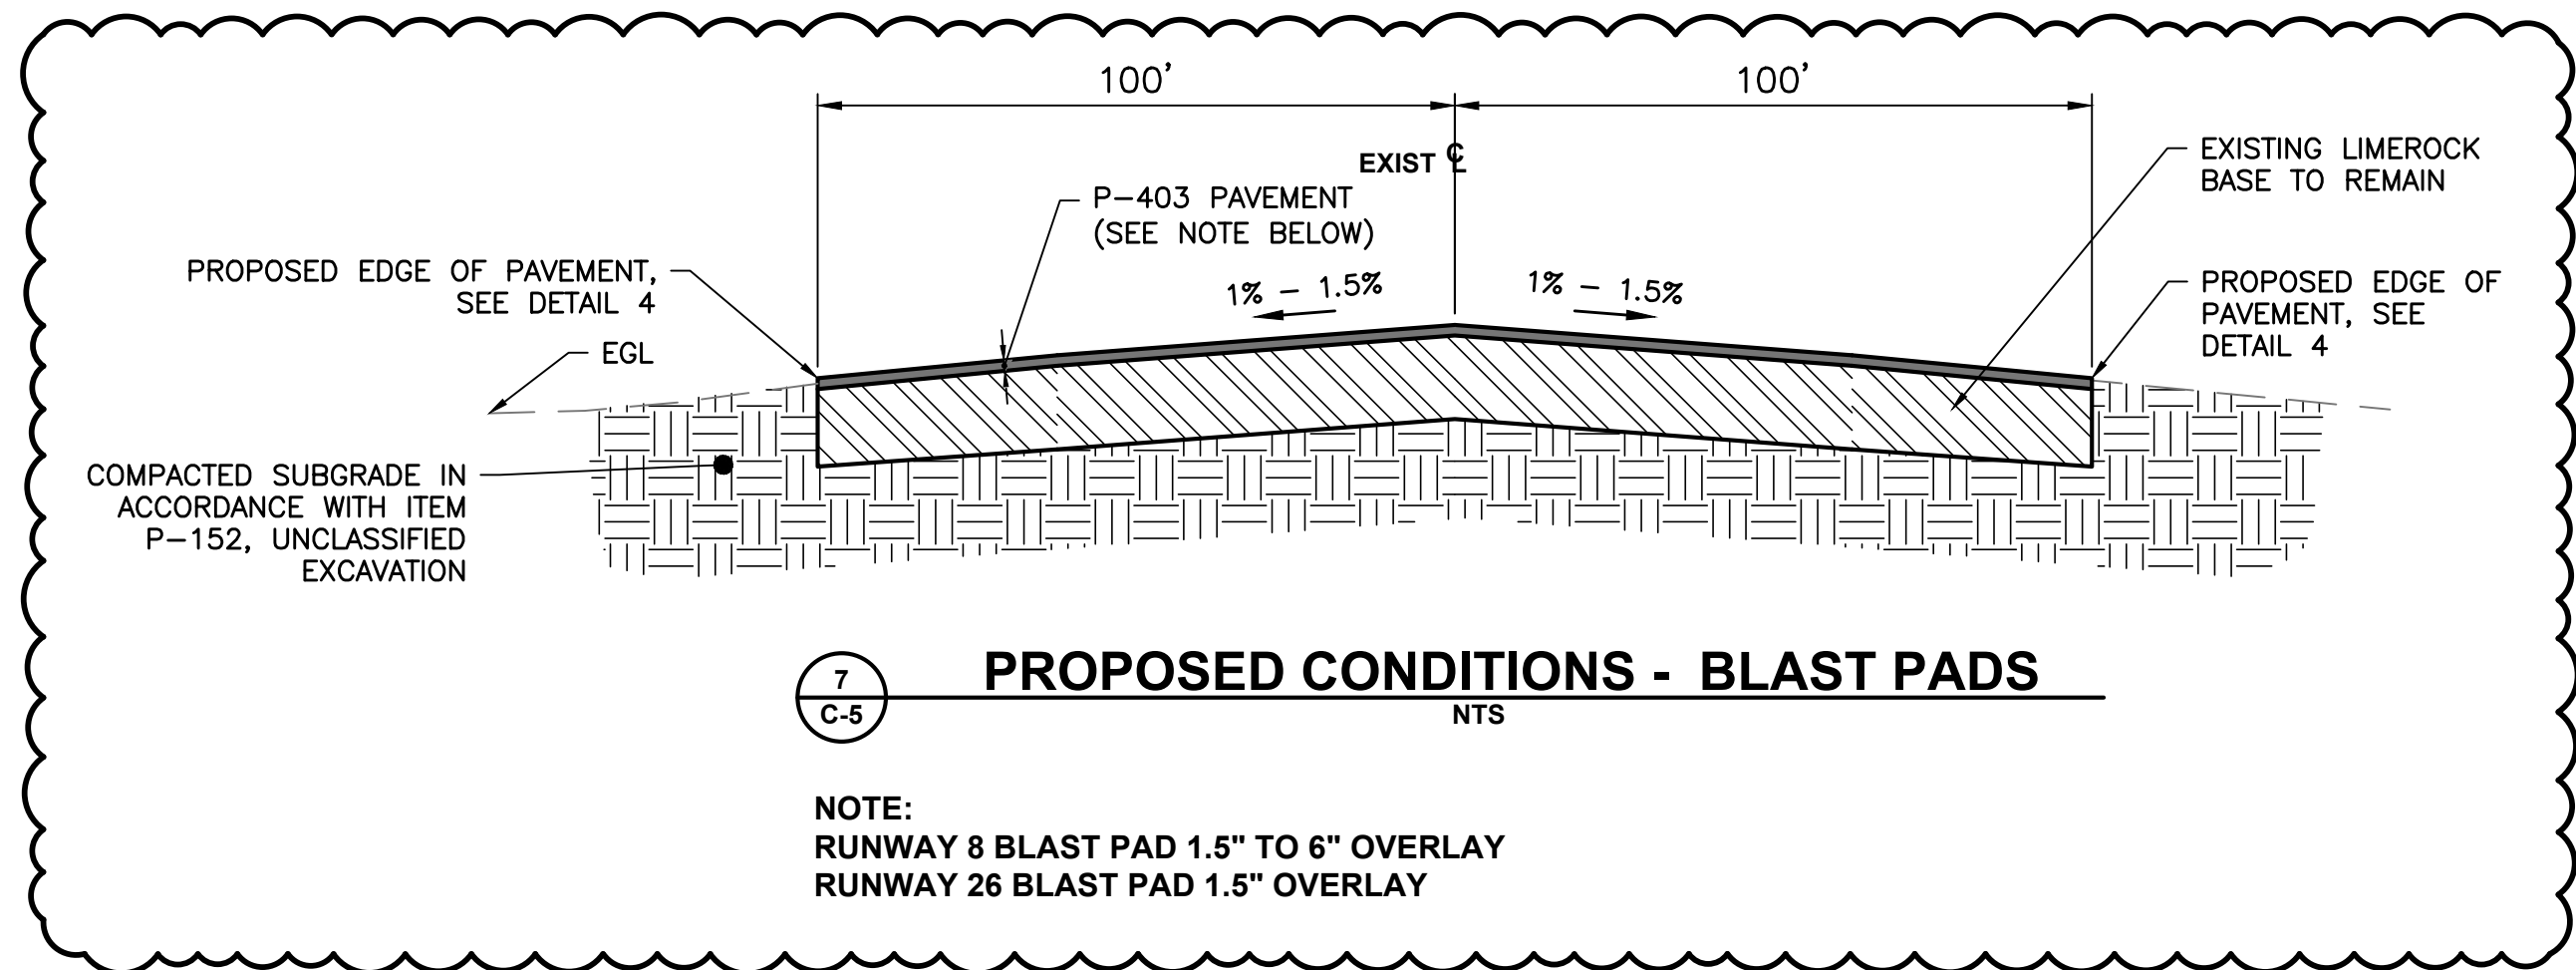

7
C-5
PROPOSED CONDITIONS - BLAST PADS
NTS

NOTE:
RUNWAY 8 BLAST PAD 1.5" TO 6" OVERLAY
RUNWAY 26 BLAST PAD 1.5" OVERLAY

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

AVCON
TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF
AUTHORIZATION NO. 5057

NO.	DATE	REVISION	BY


**PAVEMENT SECTIONS
PROPOSED
CONDITIONS**
ISSUED FOR BID DRAWINGS

**RUNWAY 8-26
REHABILITATION**
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

**SHEET NUMBER
C-5**

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_OVERALL DRAINAGE PLAN.DWG 4/23/2025 2:45 PM

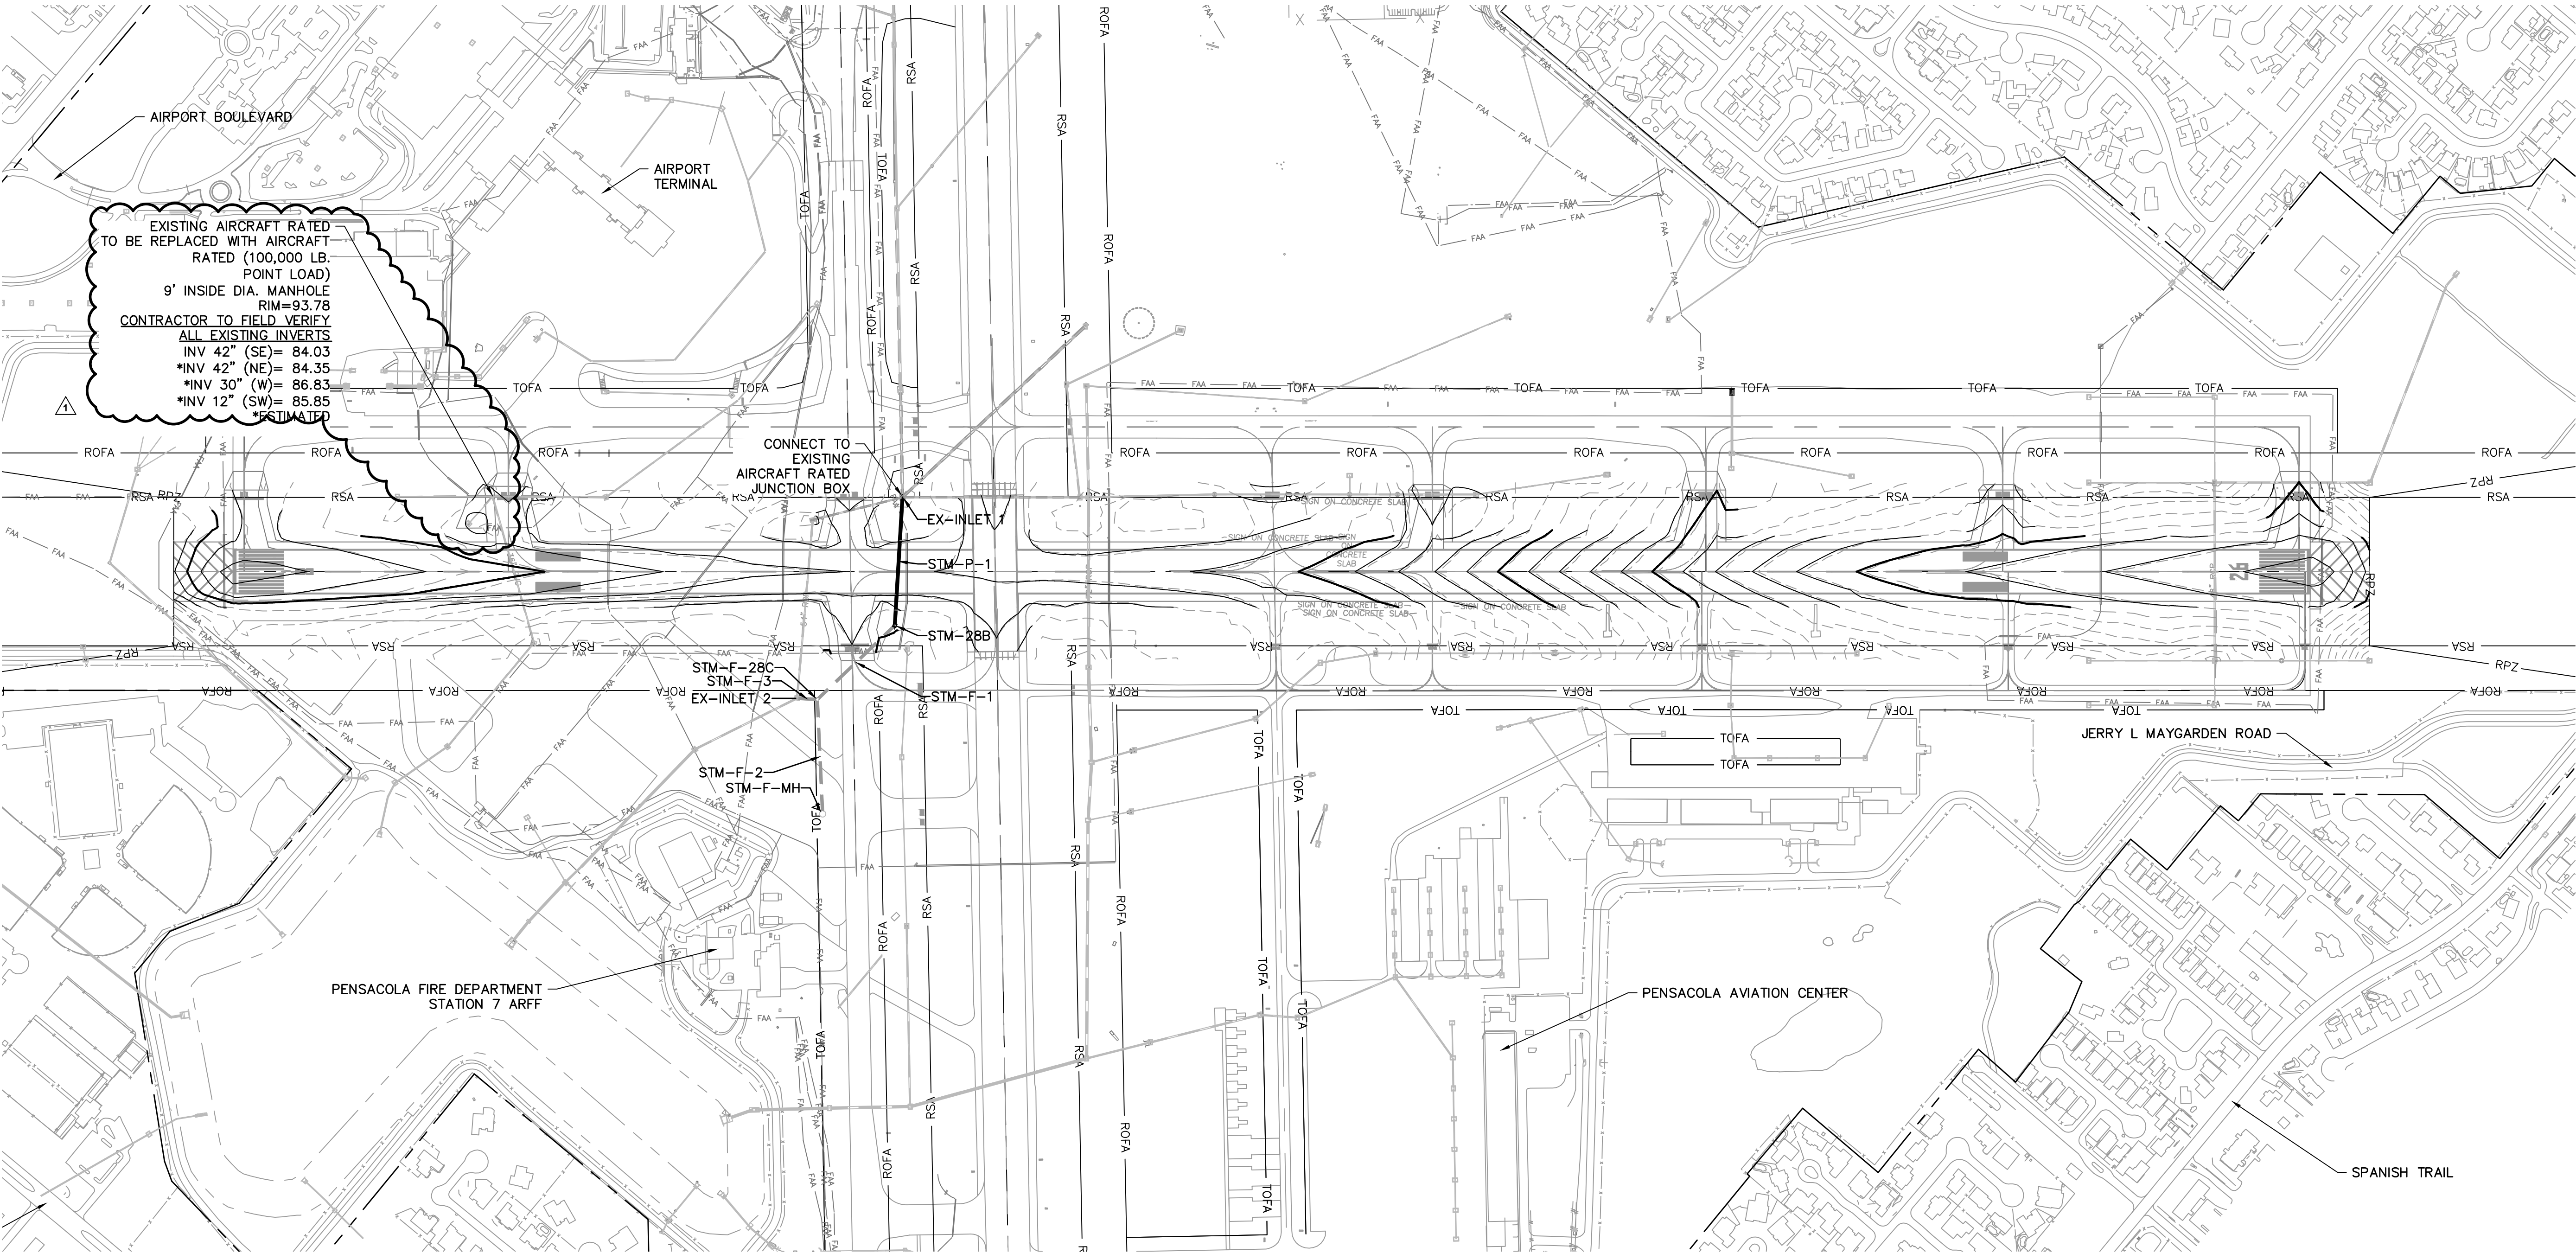

DRAINAGE NOTES:

- CONTRACTOR SHALL NOTIFY THE ENGINEER IF EROSION CONTROL ISSUES DEVELOP ONSITE.
- CONTRACTOR SHALL BE RESPONSIBLE FOR EROSION CONTROL MEASURES ON SITE 24 HOURS A DAY THROUGHOUT CONSTRUCTION.
- ALL DISTURBED AREAS (INCLUDING RE-GRADED AREA) SHALL BE RETURNED TO ORIGINAL CONDITION.
- EXCAVATION LIKELY TO DISLOCATE, DAMAGE, OR IMPAIR THE STRENGTH OF OTHER STRUCTURES ALREADY IN PLACE SHALL BE DONE ONLY AFTER ADEQUATE PROTECTION HAS BEEN PROVIDED FOR THE IN-PLACE STRUCTURES.
- UNPAVED AREAS SHALL BE GRADED TO PROMOTE POSITIVE DRAINAGE TO THE STORMWATER DETENTION AREA OR ASSOCIATED INLET.

STORMWATER STRUCTURE TABLE			
STRUCTURE NAME	STRUCTURE TYPE	DETAILS	NORTHING/EASTING
EX-INLET 1	EXISTING AIRCRAFT RATED INLET	RIM = 90.93 STM-EX-2 INV IN = 82.29 STM-EX-3 INV IN = 79.85 STM-EX-4 INV IN = 80.85 STM-P-1 INV OUT = 79.85 STM-EX-1 INV OUT = 82.00	N: 545788.88 E: 1121430.7019
EX-INLET 2	EXISTING 16.5'X16.5' MANHOLE W/ J BOTTOM	RIM = 86.40 STM-F-3 INV IN = 76.50	N: 545057.96 E: 1121206.5400
STM-28B	10'x10" MANHOLE W/J BOTTOM	RIM = 90.28 STM-P-1 INV IN = 78.34 STM-F-1 INV OUT = 78.34	N: 545360.07 E: 1121484.5600
STM-F-28C	FUTURE 16.5'X16.5' MANHOLE W/J BOTTOM	RIM = 86.50 STM-F-1 INV IN = 77.70 STM-F-3 INV OUT = 77.70 STM-F-2 INV OUT = 77.54	N: 545067.00 E: 1121273.8400
STM-F-MH	FUTURE 12' DIA. MANHOLE W/J BOTTOM	RIM = 84.67 STM-F-2 INV IN = 75.90	N: 544690.92 E: 1121362.1000

STORMWATER PIPE TABLE			
NAME	DESCRIPTION	LENGTH	SLOPE
STM-EX-1	EXISTING 48" CL V RCP	308.84'	0.68%
STM-EX-2	EXISTING 48" CL V RCP	595.84'	0.63%
STM-EX-3	EXISTING 84" CL V RCP	351.61'	1.18%
STM-EX-4	EXISTING 72" CL V RCP	839.40'	0.78%
STM-F-1	FUTURE 84" CL V RCP	360.96'	0.18%
STM-F-2	FUTURE 84" CL V RCP	386.30'	0.42%
STM-F-3	FUTURE 84" CL V RCP	67.90'	1.77%
STM-P-1	84" CL V RCP	432.18'	0.35%

CALL 2 WORKING DAYS BEFORE YOU DIG

IT'S THE LAW!


DIAL 811

Know what's below. Call before you dig.

SUNSHINE STATE ONE CALL OF FLORIDA, INC.

LEGEND

- RPZ RUNWAY PROTECTION ZONE
- RSA RUNWAY SAFETY AREA
- ROFA RUNWAY OBJECT FREE AREA
- TOFA TAXIWAY/TAXILANE OBJECT FREE AREA
- FAA EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING PAVEMENT
- EXISTING STORM PIPE
- PROPOSED STORM PIPE
- EXISTING STORM INLET
- PROPOSED STORM JUNCTION BOX

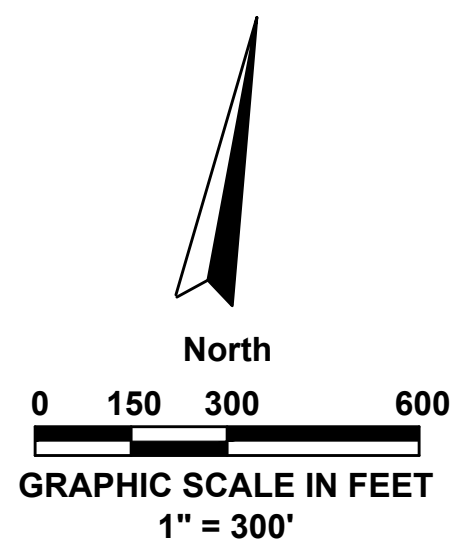

OVERALL DRAINAGE PLAN

ISSUED FOR BID DRAWINGS

RUNWAY 8-26 REHABILITATION

PREPARED FOR

PENSACOLA INTERNATIONAL AIRPORT



DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

C-6

AVCON, INC.
ENGINEERS & PLANNERS

3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

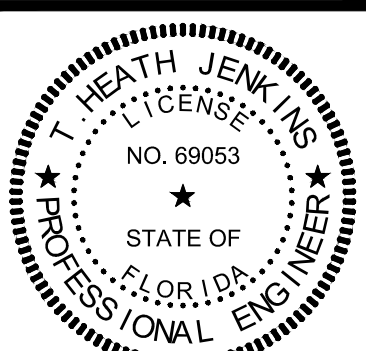
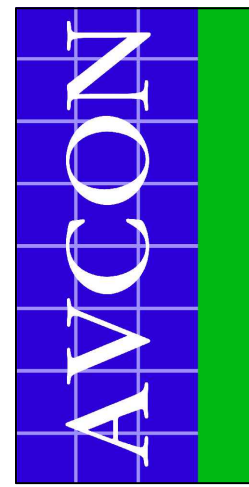


T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF AUTHORIZATION NO. 5057

NO.	DATE	REVISION	BY
1	4-22-25		JLW

THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION, ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC., FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC., ANY DISTRIBUTION, REPRODUCTION, OR OTHER USE OF THIS DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_PLAN AND PROFILE.DWG 4/22/2025 12:38 PM

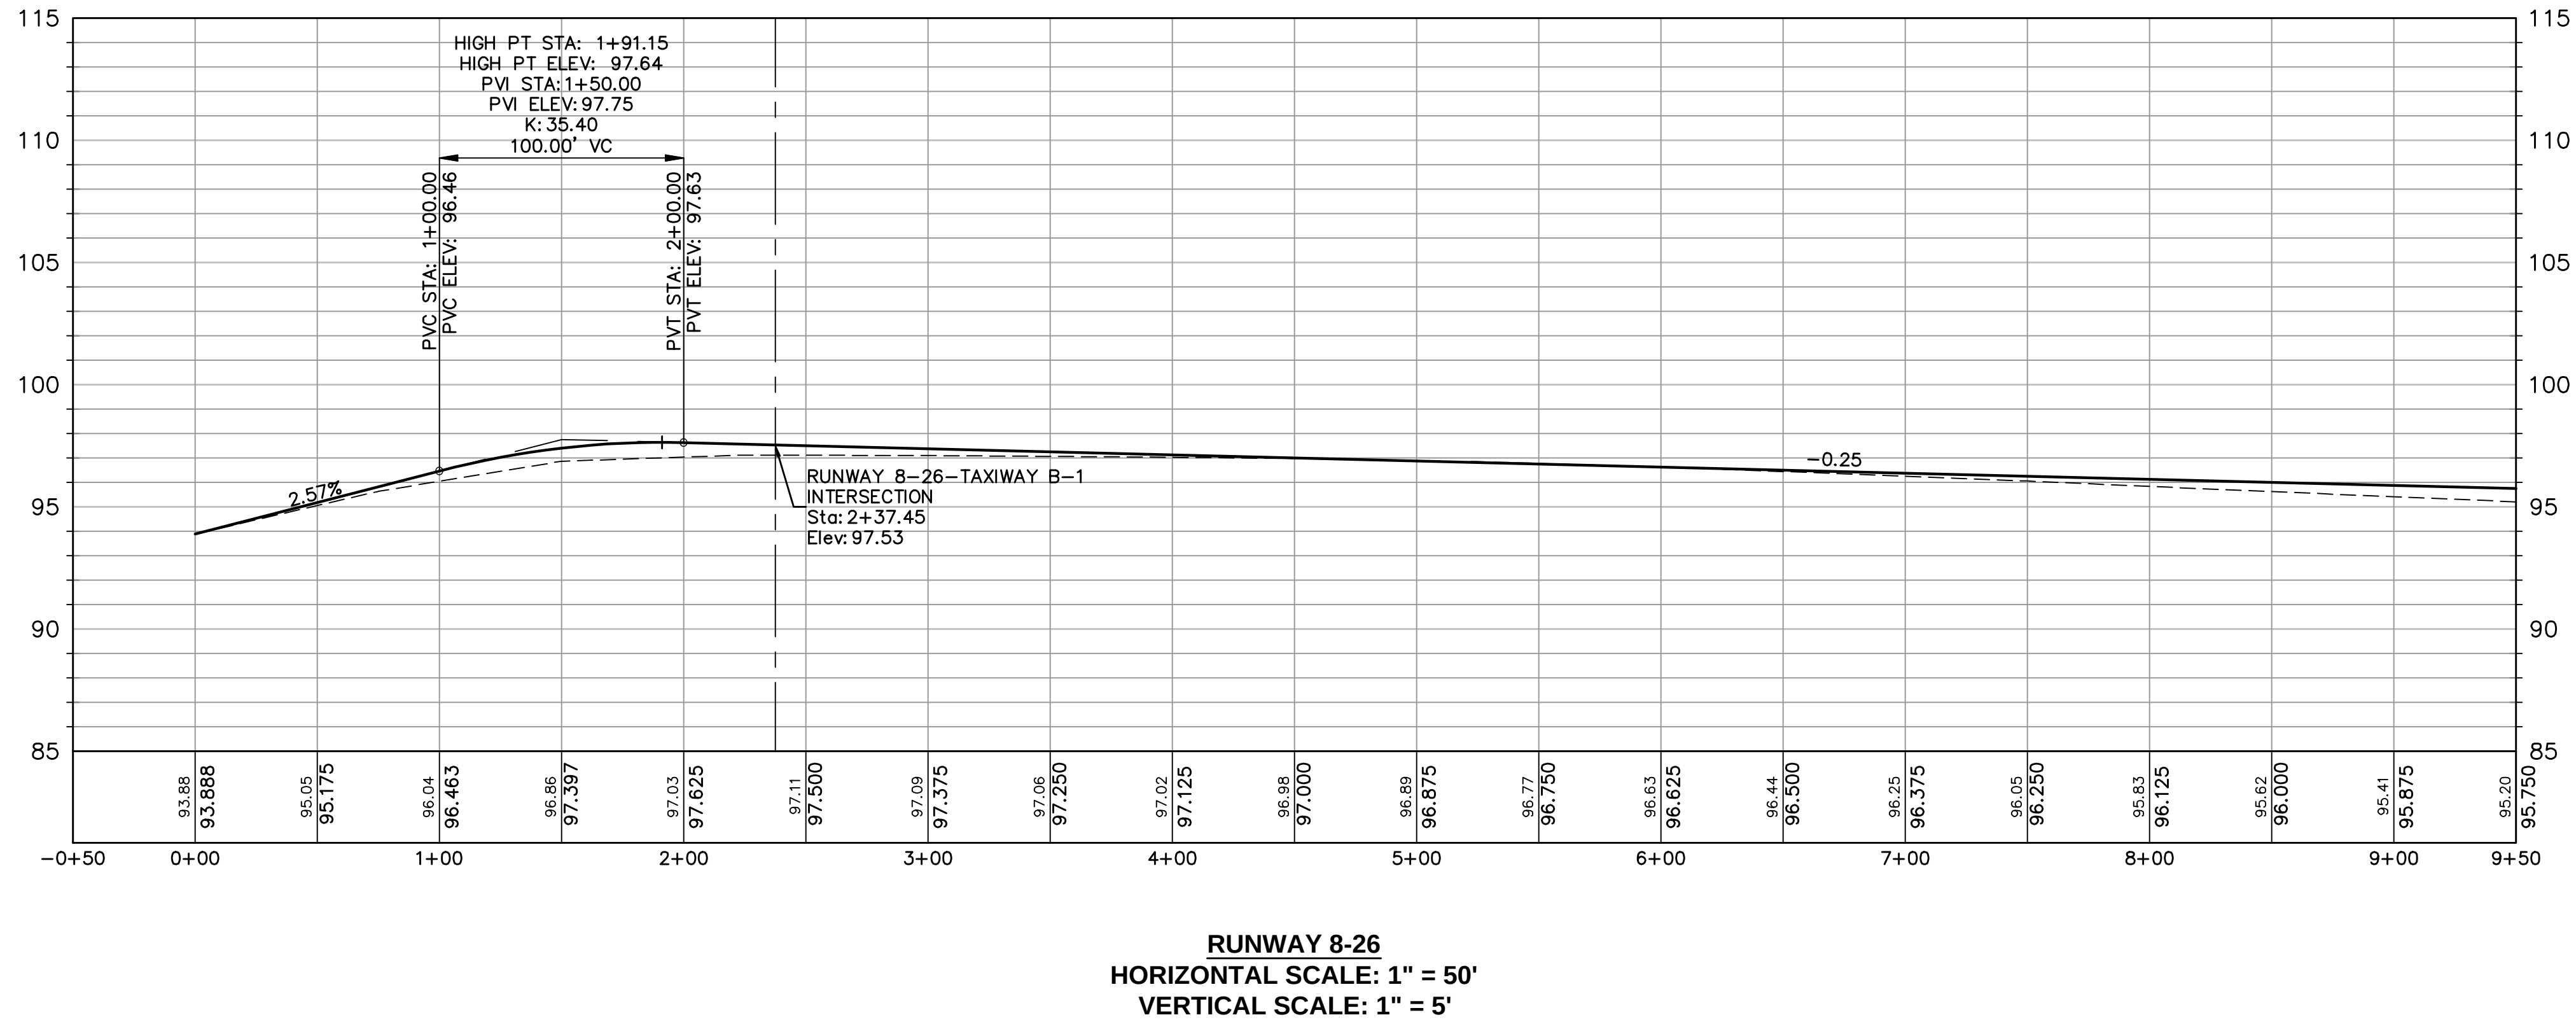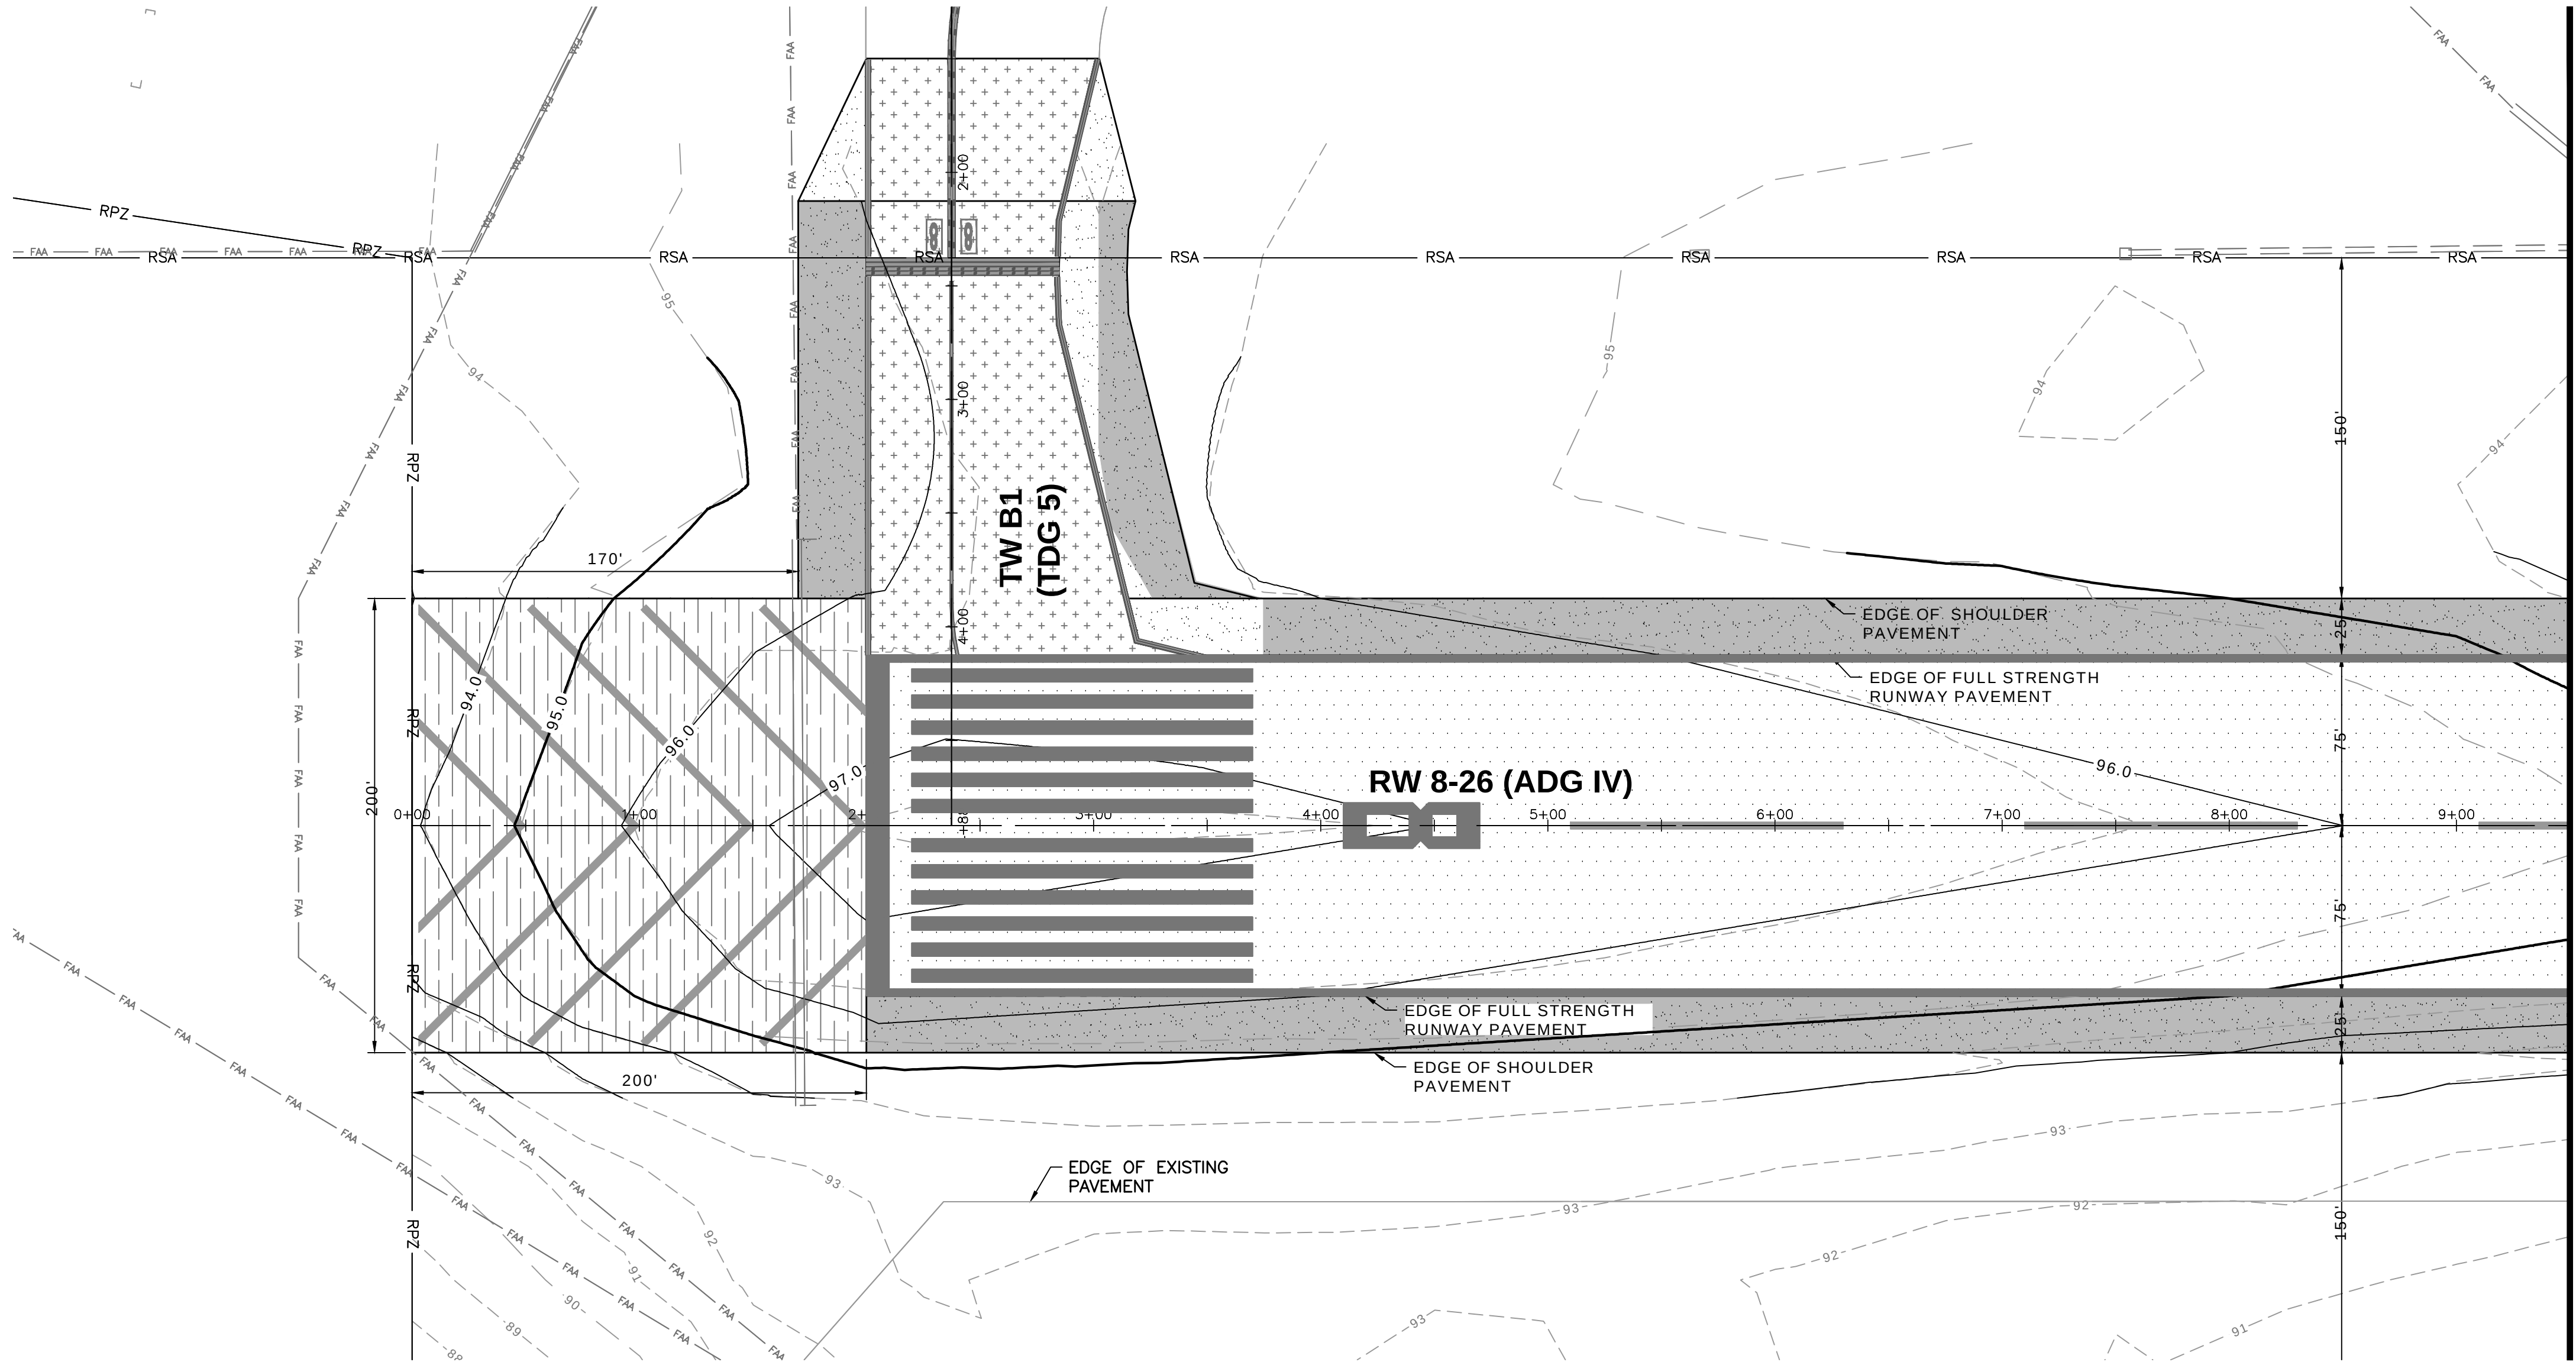



PAVEMENT SECTION NOTES

- SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
- SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS

LEGEND

- EXISTING PAVEMENT
- EXISTING STORM PIPE
- EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DETAIL NUMBER
- DETAIL SHEET NUMBER
- RUNWAY ASPHALT PAVEMENT OVERLAY
- TAXIWAY ASPHALT PAVEMENT OVERLAY
- SHOULDER ASPHALT PAVEMENT OVERLAY
- BLAST PAD ASPHALT PAVEMENT OVERLAY
- NEW TAXIWAY PAVEMENT
- NEW SHOULDER PAVEMENT

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-5526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

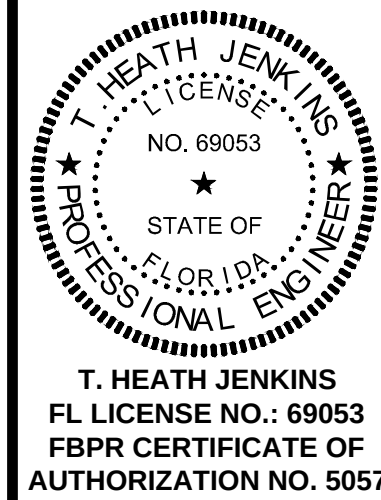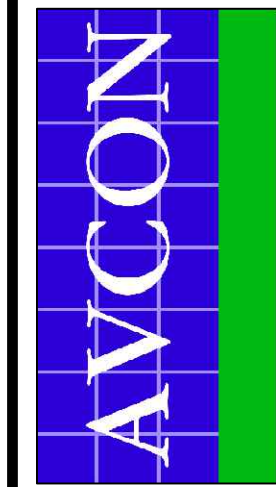

NO.	DATE	BY	REVISION	ADDENDUM #3
1	4-22-25	JLW		



8-26 PLAN AND PROFILE
(SHEET 1 OF 8)
ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
C-8

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_PLAN AND PROFILE.DWG 4/22/2025 12:39 PM

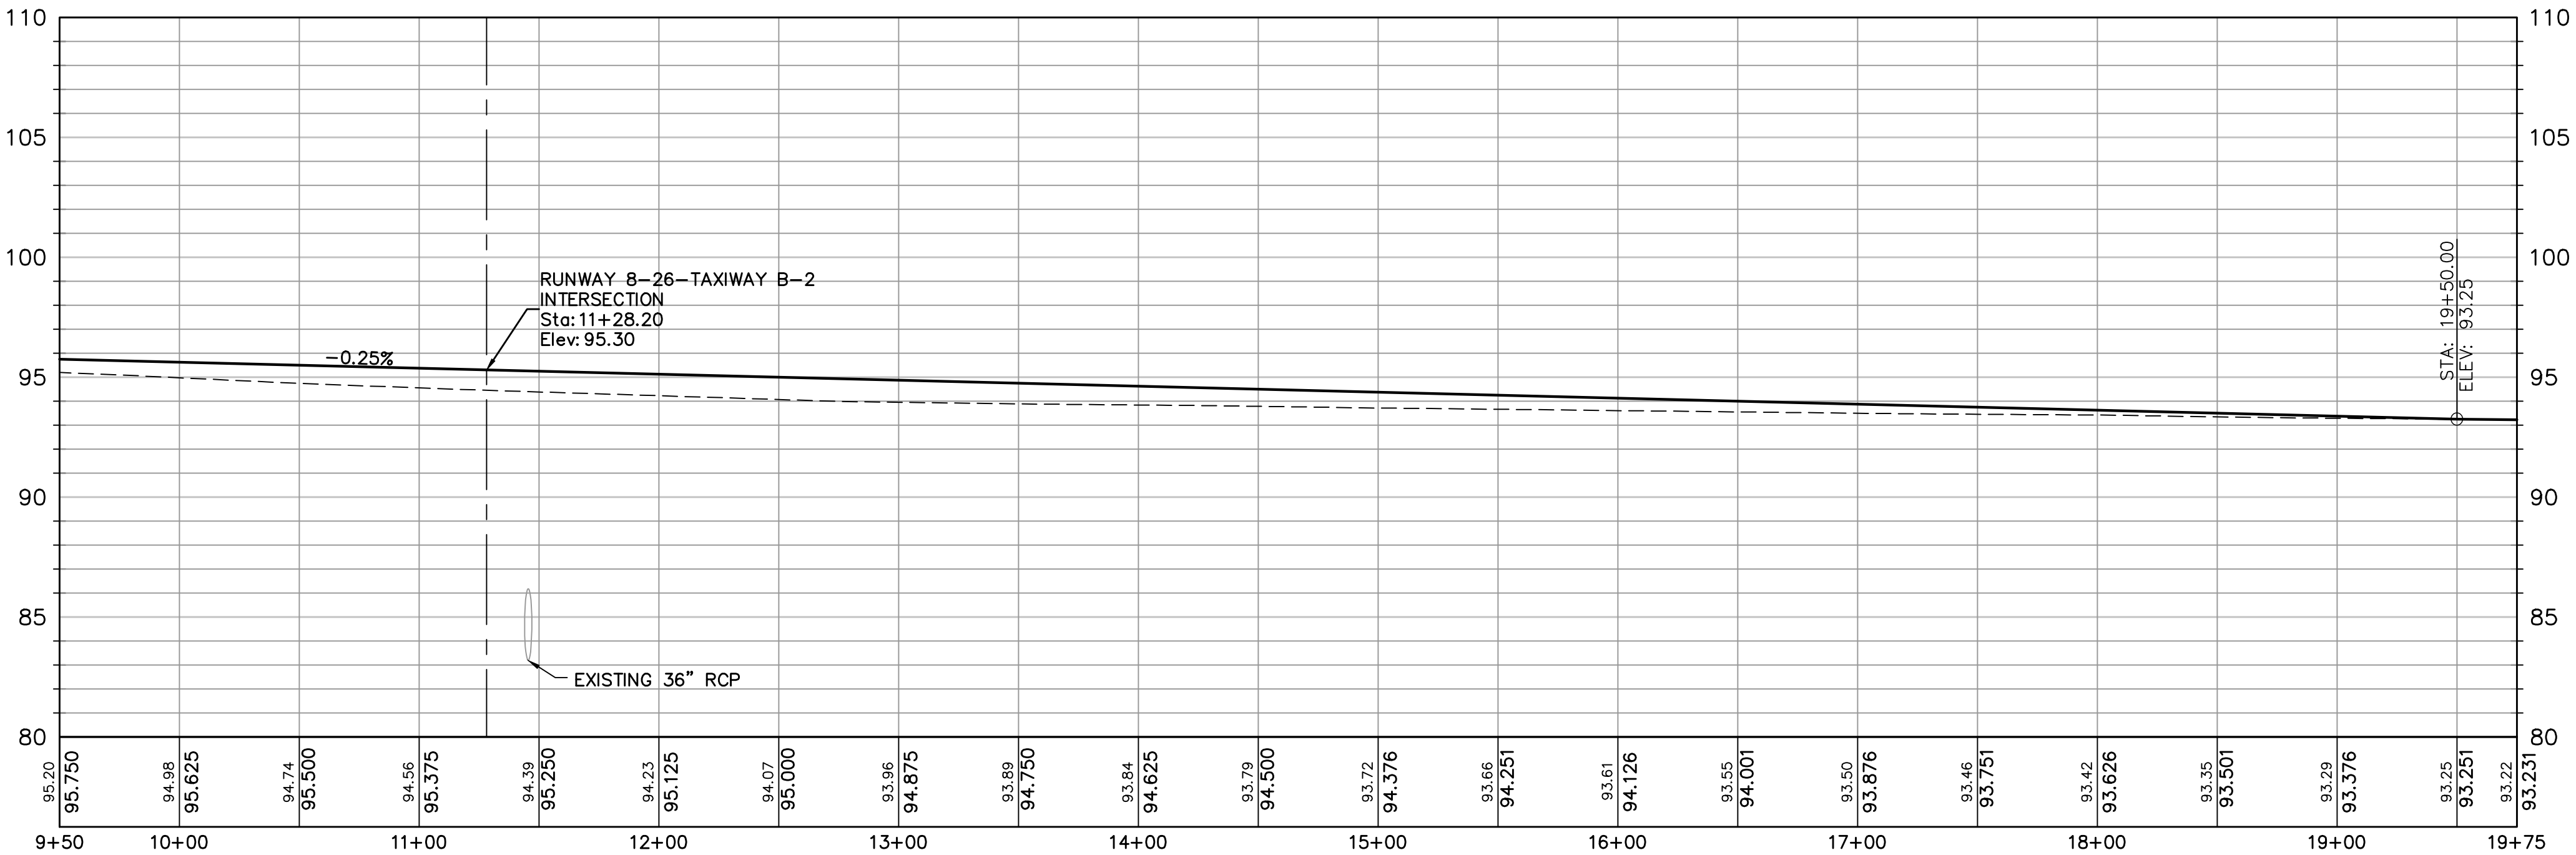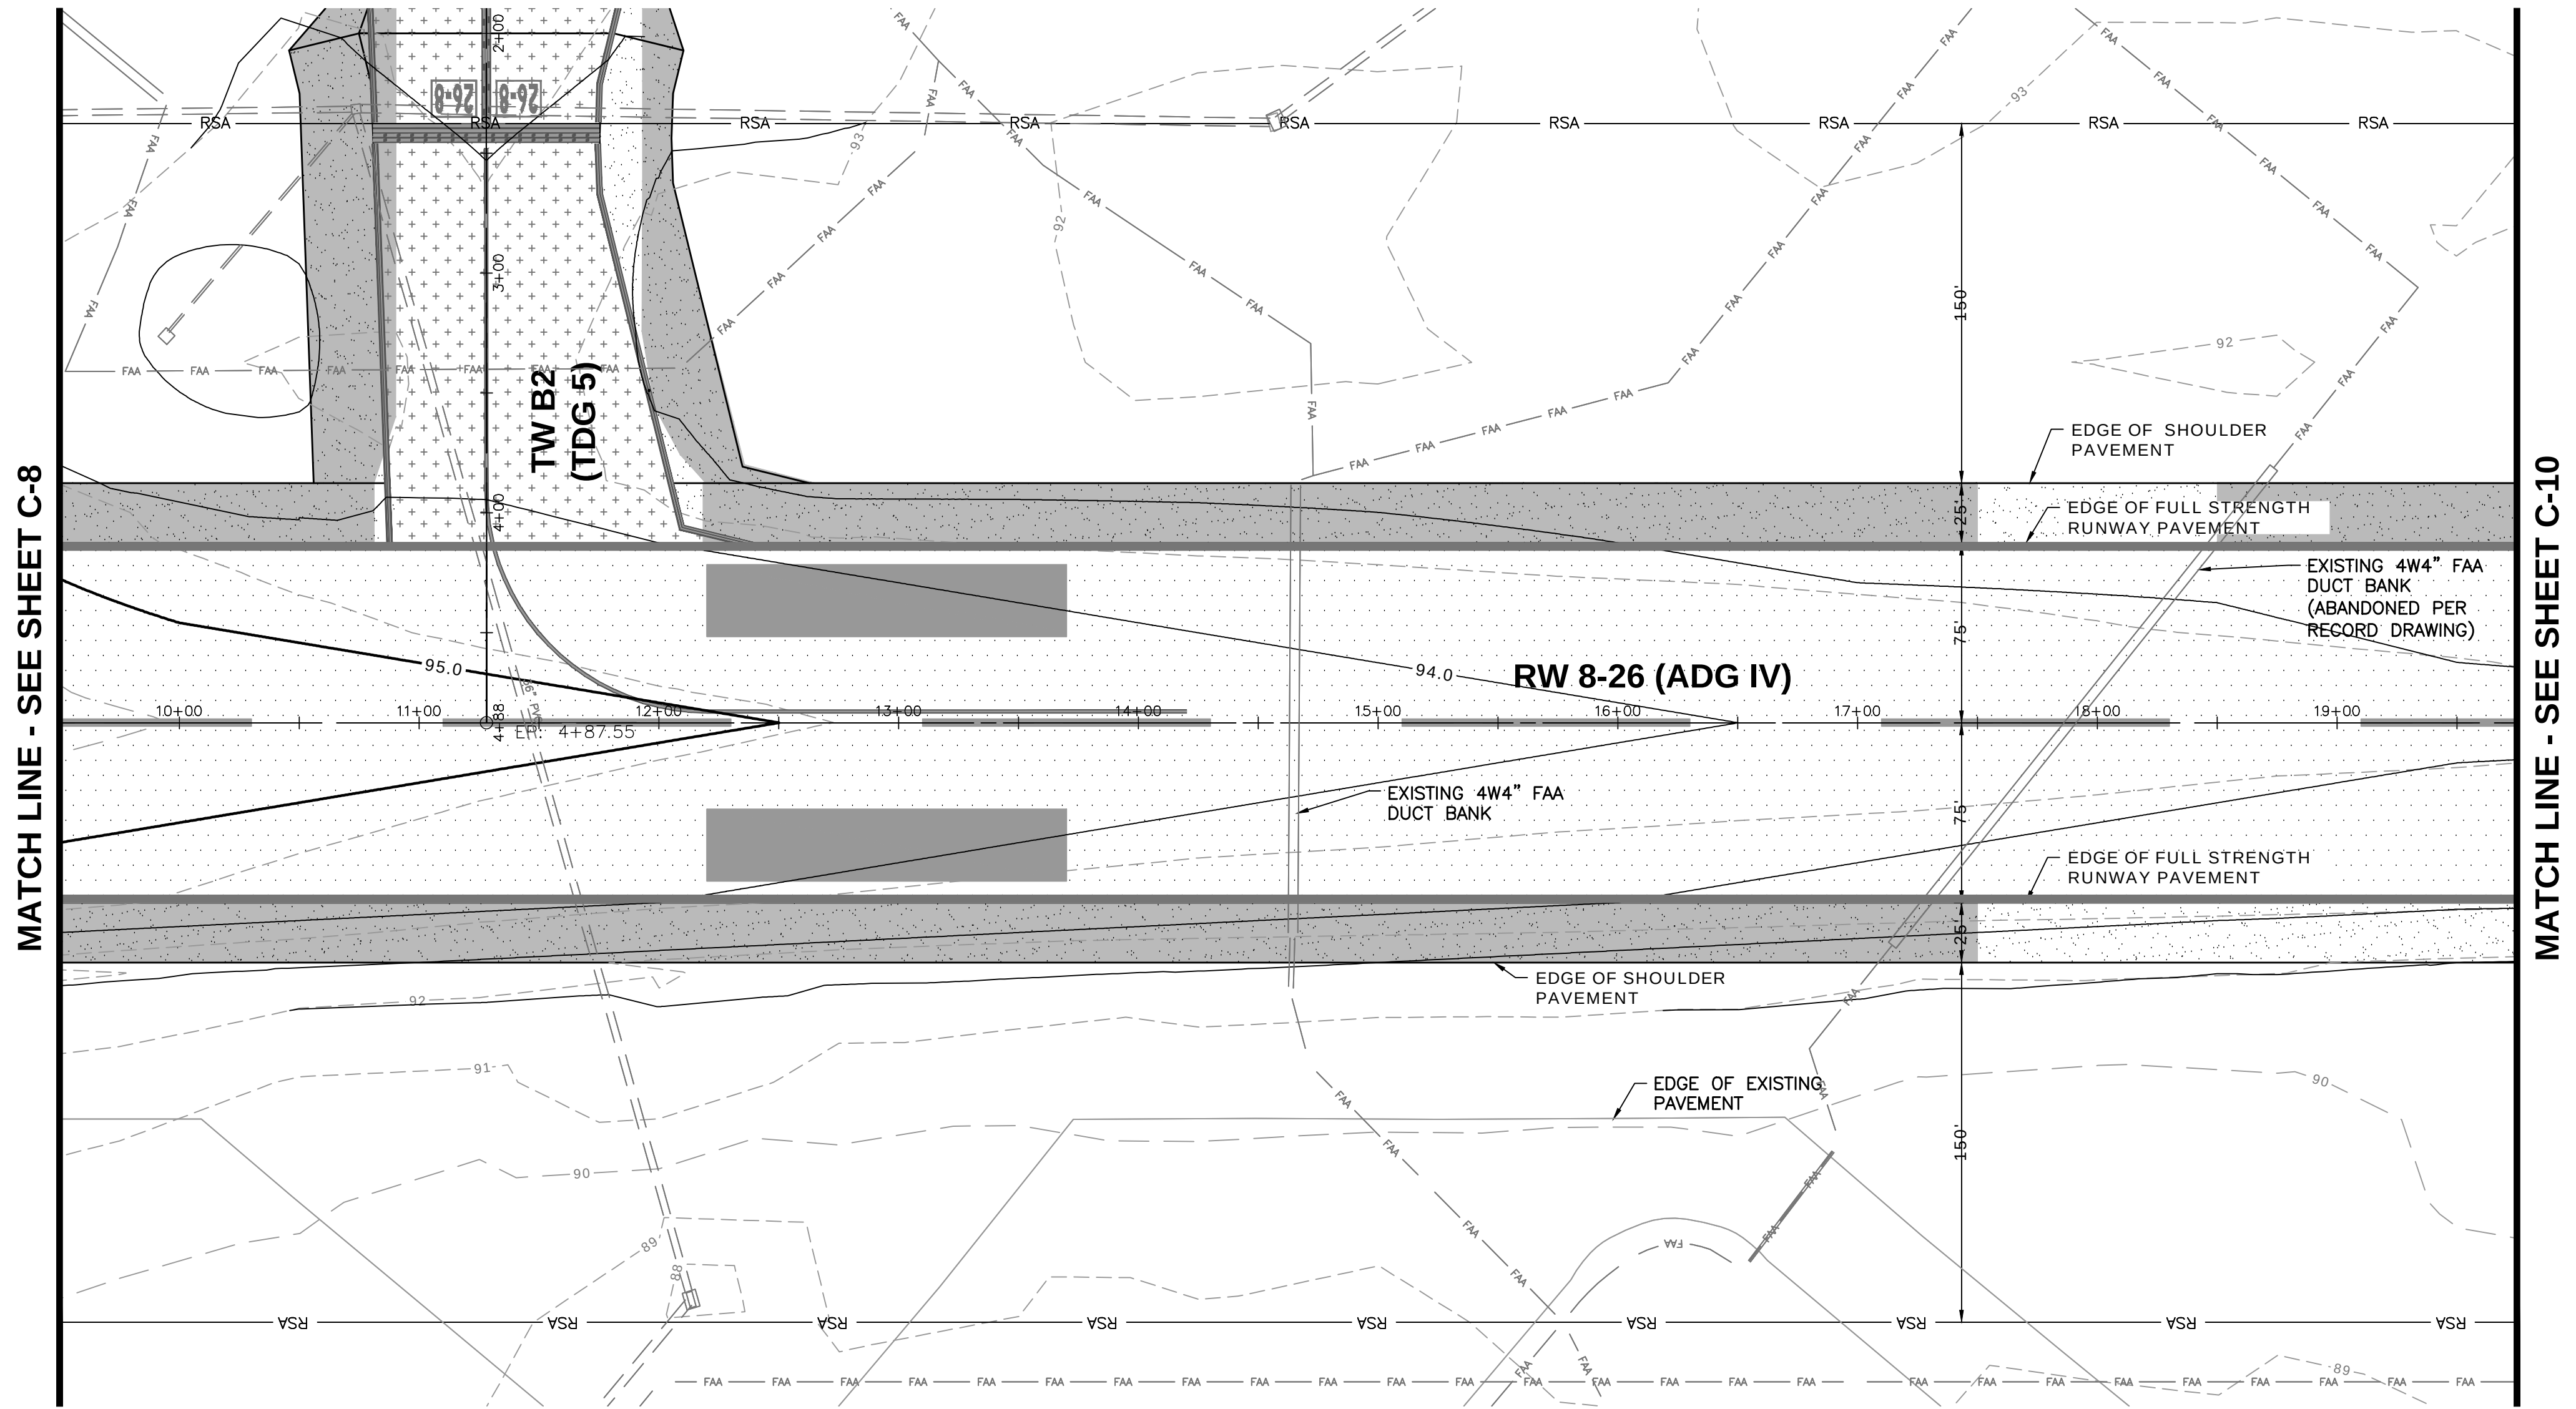

Runway 8-26
Horizontal Scale: 1" = 50'
Vertical Scale: 1" = 5'

PAVEMENT SECTION NOTES

- SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
- SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS

LEGEND


- EXISTING PAVEMENT
- EXISTING STORM PIPE
- EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DETAIL NUMBER
- DETAIL SHEET NUMBER
- Runway Asphalt Pavement Overlay
- Taxiway Asphalt Pavement Overlay
- Shoulder Asphalt Pavement Overlay
- Blast Pad Asphalt Pavement Overlay
- New Taxiway Pavement
- New Shoulder Pavement

North

0 25 50 100

GRAPHIC SCALE IN FEET

1" = 50'

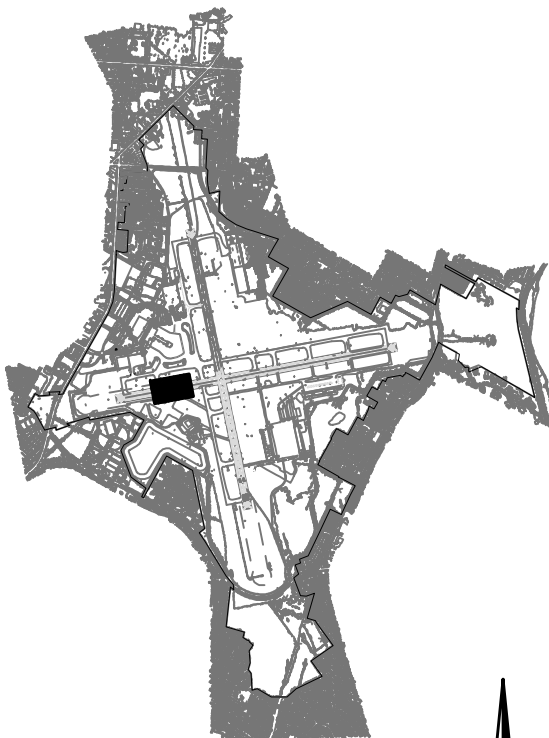


KEYMAP

SCALE: 1" = 5000'

North

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-5526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

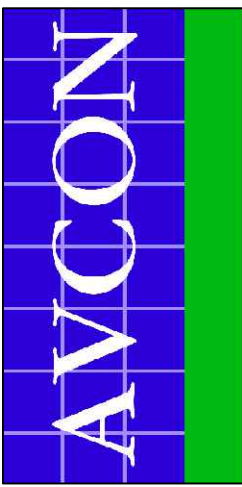

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF AUTHORIZATION NO. 5057

NO.	DATE	BY	REVISION	ADDENDUM #3
1	4-22-25	JLW	REVISION	

8-26 PLAN AND PROFILE
(SHEET 2 OF 8)

ISSUED FOR BID DRAWINGS

Runway 8-26
REHABILITATION



PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

C-9

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_PLAN AND PROFILE.DWG 4/22/2025 12:40 PM

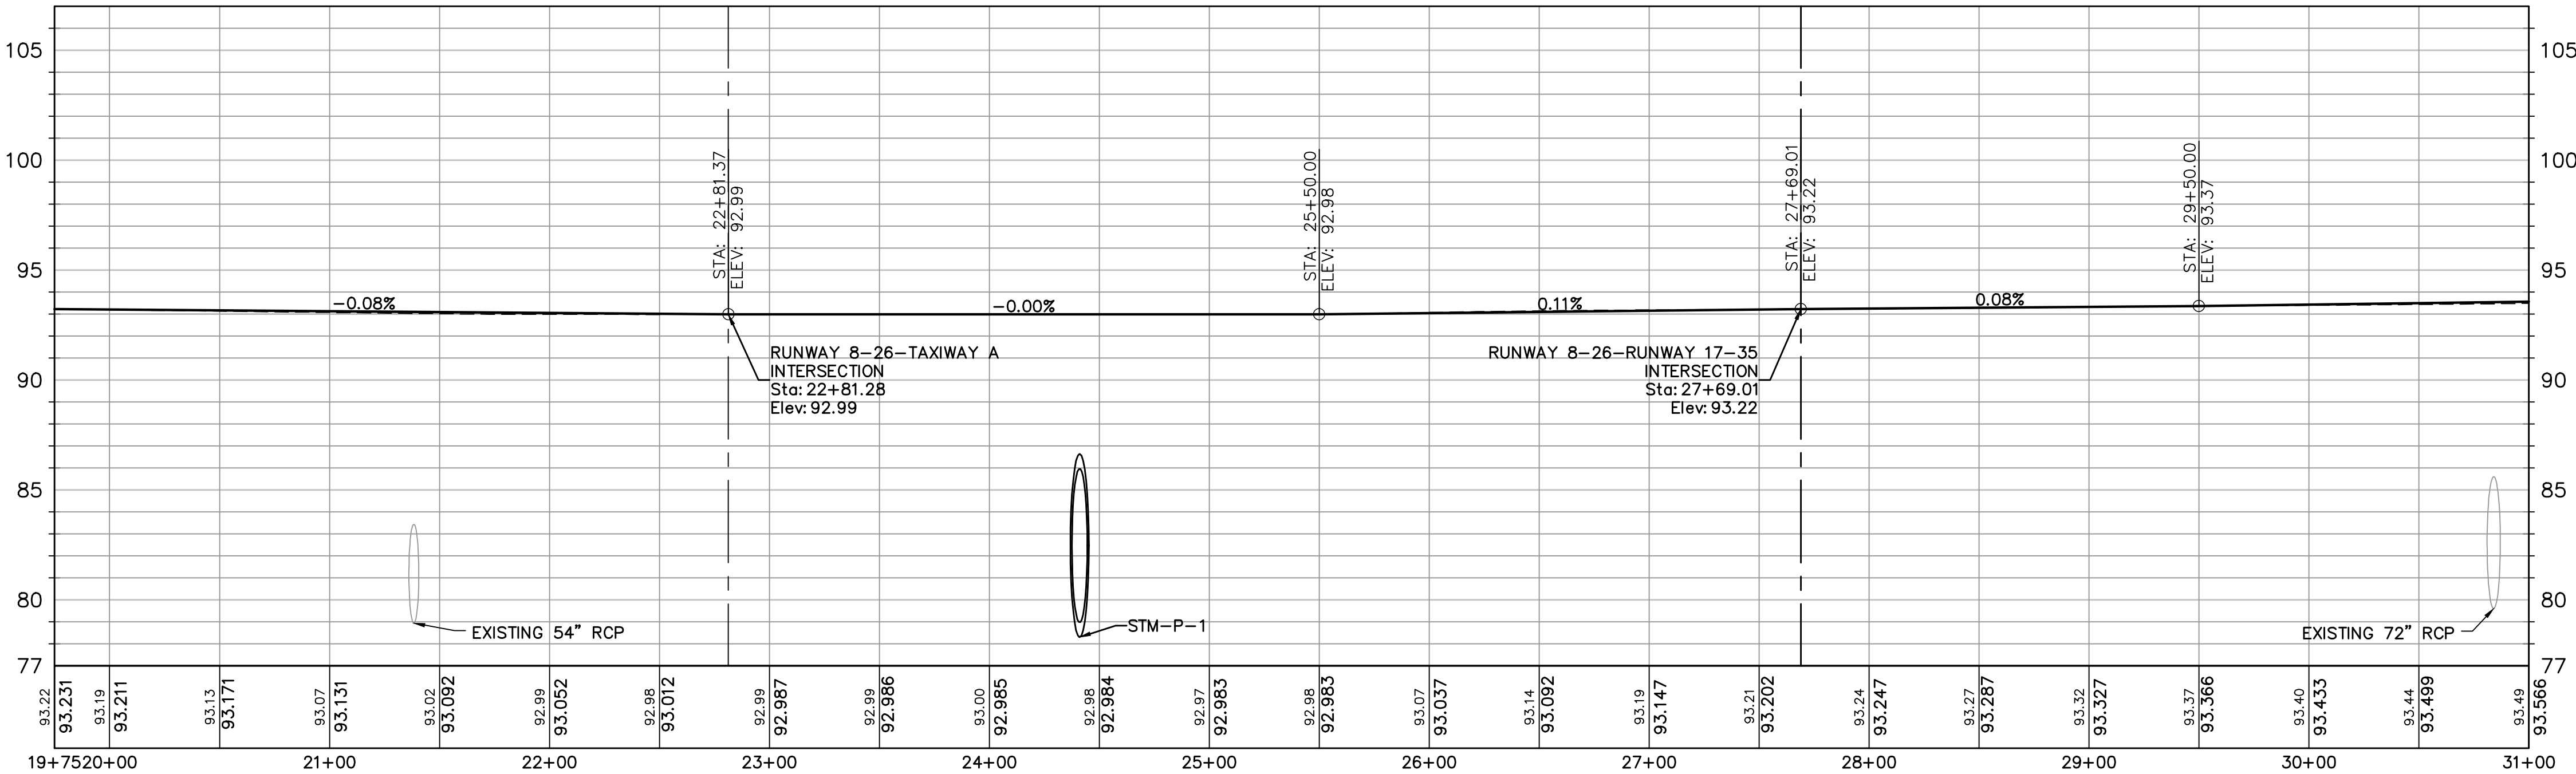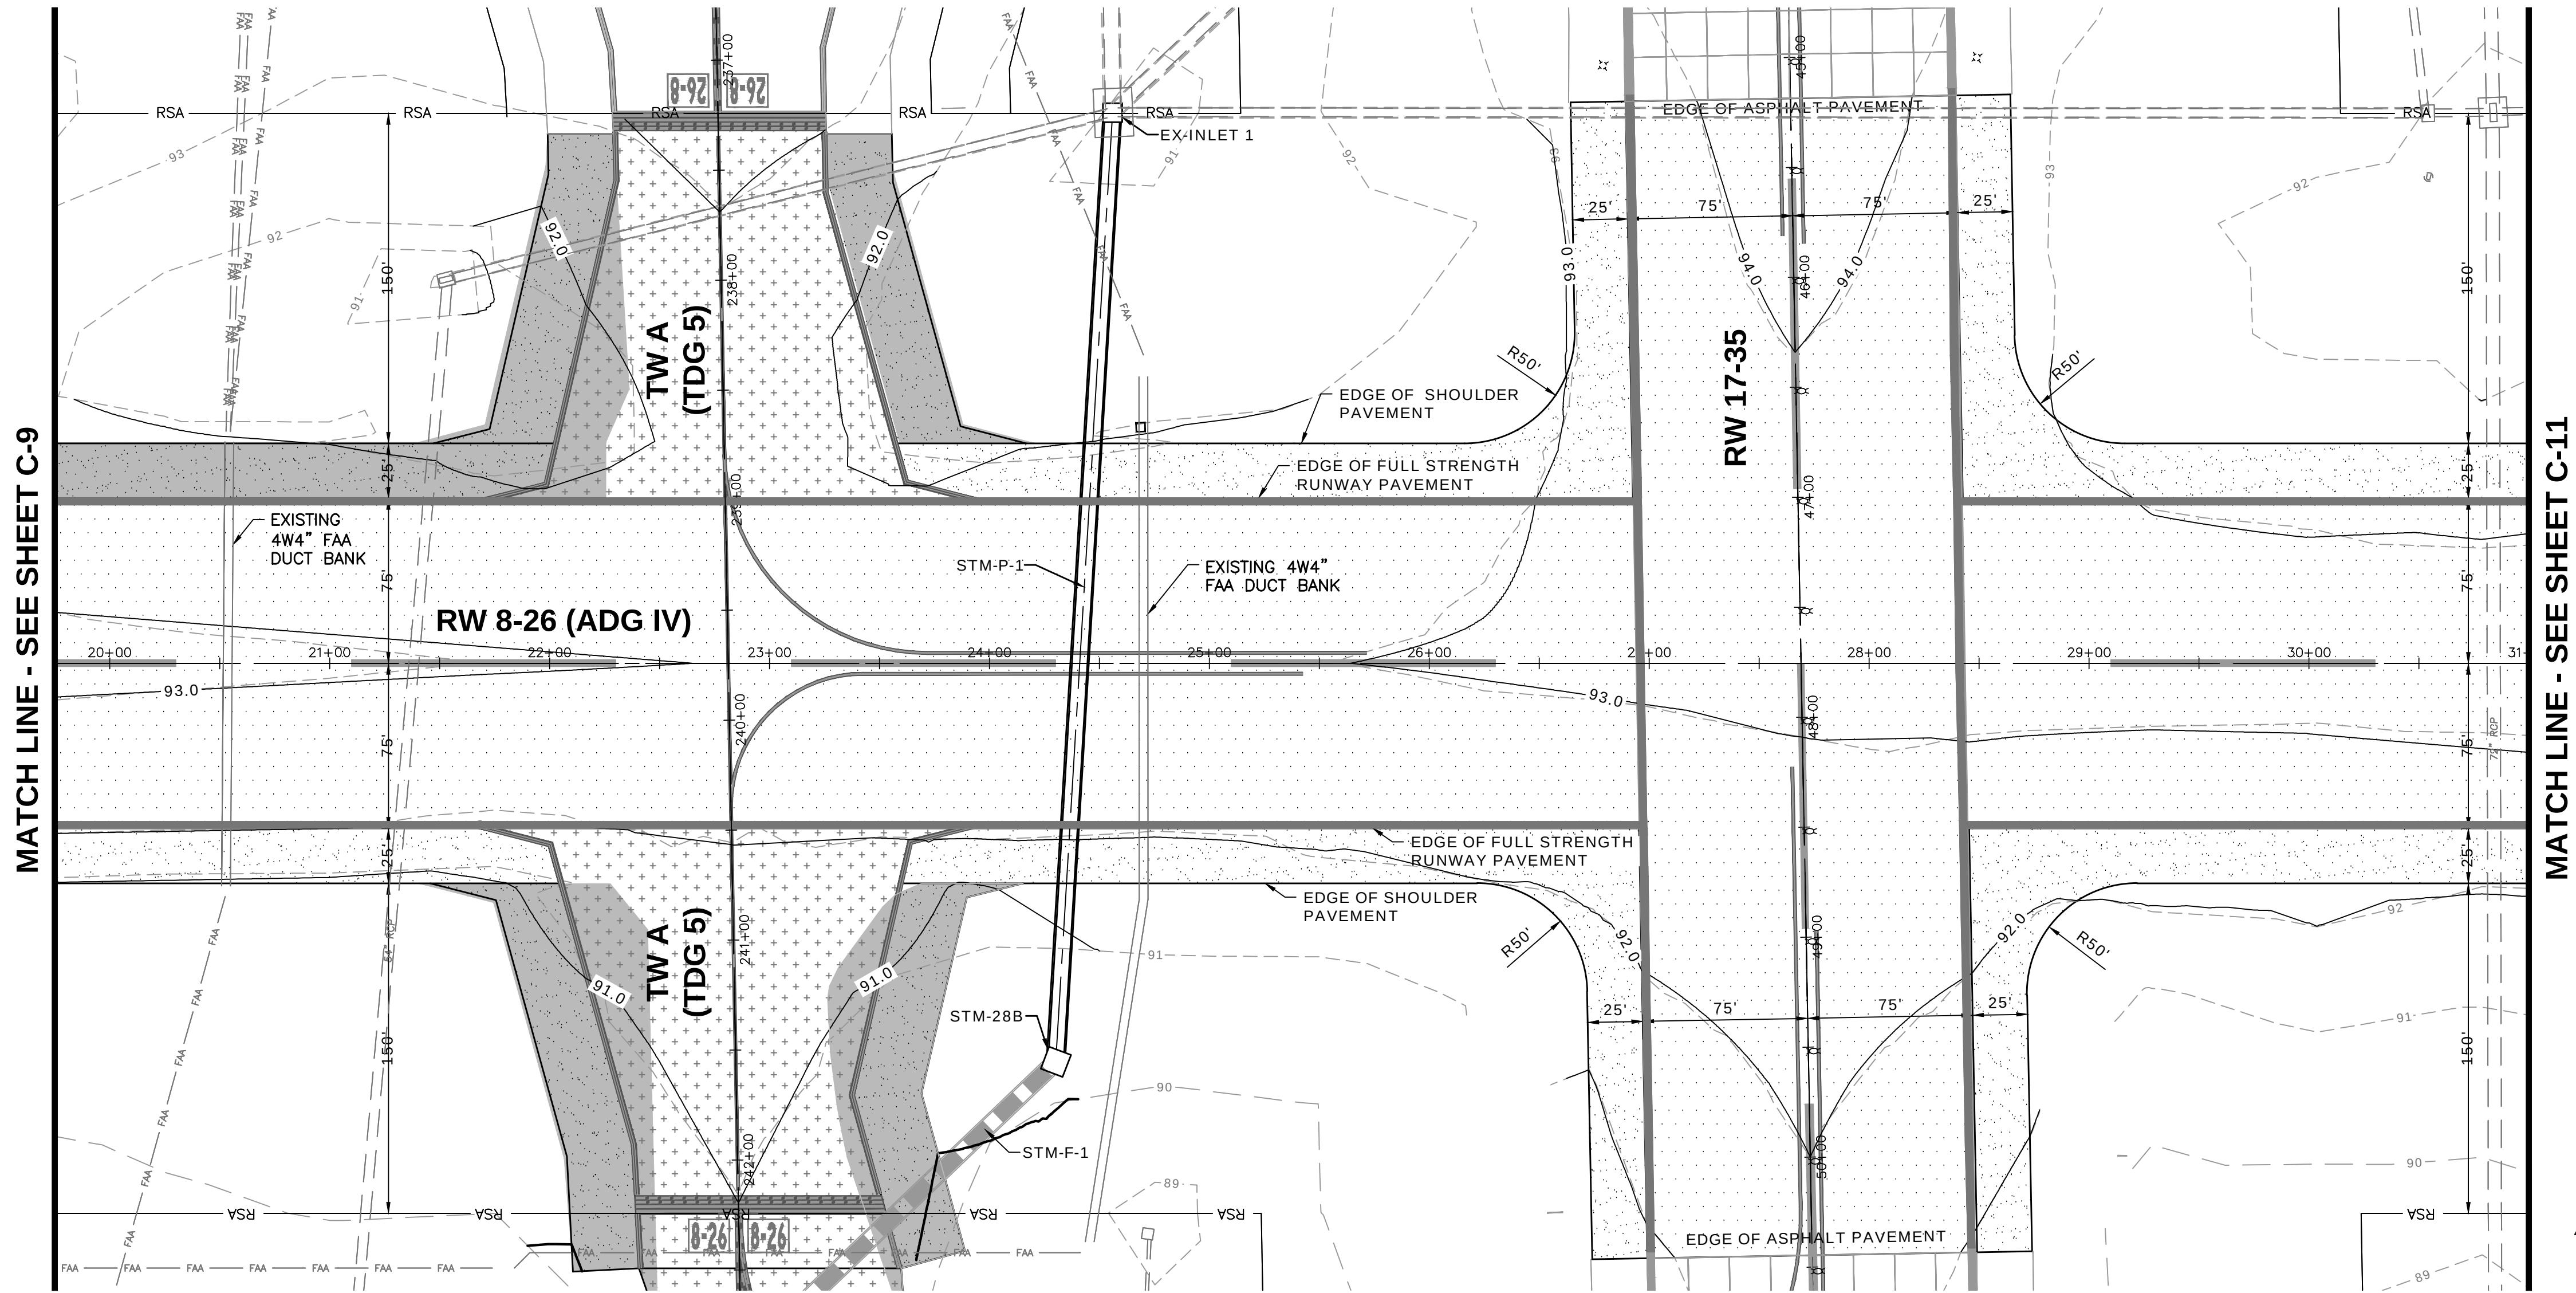

RUNWAY 8-26
HORIZONTAL SCALE: 1" = 50'
VERTICAL SCALE: 1" = 5'


PAVEMENT SECTION NOTES

- SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
- SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS

LEGEND

- EXISTING PAVEMENT
- EXISTING STORM PIPE
- EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DETAIL NUMBER
- DETAIL SHEET NUMBER
- RUNWAY ASPHALT PAVEMENT OVERLAY
- TAXIWAY ASPHALT PAVEMENT OVERLAY
- SHOULDER ASPHALT PAVEMENT OVERLAY
- BLAST PAD ASPHALT PAVEMENT OVERLAY
- NEW TAXIWAY PAVEMENT
- NEW SHOULDER PAVEMENT

North
0 25 50 100
GRAPHIC SCALE IN FEET
1" = 50'

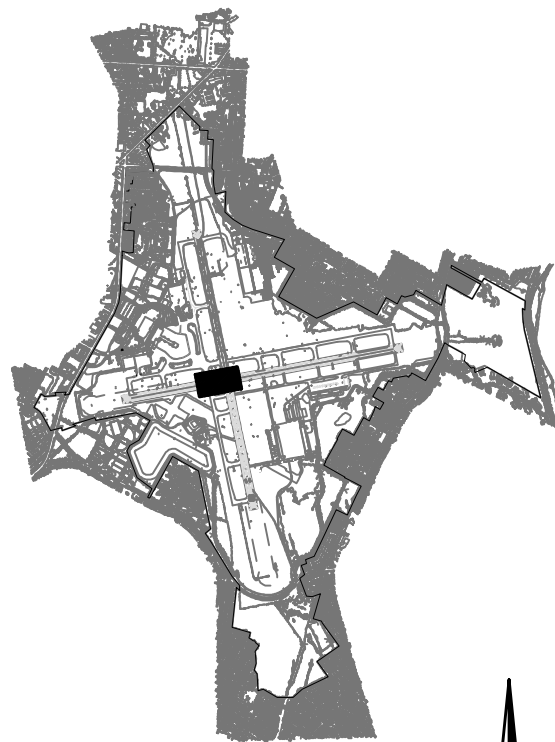

KEYMAP
SCALE: 1" = 5000'
North

8-26 PLAN AND PROFILE
(SHEET 3 OF 8)

ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION

PREPARED FOR


PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JMW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

C-10


AVCON, INC.
ENGINEERS & PLANNERS
3208 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-5526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

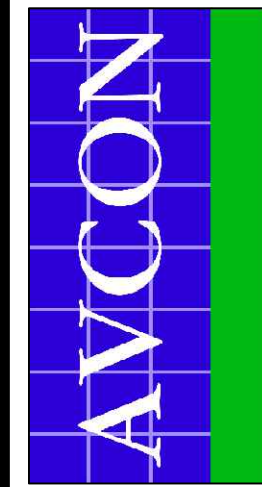

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF AUTHORIZATION NO. 5057

NO.	DATE	BY	REVISION	ADDENDUM #3
1	4-22-25	JMW	REVISION	



THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION, ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC., FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC., ANY DISTRIBUTION, REPRODUCTION, OR OTHER USE OF THIS DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.


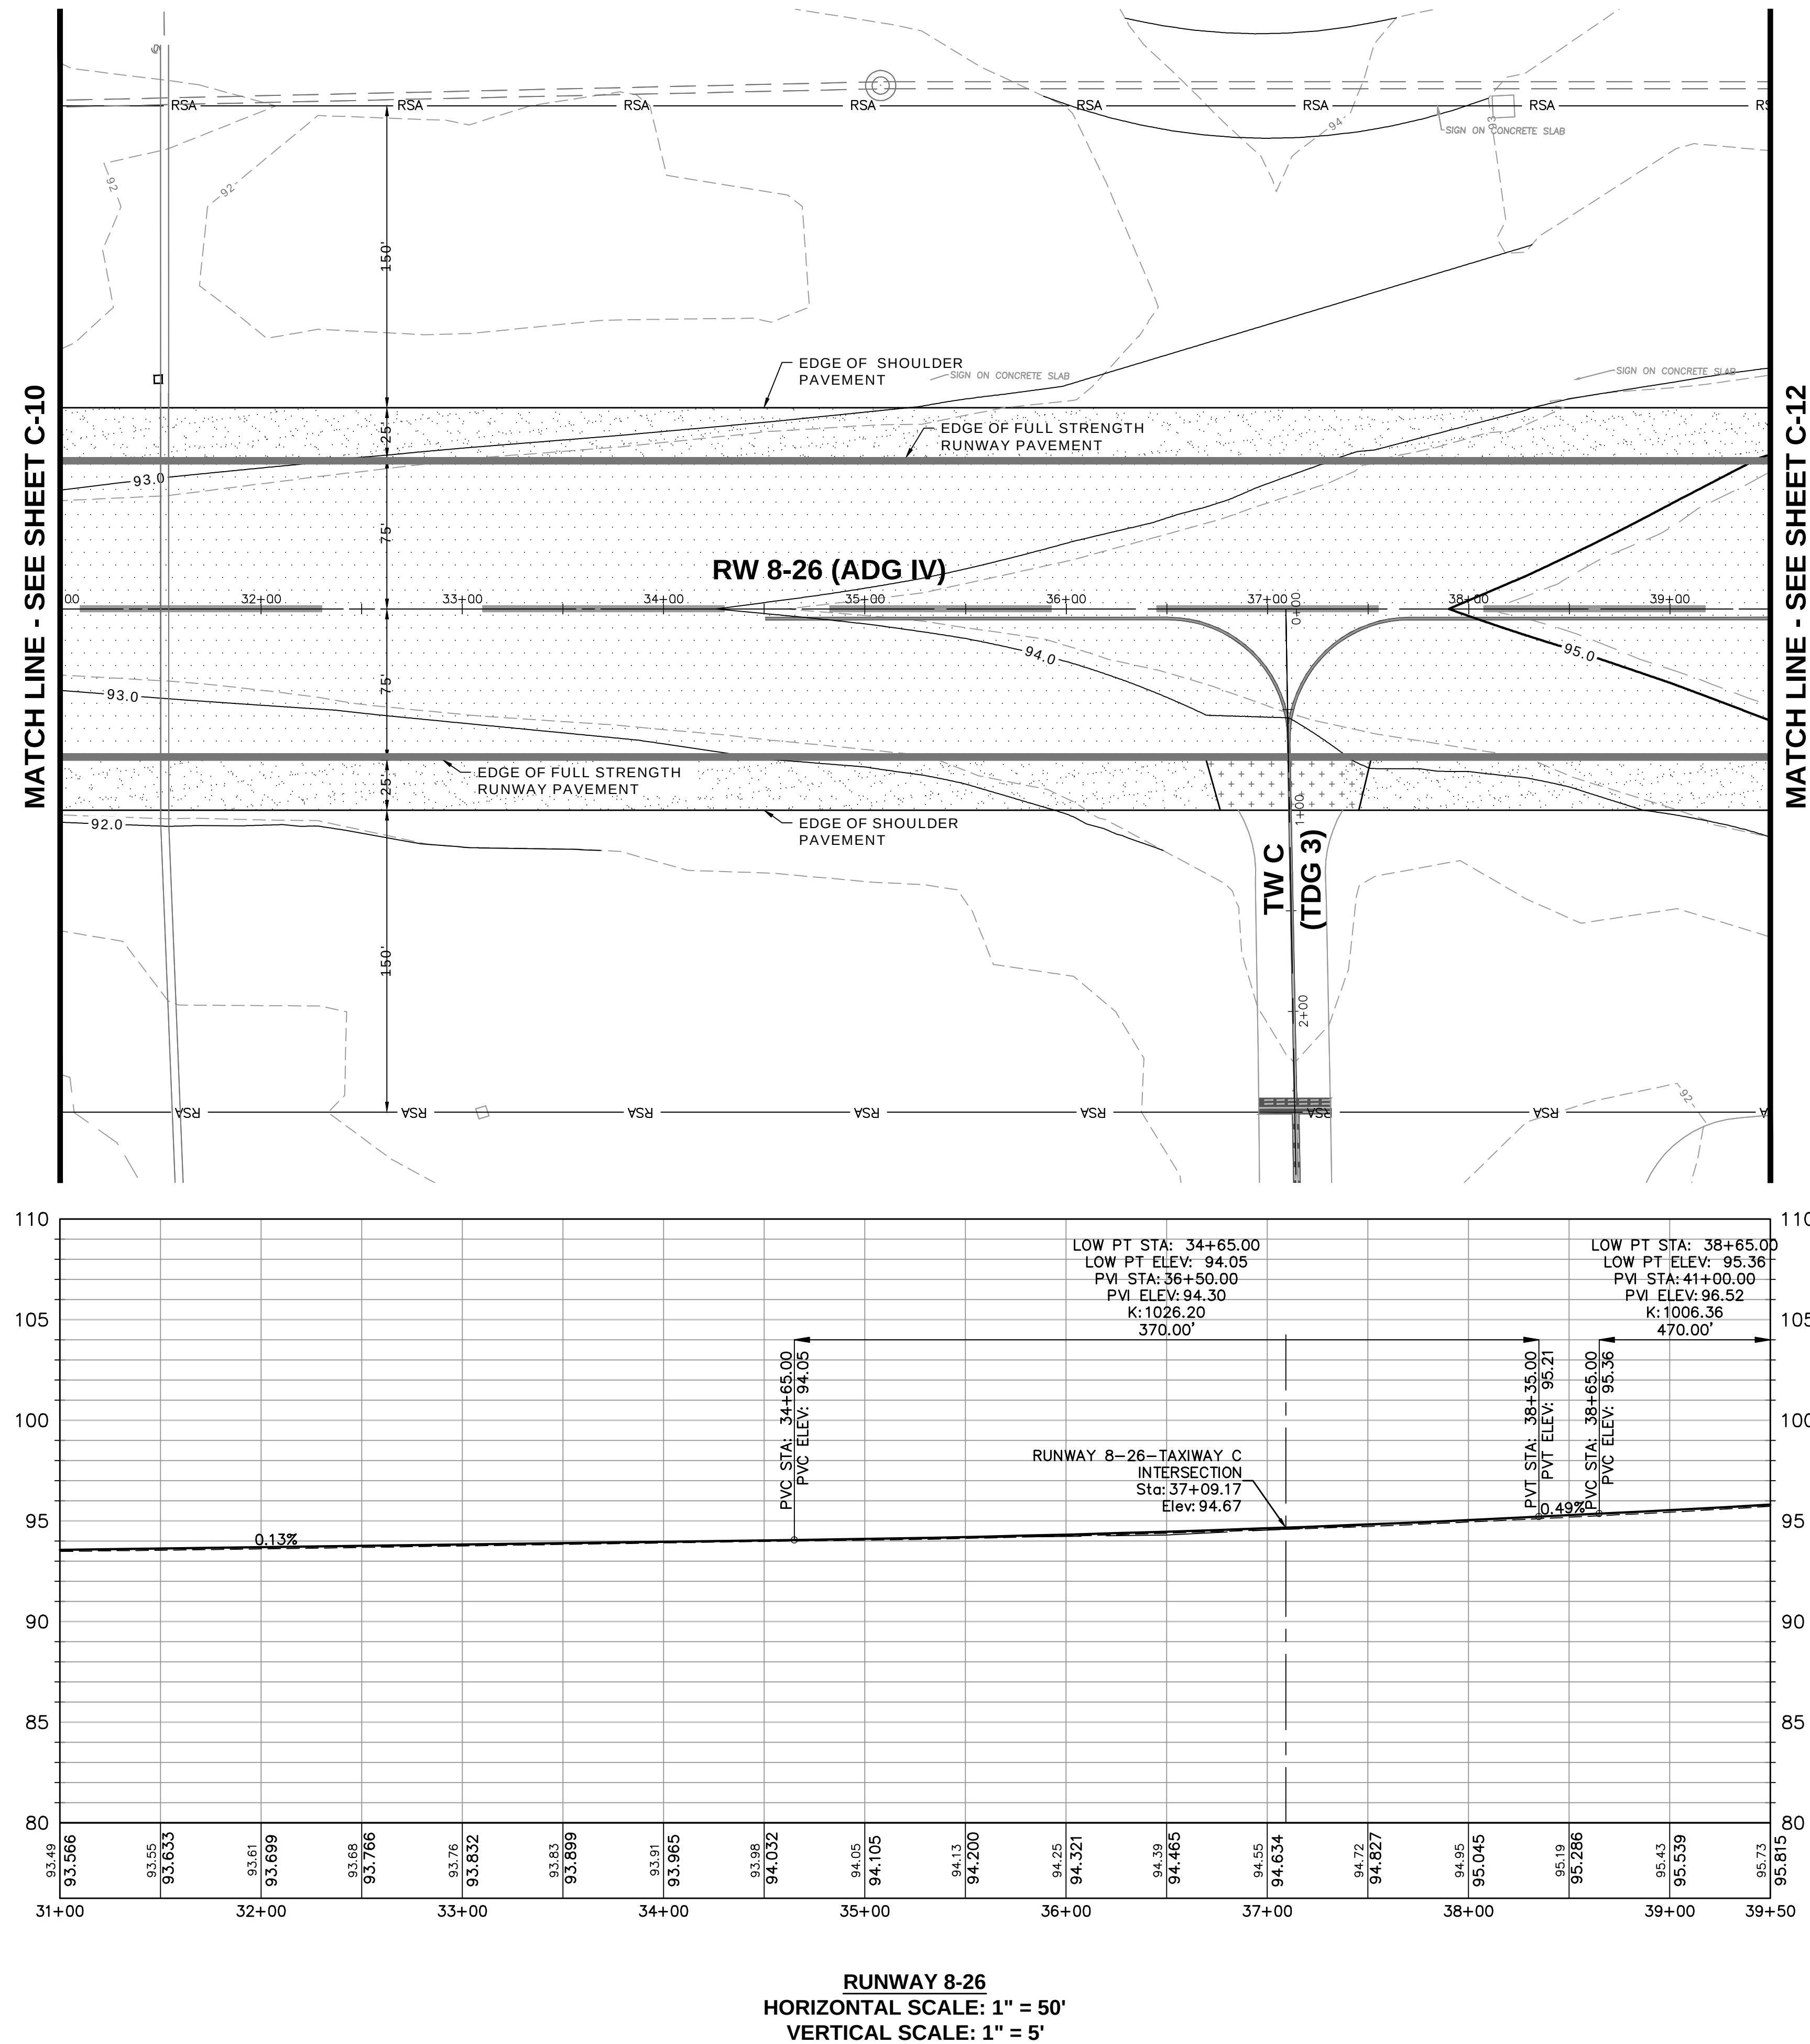


PAVEMENT SECTION NOTES

1. SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
2. SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS


LEGEND

	EXISTING PAVEMENT
== == == ==	EXISTING STORM PIPE
— FAA —	EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- - -14- - -	EXISTING CONTOUR
— 15.0 —	PROPOSED CONTOUR
	DETAIL NUMBER DETAIL SHEET NUMBER
	RUNWAY ASPHALT PAVEMENT OVERLAY
	TAXIWAY ASPHALT PAVEMENT OVERLAY
	SHOULDER ASPHALT PAVEMENT OVERLAY
	BLAST PAD ASPHALT PAVEMENT OVERLAY
	NEW TAXIWAY PAVEMENT
	NEW SHOULDER PAVEMENT

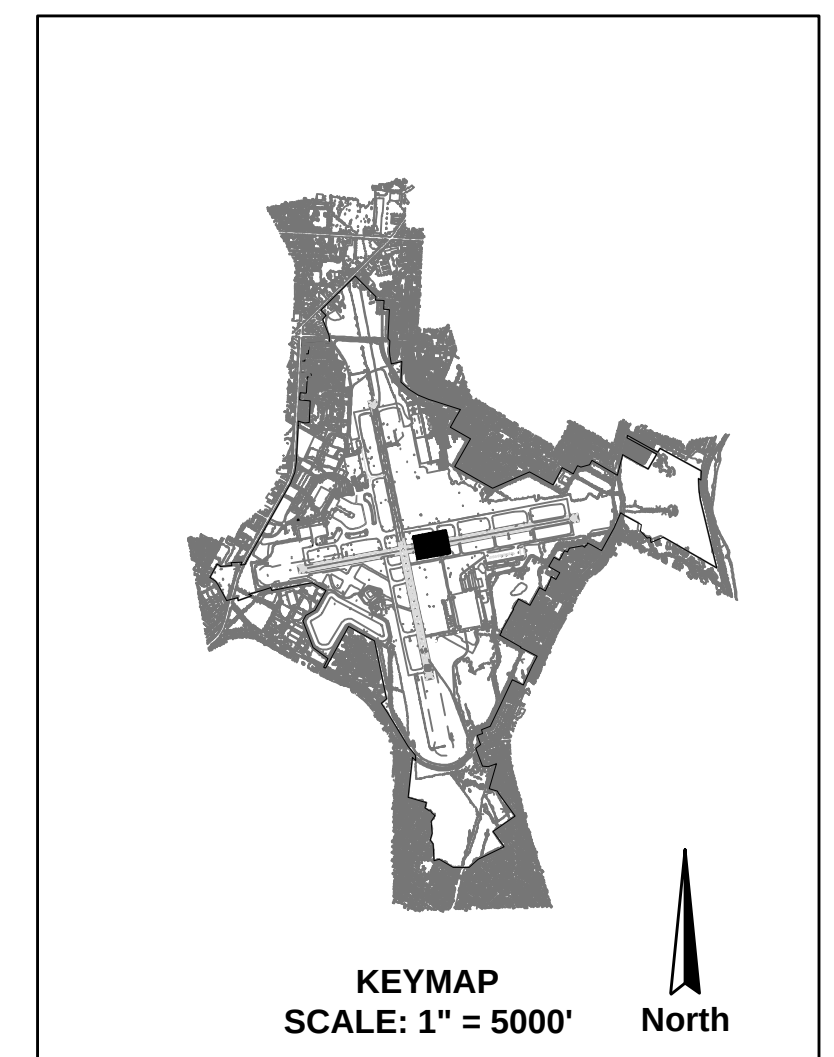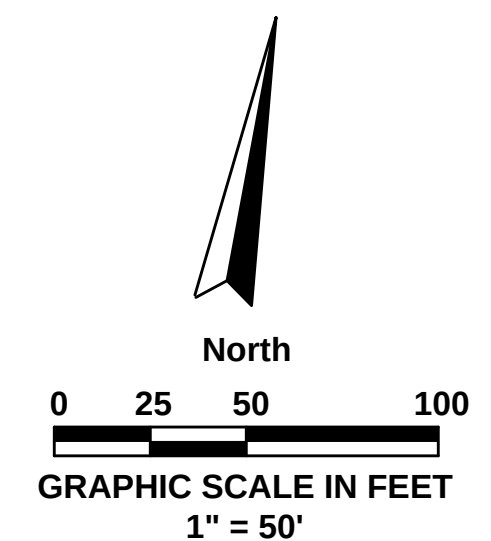


AVCON, INC.
ENGINEERS & PLANNERS

3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 698-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
www.avconinc.com

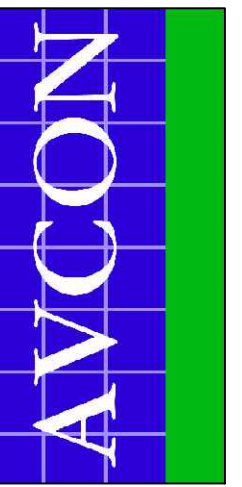

**TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY**

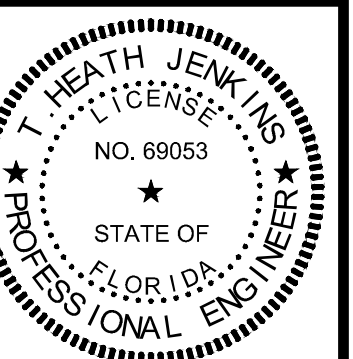

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF
AUTHORIZATION NO. 5057

[illegible]

**8-26 PLAN AND
PROFILE
(SHEET 4 OF 8)**

ISSUED FOR BID DRAWINGS

REHABILITATION



PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

C-11

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_PLAN AND PROFILE.DWG 4/22/2025 12:42 PM

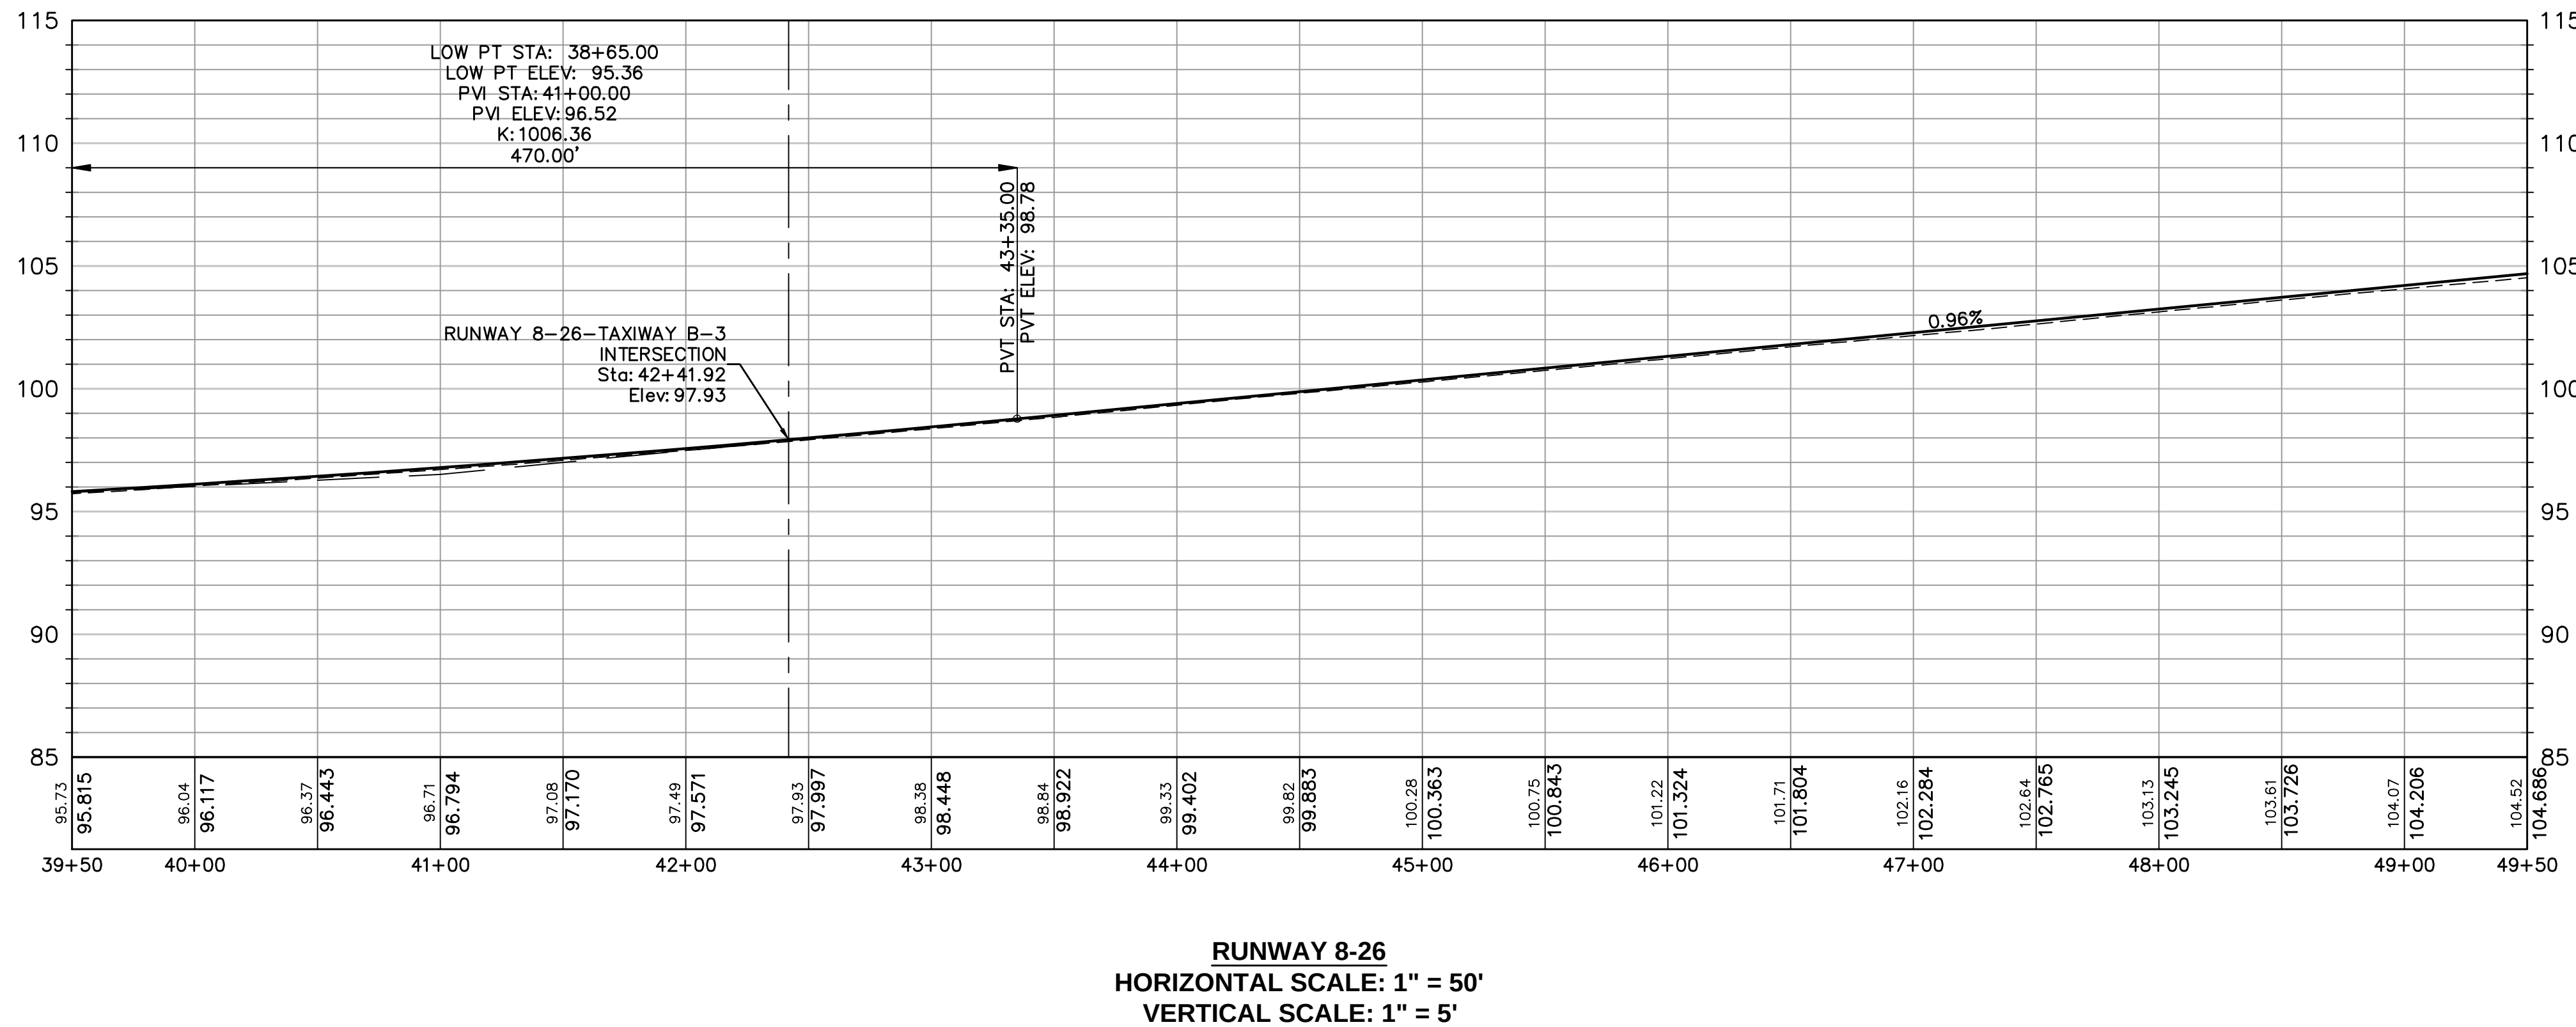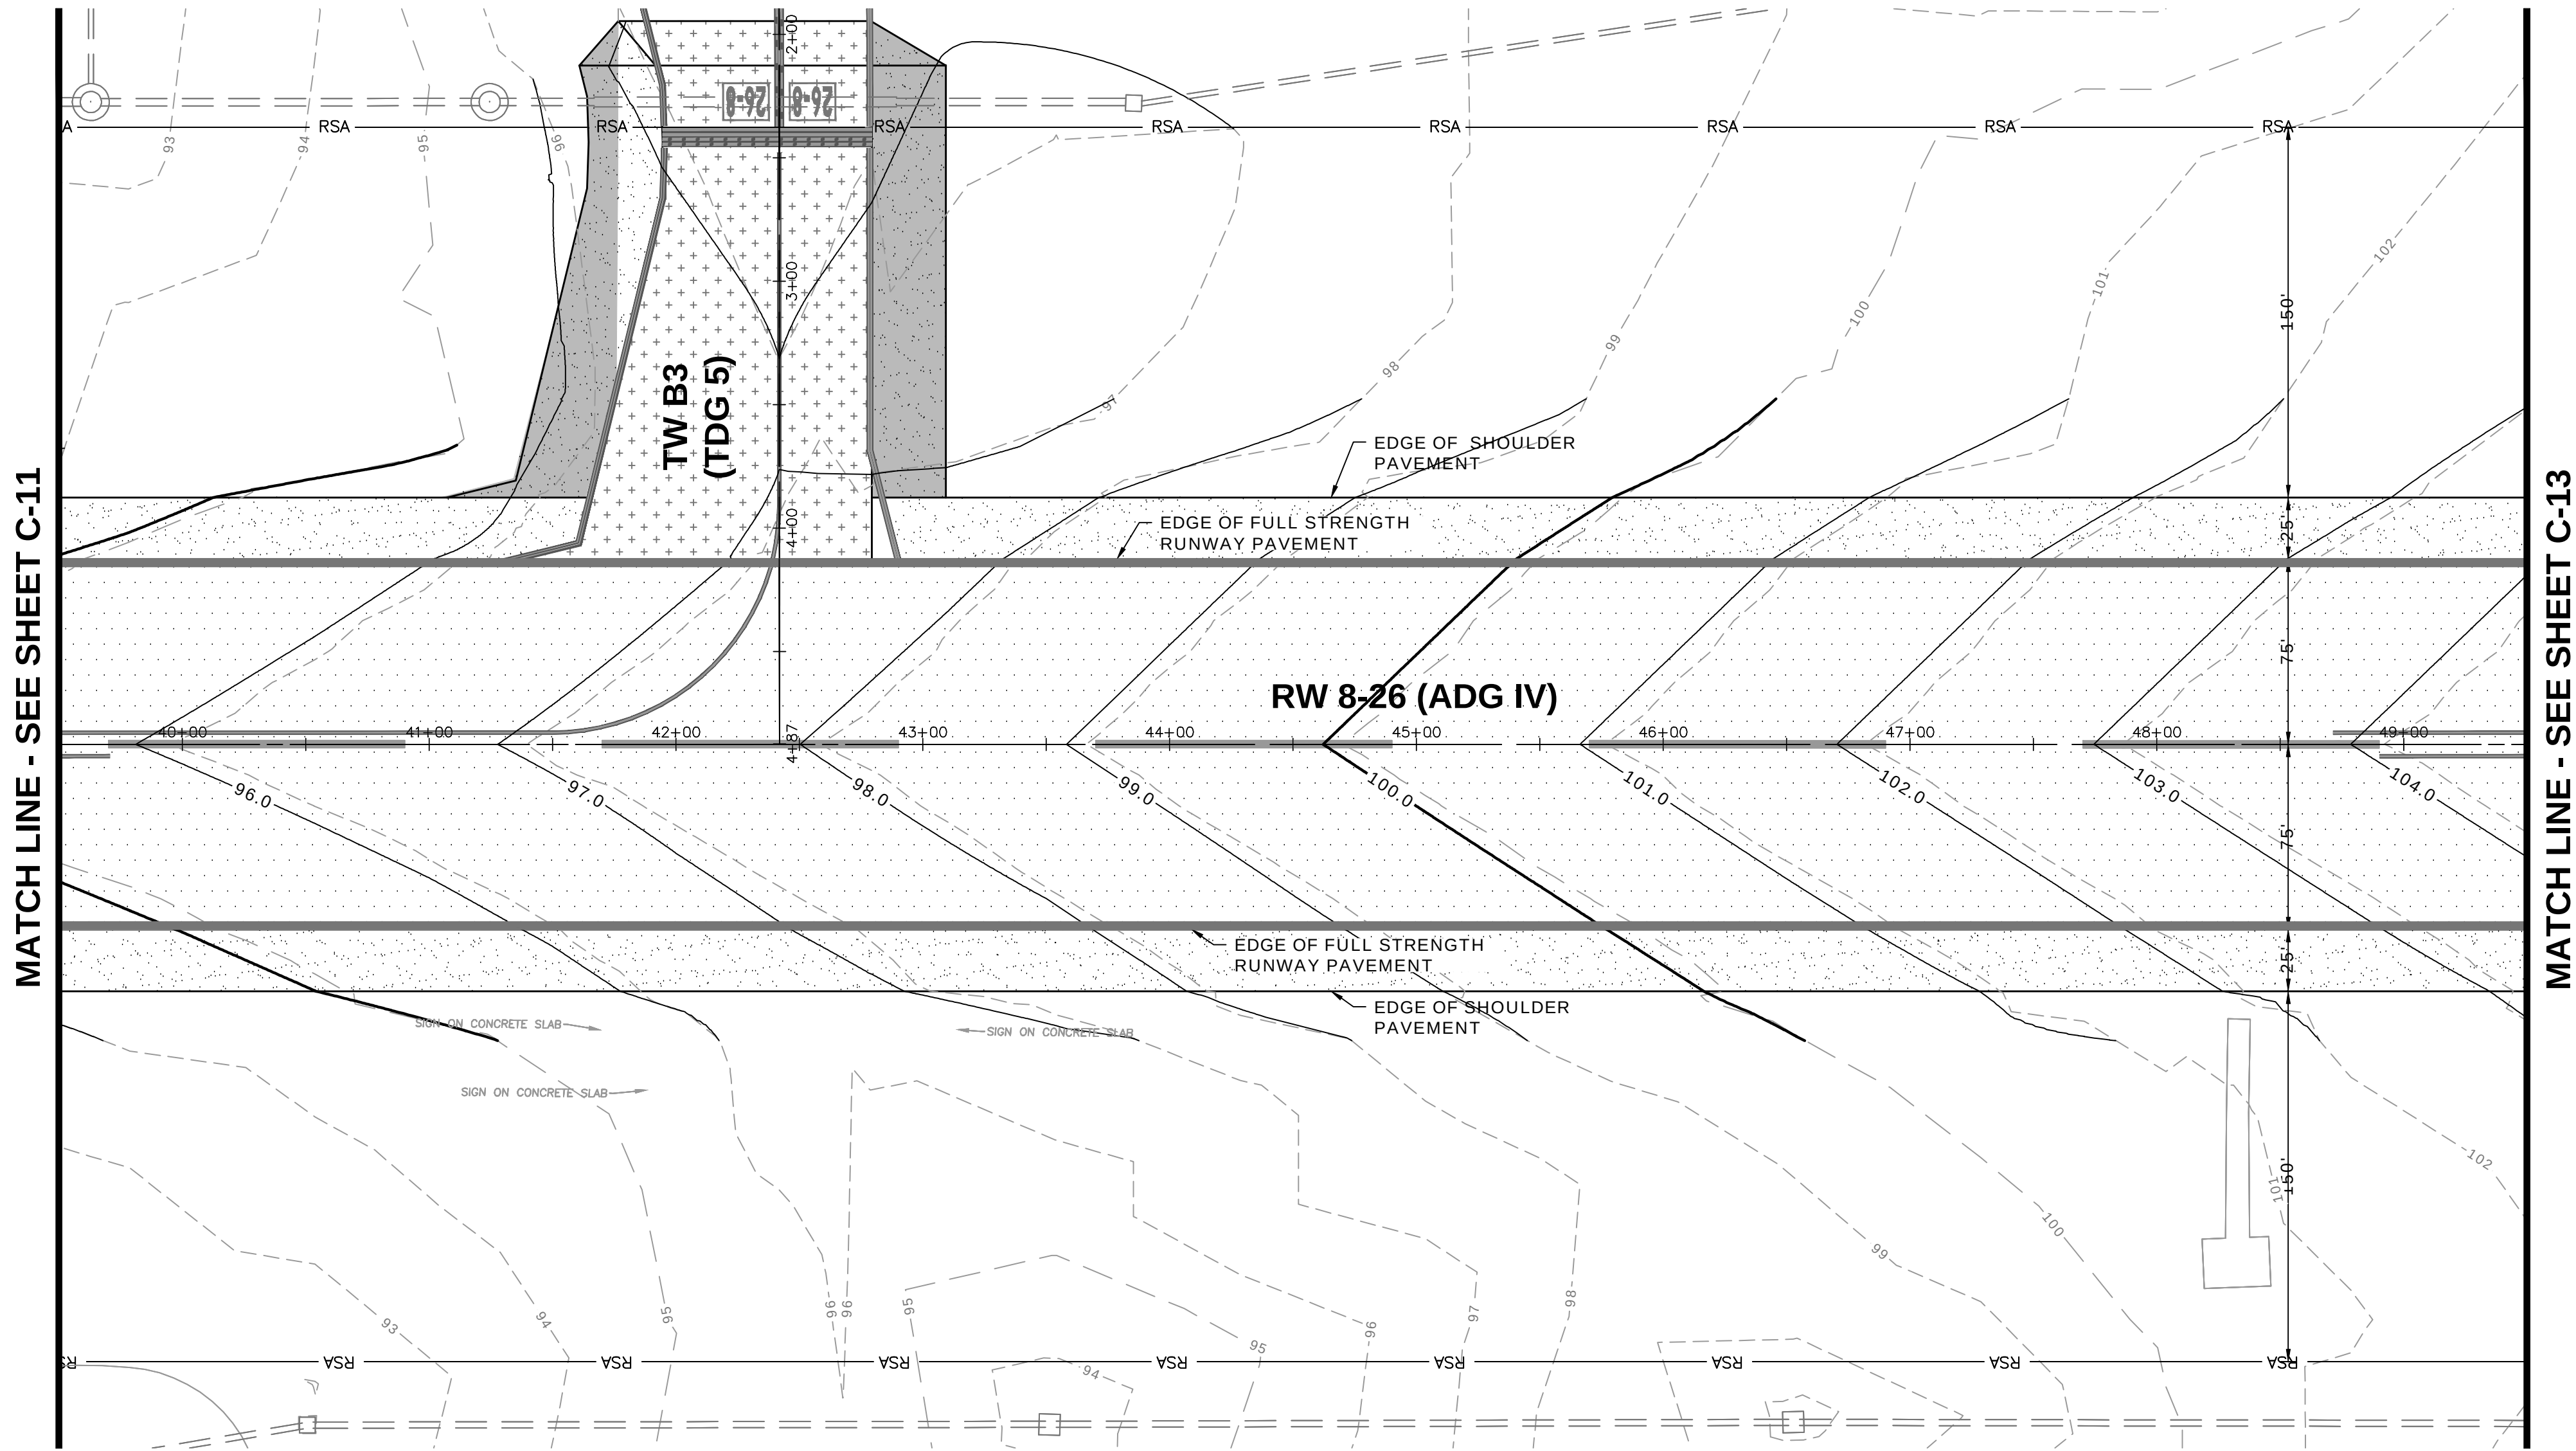

PAVEMENT SECTION NOTES

- SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
- SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS

LEGEND


- EXISTING PAVEMENT
- EXISTING STORM PIPE
- FAA
- EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DETAIL NUMBER
- DETAIL SHEET NUMBER
- RUNWAY ASPHALT PAVEMENT OVERLAY
- TAXIWAY ASPHALT PAVEMENT OVERLAY
- SHOULDER ASPHALT PAVEMENT OVERLAY
- BLAST PAD ASPHALT PAVEMENT OVERLAY
- NEW TAXIWAY PAVEMENT
- NEW SHOULDER PAVEMENT

North

0 25 50 100

GRAPHIC SCALE IN FEET

1" = 50'

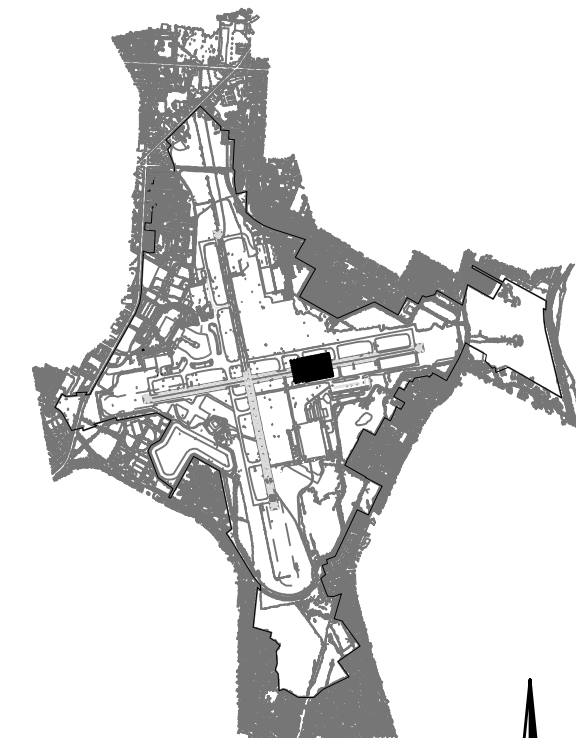


KEYMAP

SCALE: 1" = 5000'

North

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

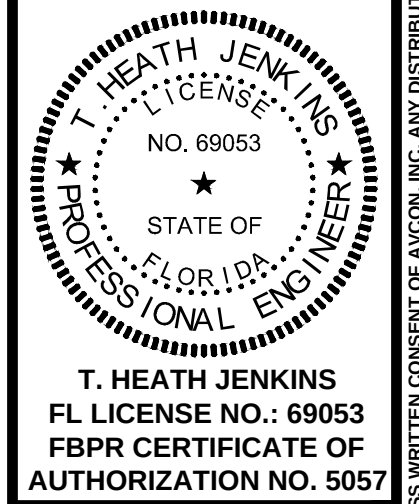

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF AUTHORIZATION NO. 5057

NO.	DATE	REVISION	BY
4-22-25			JLW

8-26 PLAN AND PROFILE
(SHEET 5 OF 8)

ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION

PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025





SHEET NUMBER



C-12



1. SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
2. SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS


LEGEND

	EXISTING PAVEMENT
	EXISTING STORM PIPE
	EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
	EXISTING CONTOUR
	PROPOSED CONTOUR
	DETAIL NUMBER DETAIL SHEET NUMBER
	RUNWAY ASPHALT PAVEMENT OVERLAY
	TAXIWAY ASPHALT PAVEMENT OVERLAY
	SHOULDER ASPHALT PAVEMENT OVERLAY
	BLAST PAD ASPHALT PAVEMENT OVERLAY
	NEW TAXIWAY PAVEMENT
	NEW SHOULDER PAVEMENT

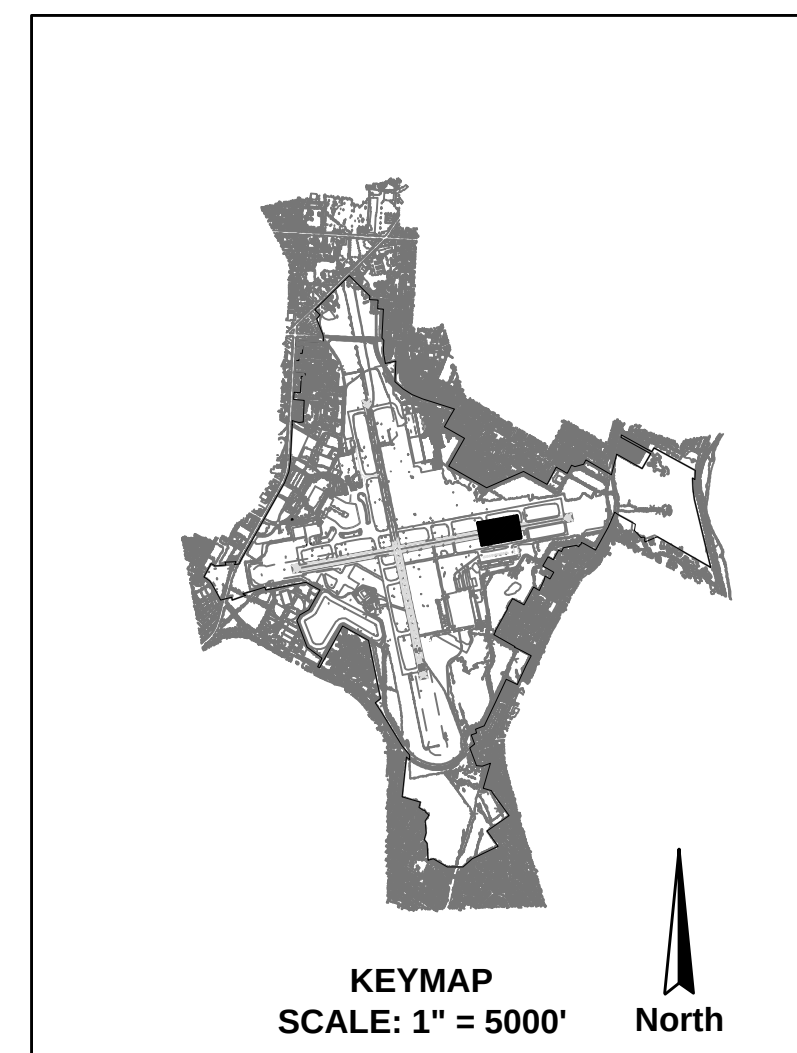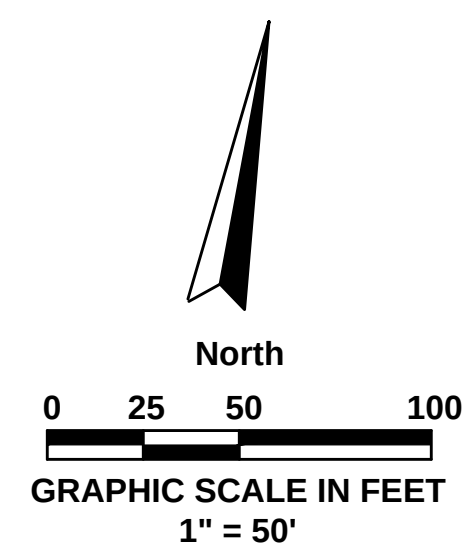


AVCON, INC.
ENGINEERS & PLANNERS

3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL. 32503
OFFICE: (950) 698-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
www.avconinc.com

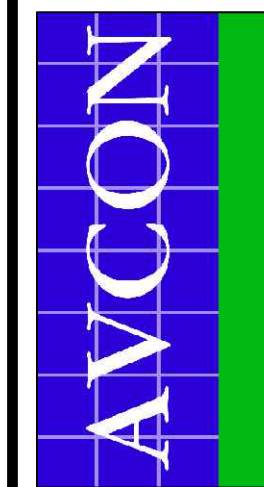

**TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY**

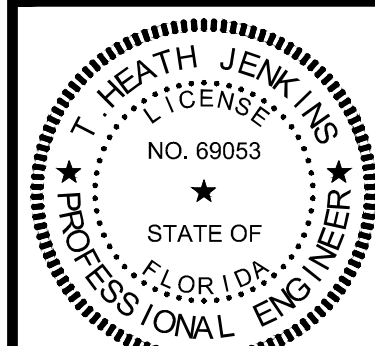

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF
AUTHORIZATION NO. 505

1	4-22-25	ADDENDUM #3	JLW
2			RV
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			

8-26 PLAN AND
PROFILE
(SHEET 6 OF 8)

ISSUED FOR BID DRAWINGS

RUNWAY 8-26 REHABILITATION



PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: TH
DRAWN BY: JLV
CHECKED BY: TH
APPROVED BY: VCI
PROJECT NO: 24.0359.0
DATE: MARCH 28, 202

SHEET NUMBER

C-13

N:\NICEVILLE-PROJECTS\359 CITY OF PENSACOLA-AIRPORT\2024-0359.01-PNS RUNWAY 8-26\000 CAD\24035901_PLAN AND PROFILE.DWG 4/22/2025 12:43 PM

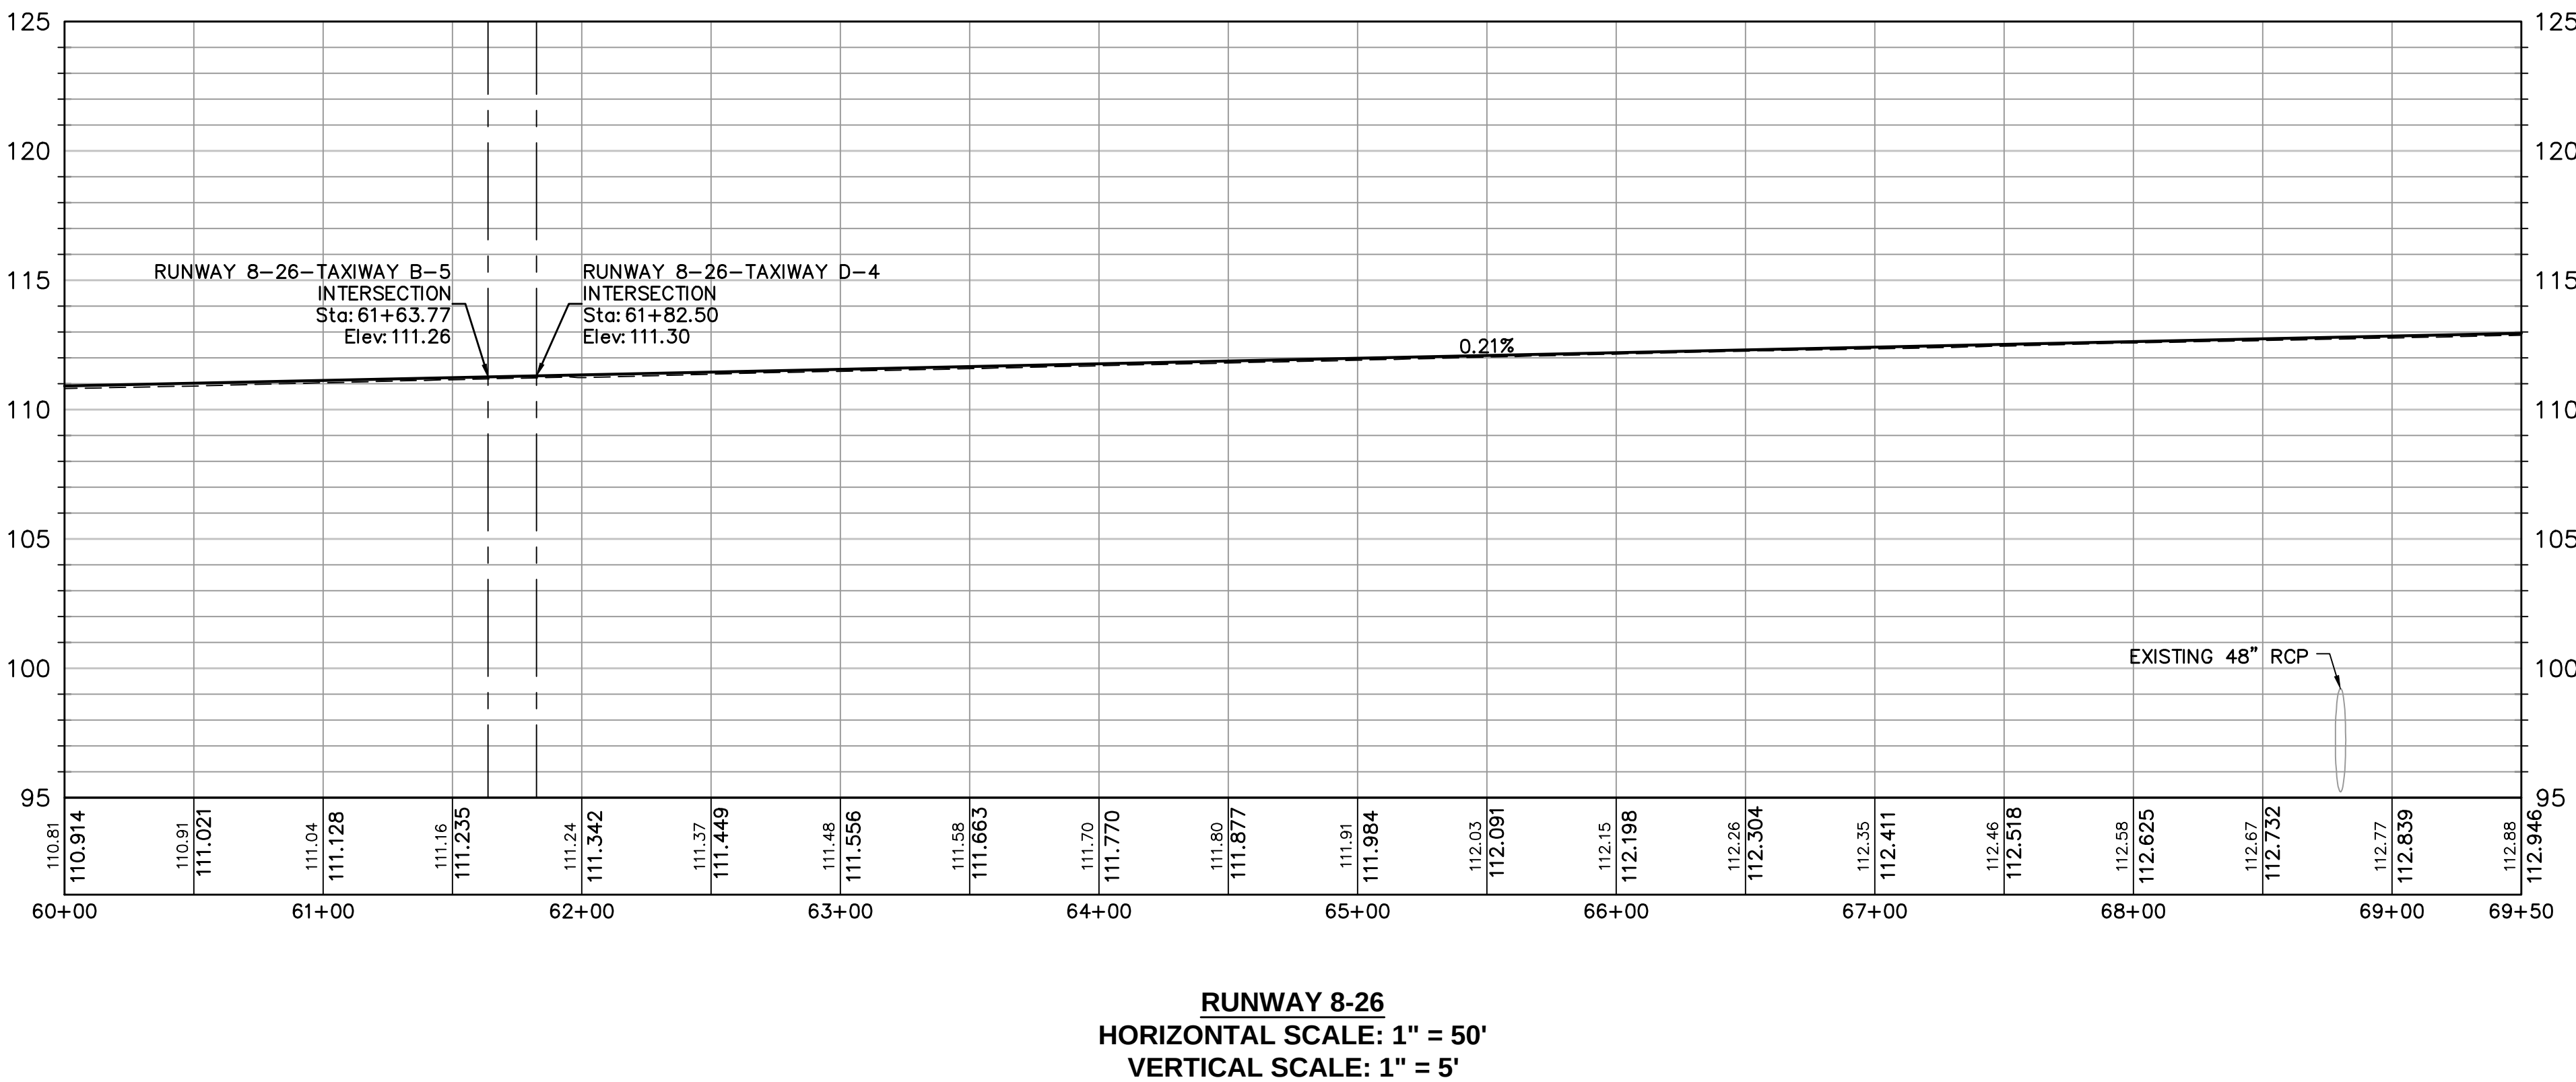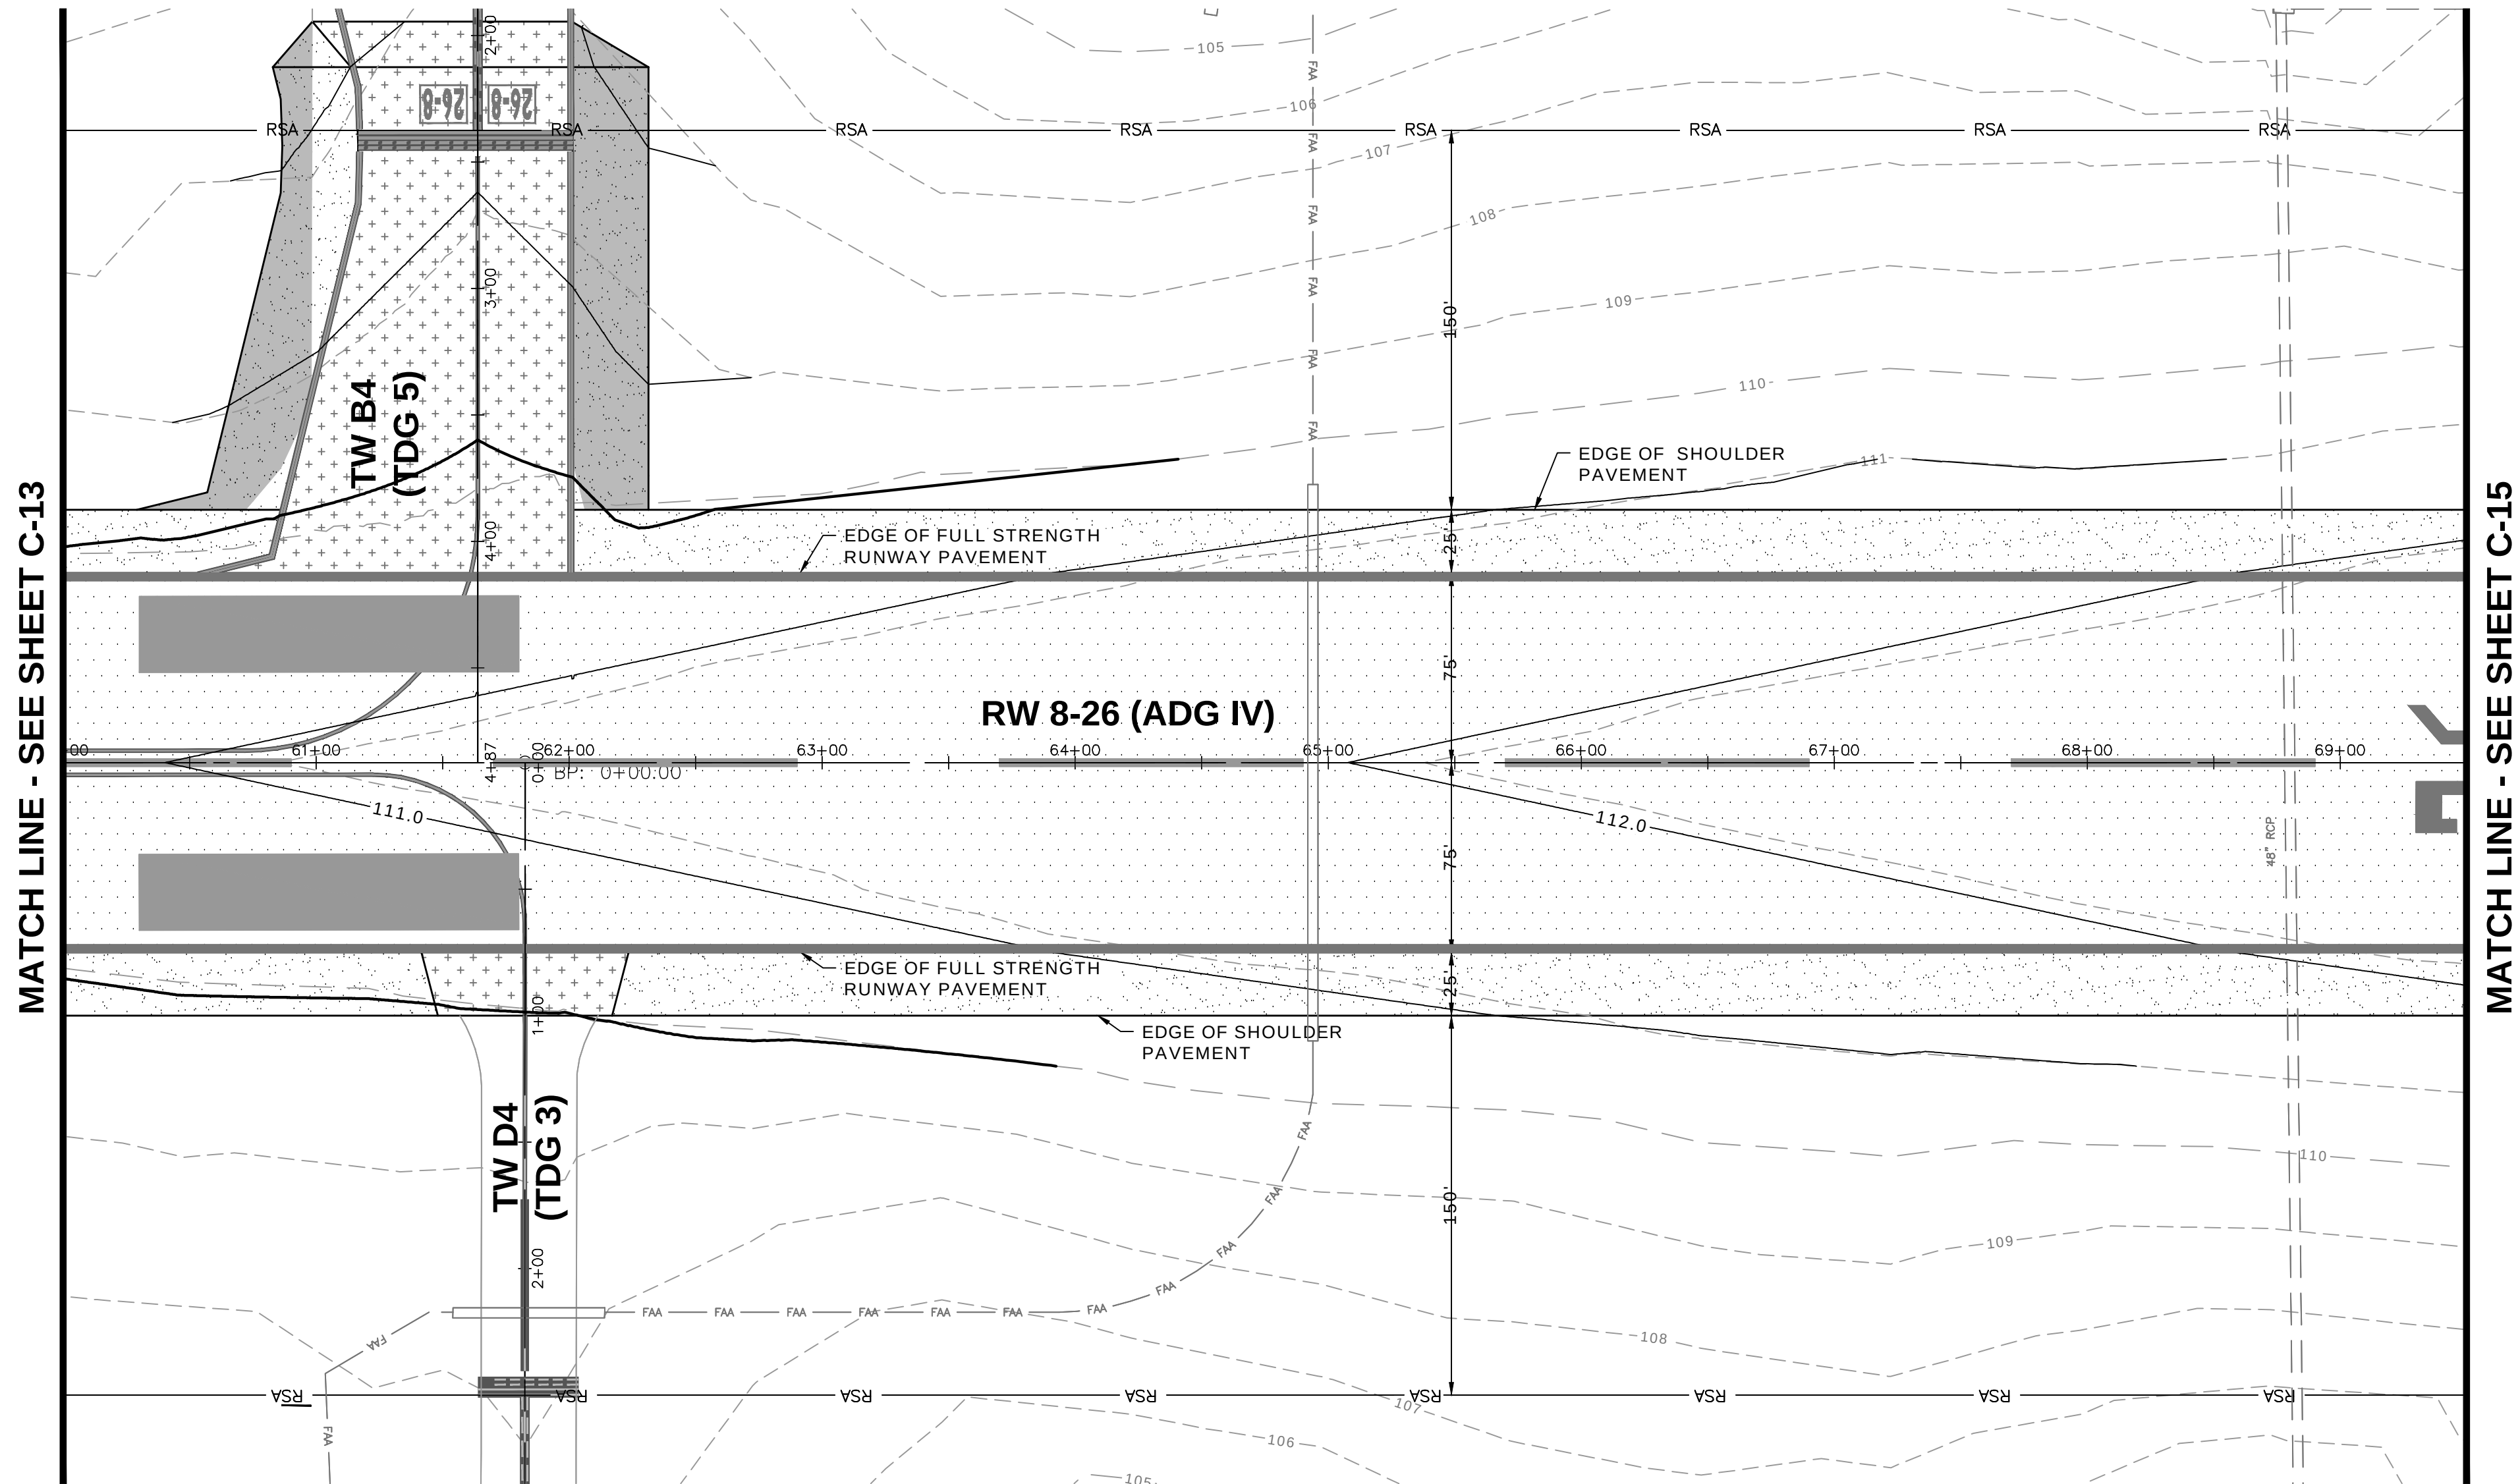

PAVEMENT SECTION NOTES

- SEE SHEET C-4 FOR PAVEMENT DEMOLITION SECTIONS PER STATIONS
- SEE SHEET C-5 FOR PROPOSED PAVEMENT SECTIONS PER STATIONS

LEGEND


- EXISTING PAVEMENT
- EXISTING STORM PIPE
- EXISTING FAA FIBER OPTIC LINES PER RECORD DRAWINGS
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DETAIL NUMBER
- DETAIL SHEET NUMBER
- RUNWAY ASPHALT PAVEMENT OVERLAY
- TAXIWAY ASPHALT PAVEMENT OVERLAY
- SHOULDER ASPHALT PAVEMENT OVERLAY
- BLAST PAD ASPHALT PAVEMENT OVERLAY
- NEW TAXIWAY PAVEMENT
- NEW SHOULDER PAVEMENT

North

0 25 50 100

GRAPHIC SCALE IN FEET

1" = 50'

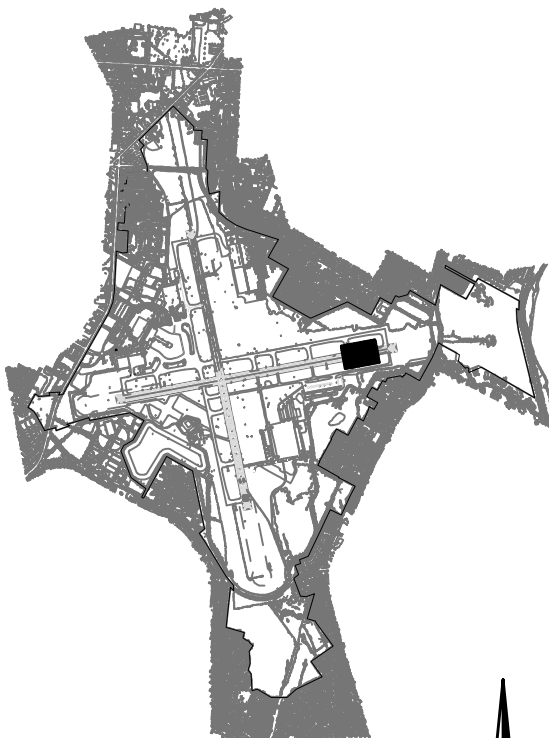


KEYMAP


SCALE: 1" = 5000'

North

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-5526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

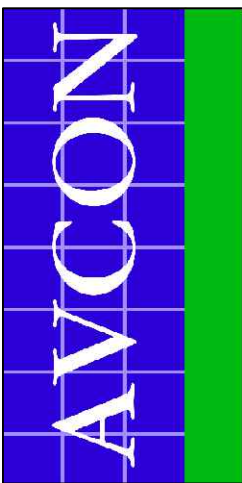

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

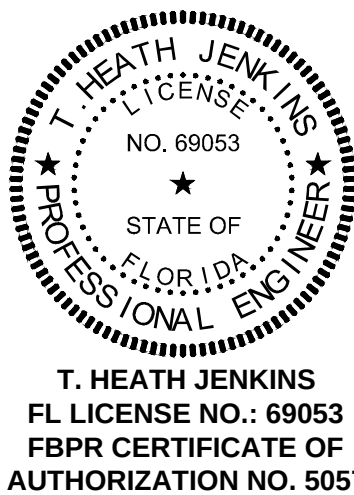

T. HEATH JENKINS
FL LICENSE NO.: 69053
FBPR CERTIFICATE OF
AUTHORIZATION NO. 5057

NO.	DATE	BY	REVISION	ADDENDUM #3
1	4-22-25	JLW		

8-26 PLAN AND
PROFILE
(SHEET 7 OF 8)

ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION

PREPARED FOR

PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: THJ
DRAWN BY: JLW
CHECKED BY: THJ
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER

C-14

NOTES:

1.

PROJECT PAY ITEMS: THE PROJECT PAY ITEMS ARE PROVIDED TO BE INCLUSIVE OF ALL WORK TO BE PERFORMED AS SHOWN IN THE CONTRACT DOCUMENTS. ALL WORK NOT IDENTIFIED WITH A SPECIFIC PAY ITEM SHALL BE CONSIDERED REQUIRED WORK TO COMPLETE THE PROJECT, AND SHALL BE CONSIDERED SUBSIDIARY TO THE COST OF PROJECT PAY ITEMS PROVIDED.
2.

WHENEVER, IN THE CONTRACT DOCUMENTS, THE WORDS "PROVIDE", "FURNISH", "INSTALL", "FURNISH AND INSTALL", OR OTHER WORDS OF LIKE IMPORT ARE USED, IT SHALL BE UNDERSTOOD THAT THE INTENT OF THE CONTRACT DOCUMENTS IS TO PROVIDE FOR THE CONSTRUCTION AND COMPLETION IN EVERY DETAIL OF THE WORK DESCRIBED. IT IS FURTHER INTENDED THAT THE CONTRACTOR SHALL FURNISH ALL LABOR, SUPERVISION, MATERIALS, EQUIPMENT, TOOLS, TRANSPORTATION, SUPPLIES, TESTING AND INCIDENTALS REQUIRED TO COMPLETE THE WORK IN ACCORDANCE WITH THE DRAWINGS (PLANS), SPECIFICATIONS AND TERMS OF THE CONTRACT.
3.

THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL REQUIRED PERMITS, LICENSES, ETC., PRIOR TO COMMENCEMENT OF WORK. THE COST OF PERMITS, LICENSES, ETC., SHALL BE INCIDENTAL TO AND INCLUDED IN THE BID PRICE FOR THE RESPECTIVE PAY ITEMS. PROVIDE AND PAY FOR ALL PERMITS, LICENSES, FEES AND INSPECTIONS REQUIRED FOR THE PERFORMANCE OF THE WORK. THE CONTRACTOR SHALL PAY ALL SALES, CONSUMER, USE AND OTHER TAXES REQUIRED IN ACCORDANCE WITH THE LAW OF THE PLACE OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE TO OBTAIN AND PAY FOR ALL REQUIRED LICENSES, FEES AND INSPECTIONS INCLUDING METER INSTALLATION FEE. THE COST FOR SUCH SHALL BE INCLUDED IN THE BID PRICE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONTACT THE APPLICABLE UTILITY COMPANY(S) TO DETERMINE IF ANY FEES, CHARGES OR COSTS WILL BE DUE THE UTILITY COMPANY(S) AS REQUIRED BY THE UTILITY COMPANY(S) FOR TEMPORARY POWER, INSTALLATIONS, HOOK-UPS, ETC. THIS FEE, CHARGE OR COST SHALL BE INCLUDED IN THIS CONTRACTOR'S PRICE.
4.

ITEMS SHOWN IN SCREEN (HALFTONE) ARE EXISTING OR CIVIL ITEMS. ITEMS SHOWN IN SOLID (BOLD) ARE NEW TO BE INSTALLED UNDER THIS CONTRACT, UNLESS OTHERWISE NOTED.
5.

ANY EXCAVATION WITHIN 5 FEET OF ALL EXISTING UNDERGROUND UTILITIES SHALL BE PERFORMED BY HAND EXCAVATION METHODS. EXISTING DIRECT BURIED CABLES TO REMAIN SHALL BE ENCLOSED IN SPLIT DUCT AND ENCASED IN A 3" ENVELOPE OF P-610 CONCRETE UNDER THE FOLLOWING CONDITIONS: (SEE DETAIL SHEETS)

A.

WHEN WITHIN 20 FEET OF EXCAVATION, TRENCHING, ETC.

B.

WHEN PAVEMENT WIDENING OR EXTENSIONS WILL BE ROUTED OVER THE EXISTING CABLE. THE SPLIT DUCT WILL EXTEND 20 FEET BEYOND THE NEW EDGE OF PAVEMENT.

C.

WHEN ENCOUNTERED DURING CONSTRUCTION.

D.

WHEN SUBJECT TO DAMAGE, IN THE OPINION OF THE PROJECT MANAGER FROM CONSTRUCTION ACTIVITIES.
- AN END OF DUCT MARKER SHALL BE INSTALLED ABOVE EACH END OF THE DUCT. ALL DAMAGE TO UTILITIES OR EXISTING STRUCTURES SHALL BE IMMEDIATELY REPORTED TO THE PROJECT MANAGER. THE PROJECT MANAGER SHALL DETERMINE WHETHER REPAIR OR REPLACEMENT IS NECESSARY. REFER TO THE SPECIAL PROVISIONS OF THE CONTRACT FOR LIQUIDATED DAMAGES THAT MAY RESULT FROM DAMAGE TO EXISTING UTILITIES OR SYSTEMS. ALL REPAIR METHODS SHALL BE SUBMITTED TO THE PROJECT MANAGER FOR REVIEW AND APPROVAL PRIOR TO INITIATING THE WORK. HAND DIGGING AND PROTECTION OF EXISTING SYSTEMS SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE ITEM BEING INSTALLED.
6.

THE AIRPORTS MAINTENANCE DEPARTMENTS' "LOCK-OUT/TAG-OUT" PROCEDURE AND NFPA 70E SHALL BE COMPLIED WITH BY THIS CONTRACTOR.
7.

THIS CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO STARTING WORK.
8.

EXISTING CONDUIT, DUCT BANK, CIRCUITING AND UTILITY INFORMATION IS BASED ON AIRPORT "AS-BUILT" AND "RECORD" DRAWINGS, AND SITE VISITS BY THE UTILITIES AND THE PROJECT MANAGER. THE EXISTING UTILITY LOCATIONS SHOWN ON THE PLANS ARE APPROXIMATE AND SHALL NOT BE SCALED FOR EXACT LOCATIONS. IT SHALL BE THE RESPONSIBILITY OF THIS CONTRACTOR TO CONTACT THE APPROPRIATE UTILITY/AGENCY, PRIOR TO STARTING WORK, AND STAKE/MARK THE LOCATION OF ALL EXISTING UTILITIES. ANY INTERRUPTION OF AN EXISTING SYSTEM OR UTILITY SERVICE SHALL BE COORDINATED AND APPROVED BY THE AUTHORITY, AGENCY OR UTILITY HAVING JURISDICTION, PRIOR TO STARTING WORK.
9.

ALL EXISTING SYSTEMS/UTILITIES TO REMAIN SHALL BE PROTECTED FROM DAMAGE. REPLACEMENT OF ANY DAMAGED EXISTING SYSTEMS/UTILITIES TO REMAIN SHALL BE AT THE CONTRACTORS' EXPENSE. FAA CABLES CANNOT BE SPLICED. DAMAGE TO FAA CABLES WILL RESULT IN THE CONTRACTOR BEING RESPONSIBLE FOR COMPLETE REPLACEMENT OF THE FAA CABLE.
10.

ELECTRICAL DEMOLITION WORK SHALL BE LIMITED TO THE AREAS AND SCHEDULES IDENTIFIED IN THE APPROVED CONTRACTOR SUBMITTED PHASING PLAN. CONTRACTOR SHALL MAINTAIN OPERATIONAL STATUS OF RUNWAY – TAXIWAY LIGHTING SYSTEMS UNTIL PERMISSION FROM PROJECT MANAGER IS GRANTED TO DEMOLISH. DEMOLITION SHALL BE PHASED AS REQUIRED TO MAINTAIN AIRPORT OPERATIONS.
11.

ALL WORK SHOWN ON THE EXISTING CONDITIONS AND DEMOLITION DRAWINGS IS BASED ON FIELD OBSERVATION OF THE ACTUAL EXISTING CONDITIONS AND ON EXISTING "AS-BUILT" DRAWINGS OF THE AREAS AFFECTED. THEY ARE THEREFORE CONSIDERED TO BE SCHEMATIC. IT IS THE INTENT OF THE DEMOLITION DRAWINGS THAT ALL EQUIPMENT, DEVICES, FIXTURES, WIRING MATERIALS, SYSTEMS AND APPURTENANCES, ETC., WHICH ARE NO LONGER REQUIRED AS A RESULT OF THE PROJECT BE REMOVED.
12.

IT SHALL BE THE CONTRACTORS' RESPONSIBILITY TO DETERMINE THAT ALL AIRFIELD LIGHTING CIRCUITS, EXCEPT THOSE THAT ARE SERVING CLOSED TAXIWAYS OR RUNWAYS, ARE COMPLETELY OPERATIONAL, USING TOWER CONTROLS, AT THE END OF EACH WORK SHIFT AND SHALL SO CERTIFY TO THE PROJECT MANAGER BEFORE THE END OF EACH SHIFT. THE CONTRACTOR SHALL NOT LEAVE THE WORK SITE UNTIL CIRCUIT OPERATION HAS BEEN CONFIRMED BY THE PROJECT MANAGER. TEMPORARY CABLE CONNECTIONS SHALL BE MADE IN AIRFIELD LIGHTING CIRCUITS WHEN PERMANENT WIRING CANNOT BE COMPLETED DURING DAYLIGHT HOURS. ALL RUNWAYS AND TAXIWAYS NOT CLOSED FOR CONSTRUCTION (REFER TO PHASING PLAN) SHALL HAVE FULLY OPERABLE AIRFIELD LIGHTING DURING THE HOURS BETWEEN ONE HOUR BEFORE DUSK AND ONE HOUR AFTER DAWN AND AS REQUIRED BY AIRPORT OPERATIONS. THE CONTRACTOR SHALL DISCUSS THE CONTRACTOR'S PROPOSED WIRING WITH THE PROJECT MANAGER AND OBTAIN APPROVAL PRIOR TO COMMENCING WORK IN THAT AREA. ALL ELECTRICAL WIRING SHALL BE COMPLETED AND TESTED ONE (1) HOUR PRIOR TO ELECTRICAL MAINTENANCE DEPARTMENT'S END OF SHIFT.
13.

ALL JCP SHALL BE INSTALLED 20.00 FEET MINIMUM FROM THE EDGE OF PAVEMENT. COORDINATE FINAL LOCATION WITH AIRPORT AND EXISTING CONDITIONS. WHEN EXTENDING EXISTING DUCT TO NEW JCP, PUT JCP IN LINE WITH EXISTING DUCT, WHEN POSSIBLE. JCP SHALL NOT BE INSTALLED IN DITCHES, DRAINAGE SWALES OR WHERE WATER WILL POND ON TOP OF THE JCP.
14.

DEWATERING FOR THE INSTALLATION OF JCP, BASE CANS, DUCT BANKS, COUNTERPOISE OR CONDUITS ARE INCIDENTAL TO THE RESPECTIVE PAY ITEM. THE CONTRACTOR SHALL BE RESPONSIBLE TO PAY FOR AND OBTAIN ANY AND ALL PERMITS REQUIRED FOR DEWATERING.
15.

LOCATE AND UTILIZE EXISTING DUCTS WHERE SHOWN ON PLANS. MANDREL EXISTING DUCTS TO DETERMINE ACCEPTABILITY FOR USE. THE COST OF MANDRELLING THE EXISTING DUCTS SHALL BE INCIDENTAL TO THE DUCT INSTALLATION PAY ITEM. IF EXISTING DUCTS SHOWN ARE DAMAGED, NONEXISTENT, OR ROUTED DIFFERENTLY, CONTACT THE PROJECT MANAGER.
16.

INSTALL CABLING IN EXISTING DUCTS AS SHOWN IN THE CONTRACT DOCUMENTS.
17.

THE IDENTITY OF ALL CABLES SHOWN ON THE PLANS SHALL BE VERIFIED IN THE FIELD. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT MANAGER AND RECORDED IN THE DRAWINGS TO PROVIDE AN ACCURATE RECORD CONDITION. THE CONTRACTOR SHALL COORDINATE INFORMATION SHOWN ON THE PLAN SHEETS WITH EXISTING RECORD INFORMATION AVAILABLE THROUGH THE AIRPORT MAINTENANCE STAFF. THESE PLANS DO NOT PURPORT TO SHOW ALL EXISTING CABLES/CONCEALED UTILITIES WHICH WILL REQUIRE STAKE OUT PRIOR TO CONSTRUCTION.

18.

ALL LOOSE MATERIALS SHALL BE REMOVED FROM ALL EXCAVATIONS FOR ELECTRICAL EQUIPMENT, RACEWAYS, MANHOLES, PADS, ETC. THE BOTTOM OF THE EXCAVATION SHALL BE COMPACTED TO THE FOLLOWING CRITERIA PRIOR TO THE INSTALLATION OF THE ELECTRICAL ITEM AND BACKFILL.

SOIL TYPE	DESIGN AIRCRAFT GROSS WEIGHT	TEST STANDARD	UNDER PAVEMENT OR IN SAFETY AREA	IN TURF
<30% RETAINED ON 3/4" SIEVE	>60,000 LBS	ASTM D1557	100%	98%
<30% RETAINED ON 3/4" SIEVE	≤60,000 LBS	ASTM D698	100%	98%
>30% RETAINED ON 3/4" SIEVE	>60,000 LBS	AASHTO T-180	100%	98%
>30% RETAINED ON 3/4" SIEVE	≤60,000 LBS	AASHTO T-99	100%	98%
19.

DURING THE DEMOLITION PHASE AND PRIOR TO CONSTRUCTION THE CONTRACTOR SHALL VERIFY THAT FUNCTIONAL RACEWAY EXISTS FROM BASE CAN TO BASE CAN, ETC TO CIRCUIT THE AIRFIELD LIGHTING AS SHOWN ON THE CIRCUITING PLANS. SHOULD ADDITIONAL RACEWAY NEED TO BE INSTALLED THE CONTRACTOR SHALL INSTALL THE RACEWAY PRIOR TO THE PAVING OPERATIONS. THE CONTRACTOR SHALL CERTIFY IN WRITING TO THE PROJECT MANAGER PRIOR TO PAVING OPERATIONS THAT FUNCTIONAL RACEWAY EXISTS AND IS PROPERLY ROUTED TO PROVIDE FOR CIRCUITING IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. SEE SHEETS E301 – E311 FOR CIRCUITING.
20.

THE CONTRACTOR SHALL THOROUGHLY REVIEW THE EXISTING DUCT BANK CONDITIONS. THE CONTRACTOR WILL BE REQUIRED TO INSTALL THE NEW CABLES IN DUCTS WITH EXISTING CABLES. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR THE PROTECTION OF THE EXISTING CABLES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OR REPLACEMENT OF CABLES DAMAGED DURING CONSTRUCTION. REPAIR OR COMPLETE REPLACEMENT SHALL BE AT THE PROJECT MANAGER DISCRETION. THE COST OF REPAIR OR REPLACEMENT SHALL BE AT THE CONTRACTOR'S EXPENSE.
21.

THE CONTRACTOR SHALL COMPLETELY SURVEY AND STAKE OUT EACH AREAS' LIGHTING LAYOUT PRIOR TO STARTING ANY INSTALLATION. SHOULD ANY IRREGULARITIES OCCUR IN THE LIGHTING LAYOUT, THE PROJECT MANAGER SHALL BE NOTIFIED IMMEDIATELY. THE BID ITEM PRICE SHALL INCLUDE THE NECESSARY LAYOUT FOR EACH FIXTURE, AND THE COST FOR ANY ADDITIONAL ADJUSTMENT OF THE LOCATION OF THE FIXTURES, DUE TO THE EXISTING GEOMETRIC CONDITIONS. THE NEW LIGHTING INSTALLATION SHALL BE COORDINATED WITH AND BLEND INTO THE EXISTING INSTALLATION.
22.

WITHIN THE CONTRACTOR'S WORK SCOPE, REPLACE ALL LIGHT BASE AND JUNCTION CAN BOLTS AND LOCK WASHERS. BOLTING HARDWARE SHALL NOT BE REUSED. REPAIR DAMAGED THREADS IN LIGHT BASES AND JUNCTION CANS UTILIZING THREADED INSERTS AS MANUFACTURED BY OLSEN INDUSTRIES OR USING THE DRILL FIXTURE KIT WITH GARDSERT THREAD REPAIR PROVIDED BY JAQUITH INDUSTRIES OR ACCEPTED EQUIVALENT. CONTRACTOR SHALL TURN OVER THE TOOLS TO THE AIRPORT ONCE THE REPAIRS HAVE BEEN COMPLETED. APPLY ANTI-SEIZE COMPOUND TO BOLTS AS RECOMMENDED BY FIXTURE/CAN MANUFACTURER.
23.

INSTALL BASE CANS AND CONDUIT/DUCT AS SHOWN IN THE PLANS.
24.

EACH EXISTING AND PROPOSED BASE CAN SHALL BE CLEANED OF ALL SAND AND DEBRIS.
25.

EACH EXISTING AND PROPOSED CONDUIT/DUCT IDENTIFIED FOR THE PROPOSED WORK BE CLEANED AND SWABBED THROUGHOUT ITS ENTIRE LENGTH TO REMOVE ALL SAND AND DEBRIS. THE CONTRACTOR SHALL MANDREL EACH EXISTING AND PROPOSED CONDUIT/DUCT IDENTIFIED FOR THE PROPOSED WORK. AN IRON-SHOD MANDREL, NOT MORE THAN 1/4-INCH SMALLER THAN THE BORE OF THE CONDUIT/DUCT SHALL BE PULLED THROUGH EACH CONDUIT/DUCT. THE MANDREL SHALL HAVE LEATHER OR RUBBER GASKET SLIGHTLY LARGER THAN THE CONDUIT/DUCT BORE.
26.

SECURE COVERS ON ALL BASE CANS, JCP, ETC. ONCE CONDUIT/DUCT AND BASE CANS HAVE BEEN CLEANED, BASE CANS, JCP, ETC. MAY BE OPENED FOR WORK ACTIVITIES BUT SHALL BE CLOSED IMMEDIATELY AFTER ACTIVITY IS COMPLETED. BASE CANS, JCP, ETC. AND ASSOCIATED CONDUITS/DUCTS, FOUND OPEN SHALL BE RECLEANED AT THE CONTRACTOR'S EXPENSE.
27.

THE TERM "TOP CAN SECTION" HAS BEEN GENERICALLY USED IN THE PLANS TO DESCRIBE A TOP CAN SECTION, MIDDLE CAN SECTION, BASE CAN EXTENSION AND OTHER SIMILAR COMPONENTS. THE CONTRACTOR SHALL INDIVIDUALLY MEASURE AND IDENTIFY THE SPECIFIC COMPONENT(S) REQUIRED TO PROPERLY ADJUST THE BASE CAN HEIGHT IN ACCORDANCE WITH FAA REQUIREMENTS. THE CONTRACTOR SHALL INDIVIDUALLY MEASURE AND RECORD THE BOLT CENTER ON EACH BASE CAN TO BE EXTENDED AND THE REQUIRED HEIGHT OF THE BASE CAN TOP SECTION NECESSARY TO PLACE THE FIXTURE AT THE PROPER ELEVATION. THIS RECORDED INFORMATION SHALL BE SUBMITTED AS PART OF THE AS-BUILT INFORMATION.
28.

ABANDONED DUCT BANKS AND CONDUITS SHALL REMAIN IN PLACE WITH REMOVAL NECESSARY ONLY WHERE INTERFERENCES WITH THE NEW WORK EXIST. ANY EXISTING DUCTS REMOVED SHALL BE LEGALLY AND PROPERLY DISPOSED OF OFF THE AIRPORT SITE. THE CONDUITS/DUCTS SHALL BE SQUARELY CUT OFF AND CAPPED WATERTIGHT. AN END OF DUCT MARKER SHALL BE PLACED ABOVE EACH END OF THE ABANDONED IN PLACE CONDUIT/DUCT, AND THE LOCATION SHALL BE NOTED ON THE PROJECT RECORD DRAWINGS.
29.

PERMANENT WIRING ABANDONED IN PLACE SHALL BE TAGGED OR OTHERWISE IDENTIFIED AT IT'S TERMINATION AND JUNCTION POINTS AS "ABANDONED IN PLACE" OR REMOVED FROM ALL ACCESSIBLE AREAS AND INSULATED FROM CONTACT WITH OTHER LIVE ELECTRICAL WIRING OR DEVICES.
30.

ALL RUNWAY/TAXIWAY EDGE LIGHTS ON STRAIGHT SECTIONS OF THE RUNWAY/TAXIWAY, SHALL BE LOCATED SUCH THAT A LINE BETWEEN LIGHTS ON OPPOSITE SIDES OF THE RUNWAY/TAXIWAY IS PERPENDICULAR TO THE RUNWAY/TAXIWAY CENTERLINE.
31.

CHANGES TO THE LOCATION OF THE RUNWAY OR TAXIWAY LIGHTS, SHALL BE SUBMITTED BY THE CONTRACTOR TO THE PROJECT MANAGER FOR APPROVAL.
32.

THE DIMENSION BETWEEN LIGHTS SHOWN ON A RADIUS IS DEFINED AS THE CHORD LENGTH. LOCATIONS SHOWN ARE TO THE CENTER OF THE LIGHTING FIXTURE.
33.

ALL CONCRETE USED FOR ELECTRICAL ITEMS SHALL CONFORM TO STRUCTURAL PORTLAND CEMENT CONCRETE, OR ACCEPTED FDOT CLASS II EQUIVALENT, USING 1 INCH MAXIMUM SIZE COARSE AGGREGATE (DOT #57 STONE) WITH A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 3,400 PSI, UNLESS NOTED OTHERWISE. WHERE REINFORCED DUCT BANKS ARE SPECIFIED, REINFORCING STEEL SHALL CONFORM TO ASTM A 615 GRADE 60. CONCRETE AND REINFORCING STEEL ARE INCIDENTAL TO THE RESPECTIVE PAY ITEM OF WHICH THEY ARE A COMPONENT PART. HIGH EARLY STRENGTH CONCRETE WILL BE REQUIRED FOR USE WITH DUCTS, CONDUITS, BASE CANS AND OTHER WORK AS DIRECTED BY THE PROJECT MANAGER, IN EXISTING OPERATIONAL AREAS AND WITHIN THE SAFETY AREAS OF OPERATIONAL PAVEMENT TO COMPLY WITH THE PROJECT PHASING AND SCHEDULING REQUIREMENTS AND WHERE THE PAVEMENT IS REQUIRED TO OPEN TO AIRCRAFT AT THE END OF THE DESIGNATED WORK PERIOD. THE EXTRA COST FOR THE HIGH EARLY STRENGTH CONCRETE SHALL BE CONSIDERED INCIDENTAL TO THE RESPECTIVE PAY ITEM OF WHICH IT IS A COMPONENT PART.
34.

FLOWABLE MATERIAL USED TO BACK FILL CONDUIT AND DUCT BANK TRENCHES SHALL CONFORM TO THE REQUIREMENTS OF CONCRETE "CONTROLLED LOW STRENGTH MATERIAL" OR ACCEPTED FDOT NON-EXCAVATABLE FLOWABLE FILL (125 PSI MINIMUM) FDOT SPECIFICATION SECTION 121 "STANDARD SPECIFICATION FOR ROAD AND BRIDGE CONSTRUCTION" OR EQUIVALENT.
35.

ALL ITEMS ARE NEW AND UNUSED UNLESS SPECIFICALLY NOTED OTHERWISE.

36.

ELECTRICAL WORK WITHIN THE SAFETY AREA OF AN ACTIVE RUNWAY OR TAXIWAY WILL REQUIRE NIGHT WORK/CLOSURES. ANY WORK THAT COULD INTERFERE WITH NORMAL AIRPORT OPERATIONS WILL REQUIRE NIGHT WORK/CLOSURES. NIGHT WORK/CLOSURES SHALL BE PERFORMED BETWEEN 2300 HOURS AND 0630 HOURS AND BETWEEN ANY LATE ARRIVING OR EARLY DEPARTING FLIGHTS. AVAILABLE NIGHT WORK/CLOSURE HOURS ARE DEPENDANT UPON AIRPORT FLIGHT OPERATIONS AND MAY VARY FROM NIGHT TO NIGHT. NIGHT WORK SHALL BE COORDINATED WITH AND IS SUBJECT TO APPROVAL BY AIRPORT AIRPORT OPERATIONS.
37.

45 DAY MINIMUM NOTICE REQUIRED FOR ANY WORK INVOLVING A FAA OR AIRPORT COMM MANHOLE OR FAA EQUIPMENT. THE NOTICE IS APPLICABLE ANYTIME THE MANHOLE IS OPENED OR ANY WORK INVOLVING CABLES BETWEEN OR WITHIN THE MANHOLES OR ANY WORK IMPACTING FAA EQUIPMENT
38.

NO WORK OF ANY KIND MAY BE PERFORMED ON ANY ACTIVE FAA FACILITIES, FAA CABLES, FAA MANHOLES, OR OWNER COMM MANHOLES DURING THIS PROJECT.
39.

ALL L-868 BASE CANS AND TRANSFORMER HOUSES SHALL BE EQUIPPED WITH ONE INTERNAL AND TWO EXTERNAL GROUND STRAPS EACH WITH GROUND CLAMPS. NOT MORE THAN ONE (1) SINGLE #2 AWG BARE SOLID COPPER CONDUCTOR SHALL BE PERMITTED TO BE TERMINATED ON ANY SINGLE BASE CAN GROUND CLAMP. ALL GROUNDING AND BONDING CONNECTIONS SHALL BE MADE IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS AND LISTINGS. ALL COUNTERPOISE AND GROUNDING/BONDING CONNECTIONS SHALL BE UL 467 LISTED FOR DIRECT EARTH BURIAL AND ENCASEMENT IN CONCRETE AND UL 96 LISTED FOR LIGHTNING PROTECTION. ALL TOP CAN SECTIONS SHALL BE EQUIPPED WITH ONE INTERNAL BASE CAN GROUND STRAP WITH A GROUND CLAMP. LIGHT BASE GROUND CLAMP SHALL BE JAQUITH AW0919, OLSON CL01843 OR ACCEPTED EQUIVALENT. USE OF A BRASS WASHER IN LIEU OF A GROUND CLAMP IS SPECIFICALLY PROHIBITED.
40.

ALL GALVANIZED MATERIALS SHALL BE HOT DIPPED GALVANIZED AFTER FABRICATION, CONFORMING TO ASTM A-386 AND/OR A-153, UNLESS NOTED OTHERWISE (UNO).
41.

ALL OBJECTS INSTALLED WITHIN THE OBJECT FREE AREA SHALL BE CONSTRUCTED TO COMPLY WITH FAA AC 150/5200-13A, AIRPORT DESIGN AND PM/RPRING BRIEF EB-79, DETERMINING RSA NAVAID FRANGIBILITY AND FIXED BY-FUNCTION REQUIREMENT (LATEST EDITIONS). ALL OBJECTS HIGHER THAN 3 INCHES ABOVE GRADE SHALL BE CONSTRUCTED ON FRANGIBLY MOUNTED STRUCTURES OF THE LOWEST PRACTICAL HEIGHT WITH THE FRANGIBLE POINT NO HIGHER THAN 3 INCHES ABOVE GRADE. THE 3 INCH HEIGHT SHALL BE MEASURED IN ACCORDANCE WITH FIGURE 1 OF ENGINEERING BRIEF 79. THE TOP OF ANY ANCHOR BOLTS OR OTHER SUCH APPURTENANCES SHALL NOT EXTEND ABOVE THE FRANGIBLE POINT ON THE FRANGIBLE COUPLING.
42.

UNLESS NOTED OTHERWISE, ALL PANELBOARDS, JUNCTION BOXES, WIRE WAYS AND ETC., SHALL BE SPACED OFF THE CONCRETE STRUCTURE BY USING A UNISTRUT P-1060 SERIES SQUARE WASHER OR ACCEPTED EQUIVALENT BETWEEN THE MOUNTING SURFACE AND THE EQUIPMENT AT EACH MOUNTING POINT. EQUIPMENT AS LISTED ABOVE, MOUNTED ON UNISTRUT OR ACCEPTED EQUIVALENT SHALL HAVE UNISTRUT P-1060 SERIES SQUARE WASHER OR ACCEPTED EQUIVALENT INSTALLED BETWEEN THE UNISTRUT CHANNEL OR ACCEPTED EQUIVALENT AND THE EQUIPMENT AT EACH MOUNTING POINT. ALL BOLTED CONNECTIONS AND EQUIPMENT MOUNTINGS IN DRY LOCATIONS SHALL UTILIZE A FLAT WASHER, LOCK WASHER AND HEX HEAD A-325 BOLTING HARDWARE, UNO.
43.

ALL BOLTING HARDWARE IN DAMP OR WET LOCATIONS SHALL BE STAINLESS STEEL. ALL MOUNTING CHANNEL AND BOLTING HARDWARE IN EXTERIOR, DAMP OR WET LOCATIONS SHALL BE STAINLESS STEEL.
44.

THE CONTRACTOR SHALL GENERATE AND SUBMIT FOR APPROVAL A MAINTENANCE OF POWER PLAN FOR ALL ELECTRICAL SERVICES IMPACTED BY THIS PROJECT. CONTRACTOR SHALL MAINTAIN POWER (PERMANENT OR TEMPORARY) TO ALL FAA OR AIRPORT FACILITIES AT ALL TIMES UNLESS A SCHEDULED OUTAGE IS APPROVED. SCHEDULING AND DURATION OF ANY POWER OUTAGE IS AT THE SOLE DISCRETION OF THE OWNER. COST OF MAINTENANCE OF POWER AND ALL NECESSARY MATERIALS, LABOR, TRANSPORTATION, SUPERVISION AND COORDINATION SHALL BE CONSIDERED INCIDENTAL TO THE L-104 PAY ITEM PROVIDED.

INITIAL PROVISIONING OF CRITICAL PARTS/COMPONENTS

(testing contingency & consumables)
Per AIP Handbook 5100.38D chg. 1


CRITICAL PARTS/COMPONENTS LISTED ON THIS DRAWING AND PROVIDED AS A PART OF THIS PROJECT, SHALL BE ONSITE AND AVAILABLE FOR USE BY THE CONTRACTOR PRIOR TO THE SCHEDULED SYSTEM TESTING. ANY OF THE CRITICAL PARTS/COMPONENTS REPLACED TO SUPPORT TESTING EFFORTS SHALL BE RETURNED TO THE ORIGINAL EQUIPMENT MANUFACTURER (OEM) FOR REPAIR OR REPLACEMENT. ONCE THE CRITICAL PARTS/COMPONENTS ARE RECERTIFIED BY THE OEM, SHIP THE CRITICAL FACTORY PARTS COMPONENTS TO THE AIRPORTS RESIDENT PROJECT REPRESENTATIVE (RPR) FOR TURN OVER TO AIRPORT MAINTENANCE. CRITICAL PARTS/COMPONENTS NOT USED DURING TESTING SHALL BE DELIVERED TO THE AIRPORT'S RPR FOR TURN OVER TO AIRPORT MAINTENANCE.

THERE SHALL BE A MINIMUM OF ONE (1) UNIT OF EACH ITEM PROVIDED AS A PART/COMPONENT OF THE PROJECT.

THE FOLLOWING TABLE LISTS THE ELECTRICAL INITIAL PROVISIONING OF CRITICAL PARTS/COMPONENTS REQUIRED TO BE FURNISHED BY THE CONTRACTOR. ALL INITIAL PROVISIONING OF CRITICAL PARTS/COMPONENTS SHALL BE IDENTICAL TO THE SAME PARTS/COMPONENTS ACCEPTED AND INSTALLED IN THE PROJECT. COST OF INITIAL PROVISIONING OF CRITICAL PARTS/COMPONENTS SHALL BE CONSIDERED INCIDENTAL TO THE L-125 PAY ITEMS PROVIDED.

CATEGORY	DESCRIPTION	QUANTITY
SIZE 3 GENERAL SIGN	LED SIGN POWER SUPPLY/LED CONTROLLER	10 EA
	MODULE LIGHT SOURCES (10 TIMES THE QUANTITY OF LIGHT BARS OR LAMPS CONTAINED IN A SINGLE MODULE)	1 LS
CCR	PC CARD & FUSE KIT	1 LS
FIXTURES	L-850C(L), BIDIRECTIONAL CLEAR/CLEAR, LED HIRL RUNWAY EDGE LIGHT, W/ PROPERLY SIZED L-830 TRANSFORMER	2 EA
	L-850C(L), BIDIRECTIONAL CLEAR/YELLOW, LED HIRL RUNWAY EDGE LIGHT, W/ PROPERLY SIZED L-830 TRANSFORMER	2 EA
	L-861T(L), OMNIDIRECTIONAL BLUE, LED TAXIWAY EDGE LIGHT WITH "CORTEN" BASE PLATE, W/ PROPERLY SIZED L-830 TRANSFORMER	10 EA
	L-862(L), BIDIRECTIONAL CLEAR/YELLOW, LED HIRL RUNWAY EDGE LIGHT WITH "CORTEN" BASE PLATE, W/ PROPERLY SIZED L-830 TRANSFORMER	2 EA
	L-862E(L), BIDIRECTIONAL GREEN/RED, LED HIRL THRESHOLD LIGHT WITH "CORTEN" BASE PLATE, W/ PROPERLY SIZED L-830 TRANSFORMER	2 EA
	FIELD LIGHTNING ARRESTOR ASSEMBLY	1 EA
WIND CONE	LED UNIT AND LED POWER SUPPLY	1 EA

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD, SUITE 26
PENSACOLA, FL 32903
OFFICE: (850) 688-5526
CORPORATE CERTIFICATE OF AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

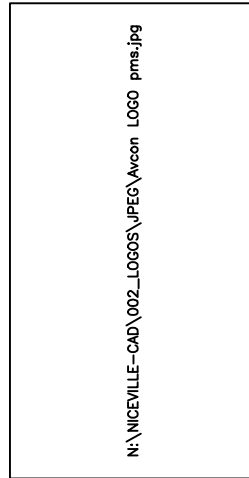

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

SAH								BY
4/25	ADDENDUM 3							REVISION
								DATE
								NO.

AIRFIELD ELECTRICAL
GENERAL NOTES

ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION



PREPARED FOR

PENSACOLA INTERNATIONAL AIRPORT


DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
E001

THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION, ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC., FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC., ANY DISTRIBUTION, REPRODUCTION OR OTHER USE OF THE DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.

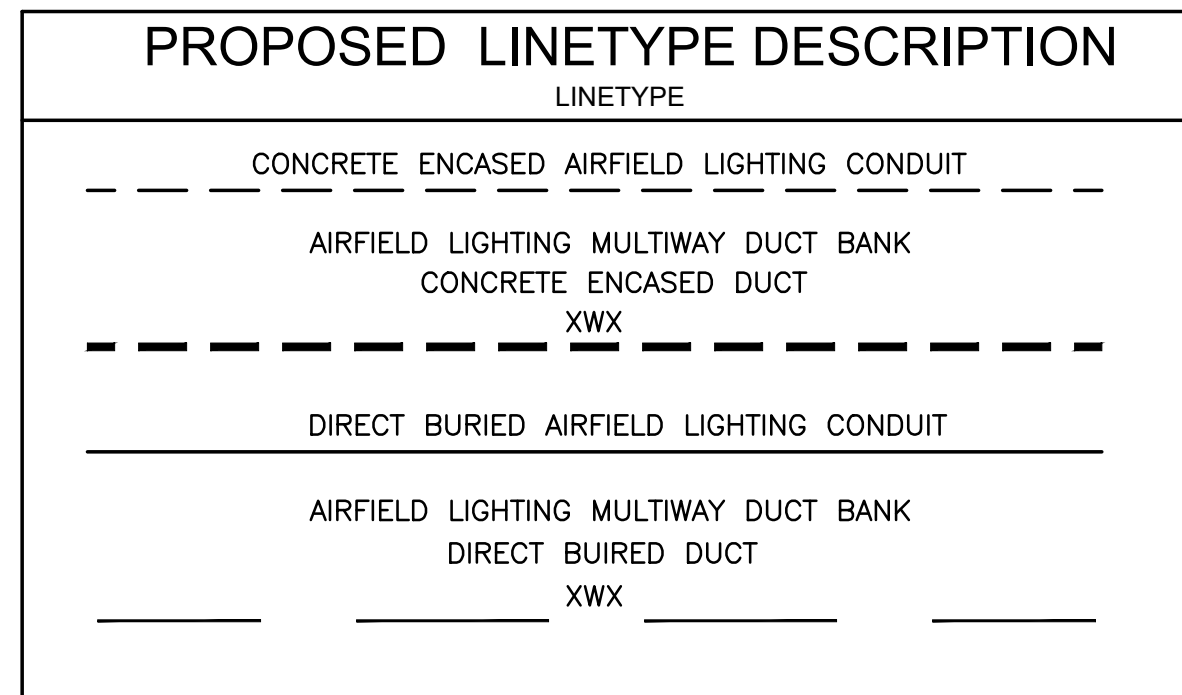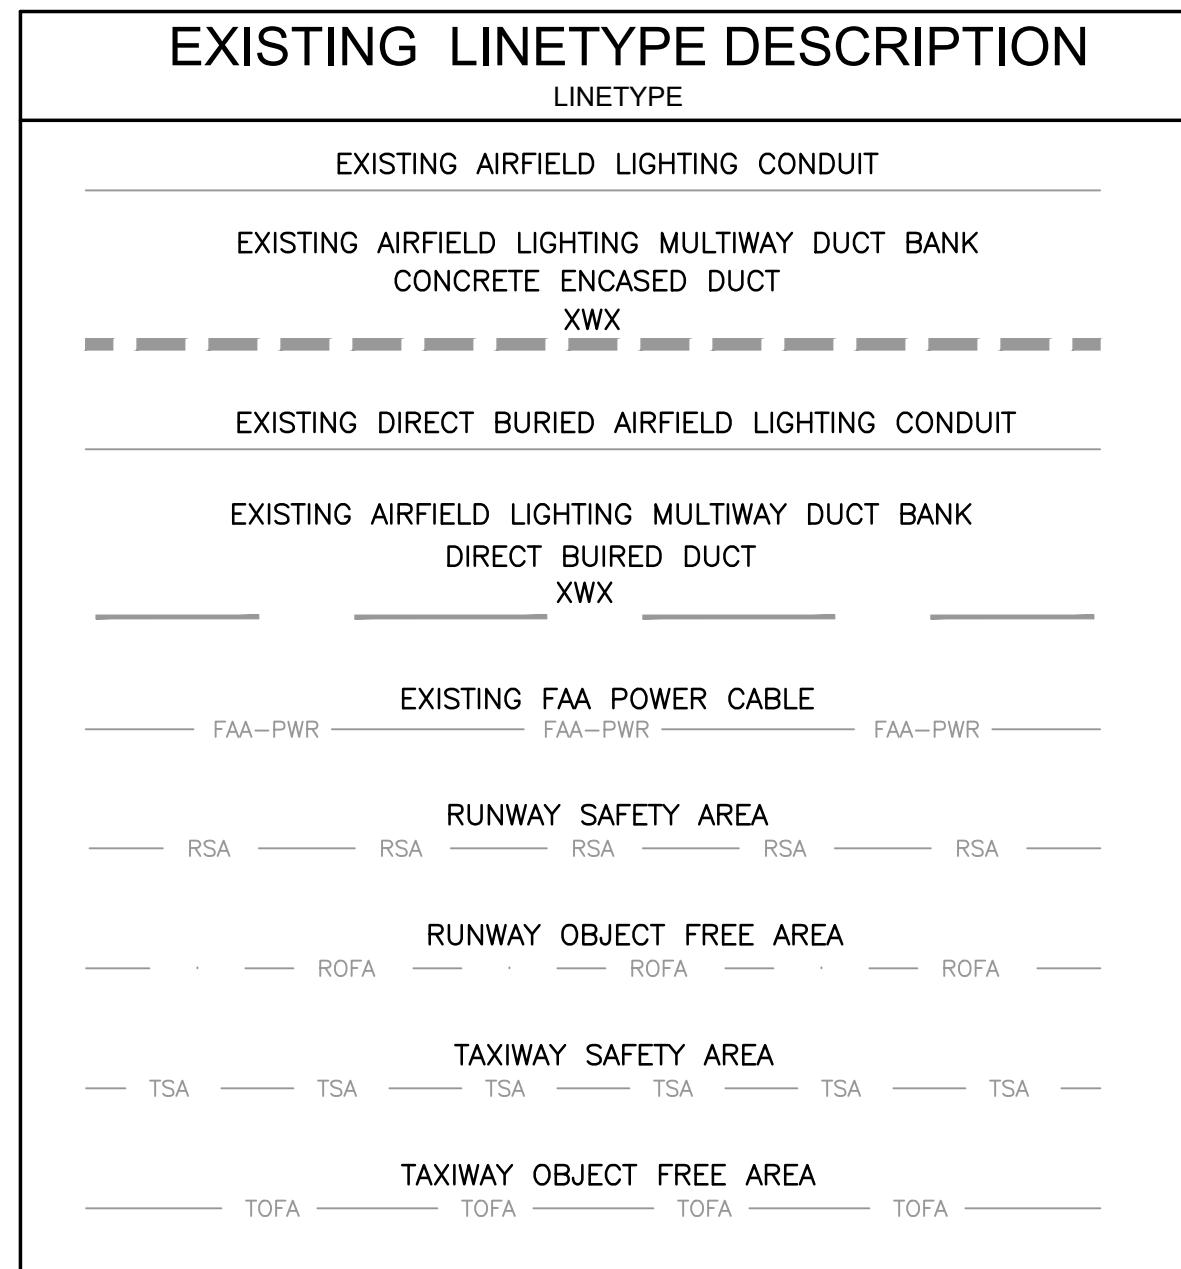


PRIOR TO INITIATION OF ANY CONSTRUCTION IN THE FIELD, THE CONTRACTOR SHALL PROVIDE A WRITTEN NOTICE (RETURN RECEIPT REQUESTED) TO EACH OF THE AREA UTILITY COMPANIES ALONG WITH THE VARIOUS DEPARTMENTS OF THE AIRPORT AUTHORITY AS PRESCRIBED BY STATE LAW. THE CONTRACTOR SHALL PROVIDE THE OWNER AND ENGINEER WITH A COPY OF THE RECEIPT OF SAID WRITTEN NOTIFICATION TO EACH OF THE UTILITY COMPANIES OR AIRPORT AUTHORITY. THIS REQUIREMENT IS IN ADDITION TO ANY OTHER STATE LAWS REGARDING PUBLIC NOTIFICATION PRIOR TO EXCAVATION.

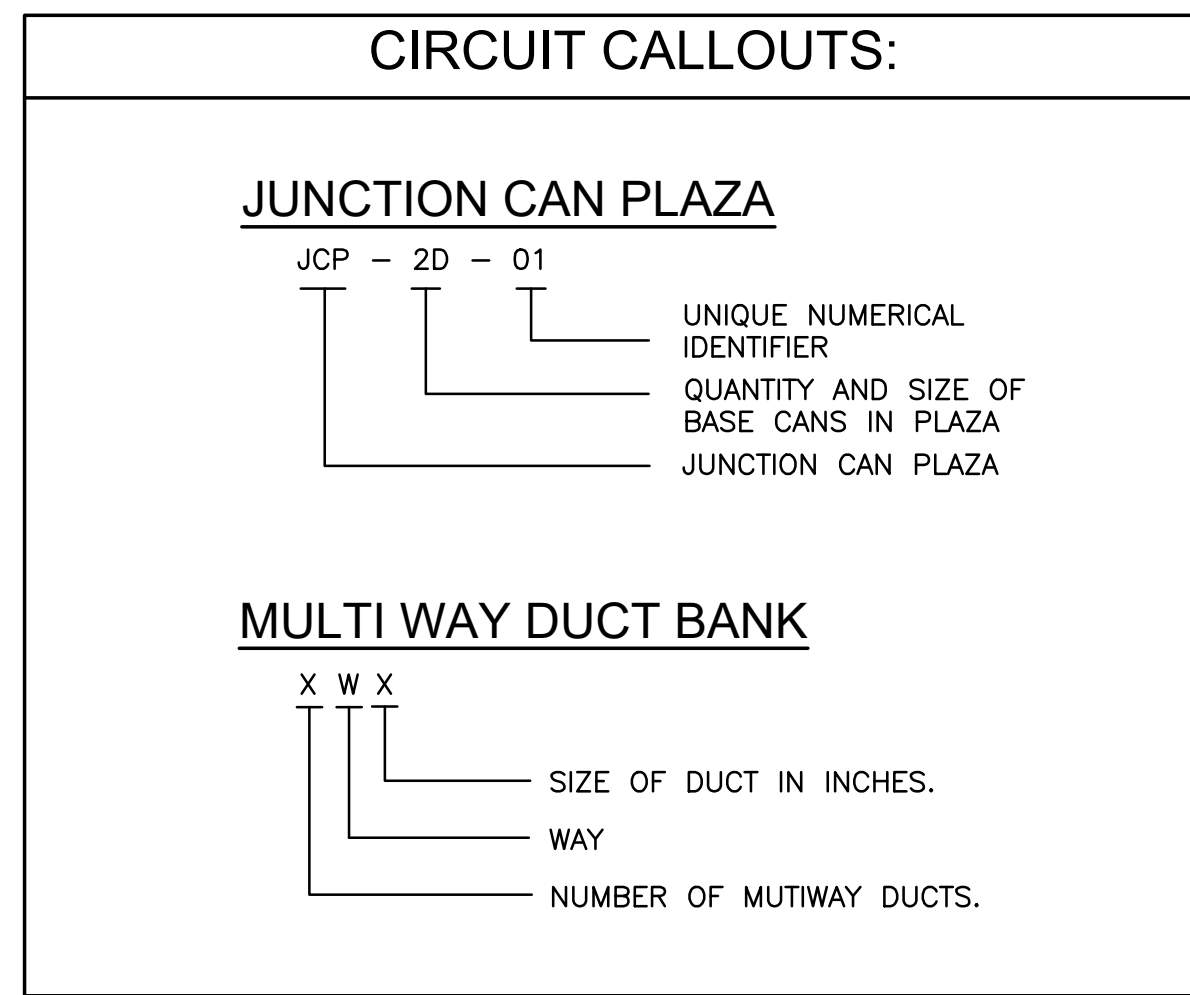

ABBREVIATIONS	
ABBREVIATIONS	DESCRIPTIONS
A	AMPERE
AC	AIR CONDITIONING
AC	ADVISORY CIRCULAR
ACC	ASPHALT CEMENT CONCRETE
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AOR	AIRPORT OWNER'S REPRESENTATIVE
ATS/BIS	AUTOMATIC TRANSFER SWITCH/BYPASS ISOLATION SWITCH
AWG	AMERICAN WIRE GAUGE
BC	BARE COPPER
BHD	BARE HARD DRAWN
BSD	BARE SOFT DRAWN
CB	CIRCUIT BREAKER
CE	CONCRETE ENCASE
CL	CENTERLINE
CND	CONDUIT
CCR	CONSTANT CURRENT REGULATOR
DEB	DIRECT EARTH BURIAL
DIA	DIAMETER
DPU	DATA PROCESSING UNIT
DWG	DRAWING
(E)	EASTING
EA	EACH
E/G	ENGINE GENERATOR
EES	EARTH ELECTRODE SYSTEM
EIT	ELECTRONIC INSTALLATION TEAM
ELEC	ELECTRICAL
ELEV	ELEVATION
EMT	ELECTRICAL METALLIC TUBING
EQUIP	EQUIPMENT
ERCP	ELLIPTICAL REINFORCED CONCRETE PIPE
EXH	EXHAUST
FAA	FEDERAL AVIATION ADMINISTRATION
GAL	GALLON
GALV	GALVANIZED
GEC	GROUNDING ELECTRODE CONDUCTOR
GEN	GENERATOR
GFE	GOVERNMENT—FURNISHED EQUIPMENT
GFI	GROUND FAULT INTERRUPTER
GFCI	GOVERNMENT FURNISHED CONTRACTOR INSTALLED
GFM	GOVERNMENT—FURNISHED MATERIAL
GND	GROUND
GRS	GALVANIZED RIGID STEEL
GRSC	GALVANIZED RIGID STEEL CONDUIT
G/S	GLIDE SLOPE
HDPE	HIGH—DENSITY POLYETHYLENE
IAW	IN ACCORDANCE WITH
KVA	KILOVOLT AMPERE
KW	KILOWATT
L	LONG
LF	LINEAR FEET
LT	LEFT
LIR	LOW IMPACT RESISTANT
MAX	MAXIMUM
MCC	MASTER CONTROL CABINET
MCB	MAIN CIRCUIT BREAKER
MCM	1000 CIRCULAR MILS
MDT	MAINTENANCE DATA TERMINAL
MLO	MAIN LUG ONLY
MIN	MINIMUM
MLS	MICROWAVE LANDING SYSTEM

ABBREVIATIONS	
ABBREVIATIONS	DESCRIPTIONS
(N)	NOTHING
N/A	NOT APPLICABLE
NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NIC	NOT IN CONTRACT
NFPA	NATIONAL FIRE PROTECTION ASSOCIATION
OC	ON CENTER
OD	OUTSIDE DIAMETER
OL	OVERLOAD
OZ	OUNCE
OSHA	OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION
PH	PHASE
PI	POINT OF INTERSECTION
PT	POINT
PT	POINT OF TANGENCY
PCC	PORTLAND CEMENT CONCRETE
POC	POINT OF CONTACT
PSI	POUNDS PER SQUARE INCH
PVC	POLYVINYL CHLORIDE
R	RADIUS
RT	RIGHT
RW	RUNWAY
RCP	REINFORCED CONCRETE PIPE
REF	REFERENCE
RGS	RIGID GALVANIZED STEEL
RVR	RUNWAY VISUAL RANGE
REIL	RUNWAY END IDENTIFIER LIGHT
SF	SQUARE FEET
SY	SQUARE YARDS
SS	STAINLESS STEEL
SHT	SHEET
SIE	SENSOR INTERFACE ELECTRONICS
SPD	SURGE—PROTECTIVE DEVICES 1000V OR LESS
STA	STATION
STD	STANDARD
SPECS	SPECIFICATIONS
TW	TAXIWAY
THK	THICK
TYP	TYPICAL
UL	UNDERWRITERS LABORATORIES
UNO	UNLESS NOTED OTHERWISE
V	VOLT
VS	VISIBILITY SENSOR
W	WIDE
W/	WITH
WW	WIREWAY
WPI	WHEATHER—PROOF WHILE IN USE
Φ	DIAMETER
Φ	PHASE
§	SPECIFICATION SECTION
±	PLUS OR MINUS



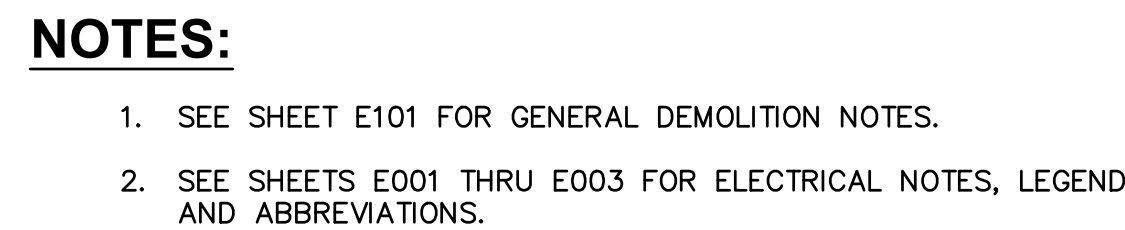


MATCH LINE - SEE SHEET E110

MATCH LINE - SEE SHEET E104

MATCH LINE - SEE SHEET E103

KEYMAP
SCALE: 1" = 5000'

KEYMAP
SCALE: 1" = 5000'

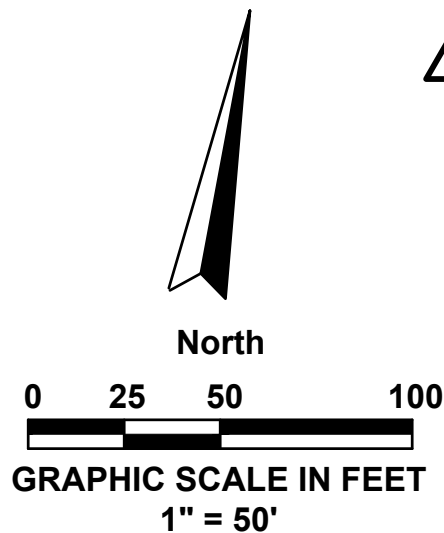[illegible]


AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL. 32503
OFFICE: (850) 698-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
www.avconinc.com

**TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY**

THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION, ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC. FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC. ANY DISTRIBUTION, REPRODUCTION, OR OTHER USE OF THIS DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.

N:\359 CITY OF PENSACOLA-AIRPORT\2024.0359.01-PNS RUNWAY 8-26\000 CAD\24035901_E101-111.DWG 4/11/2025 11:16 AM

MATCH LINE - SEE SHEET E102

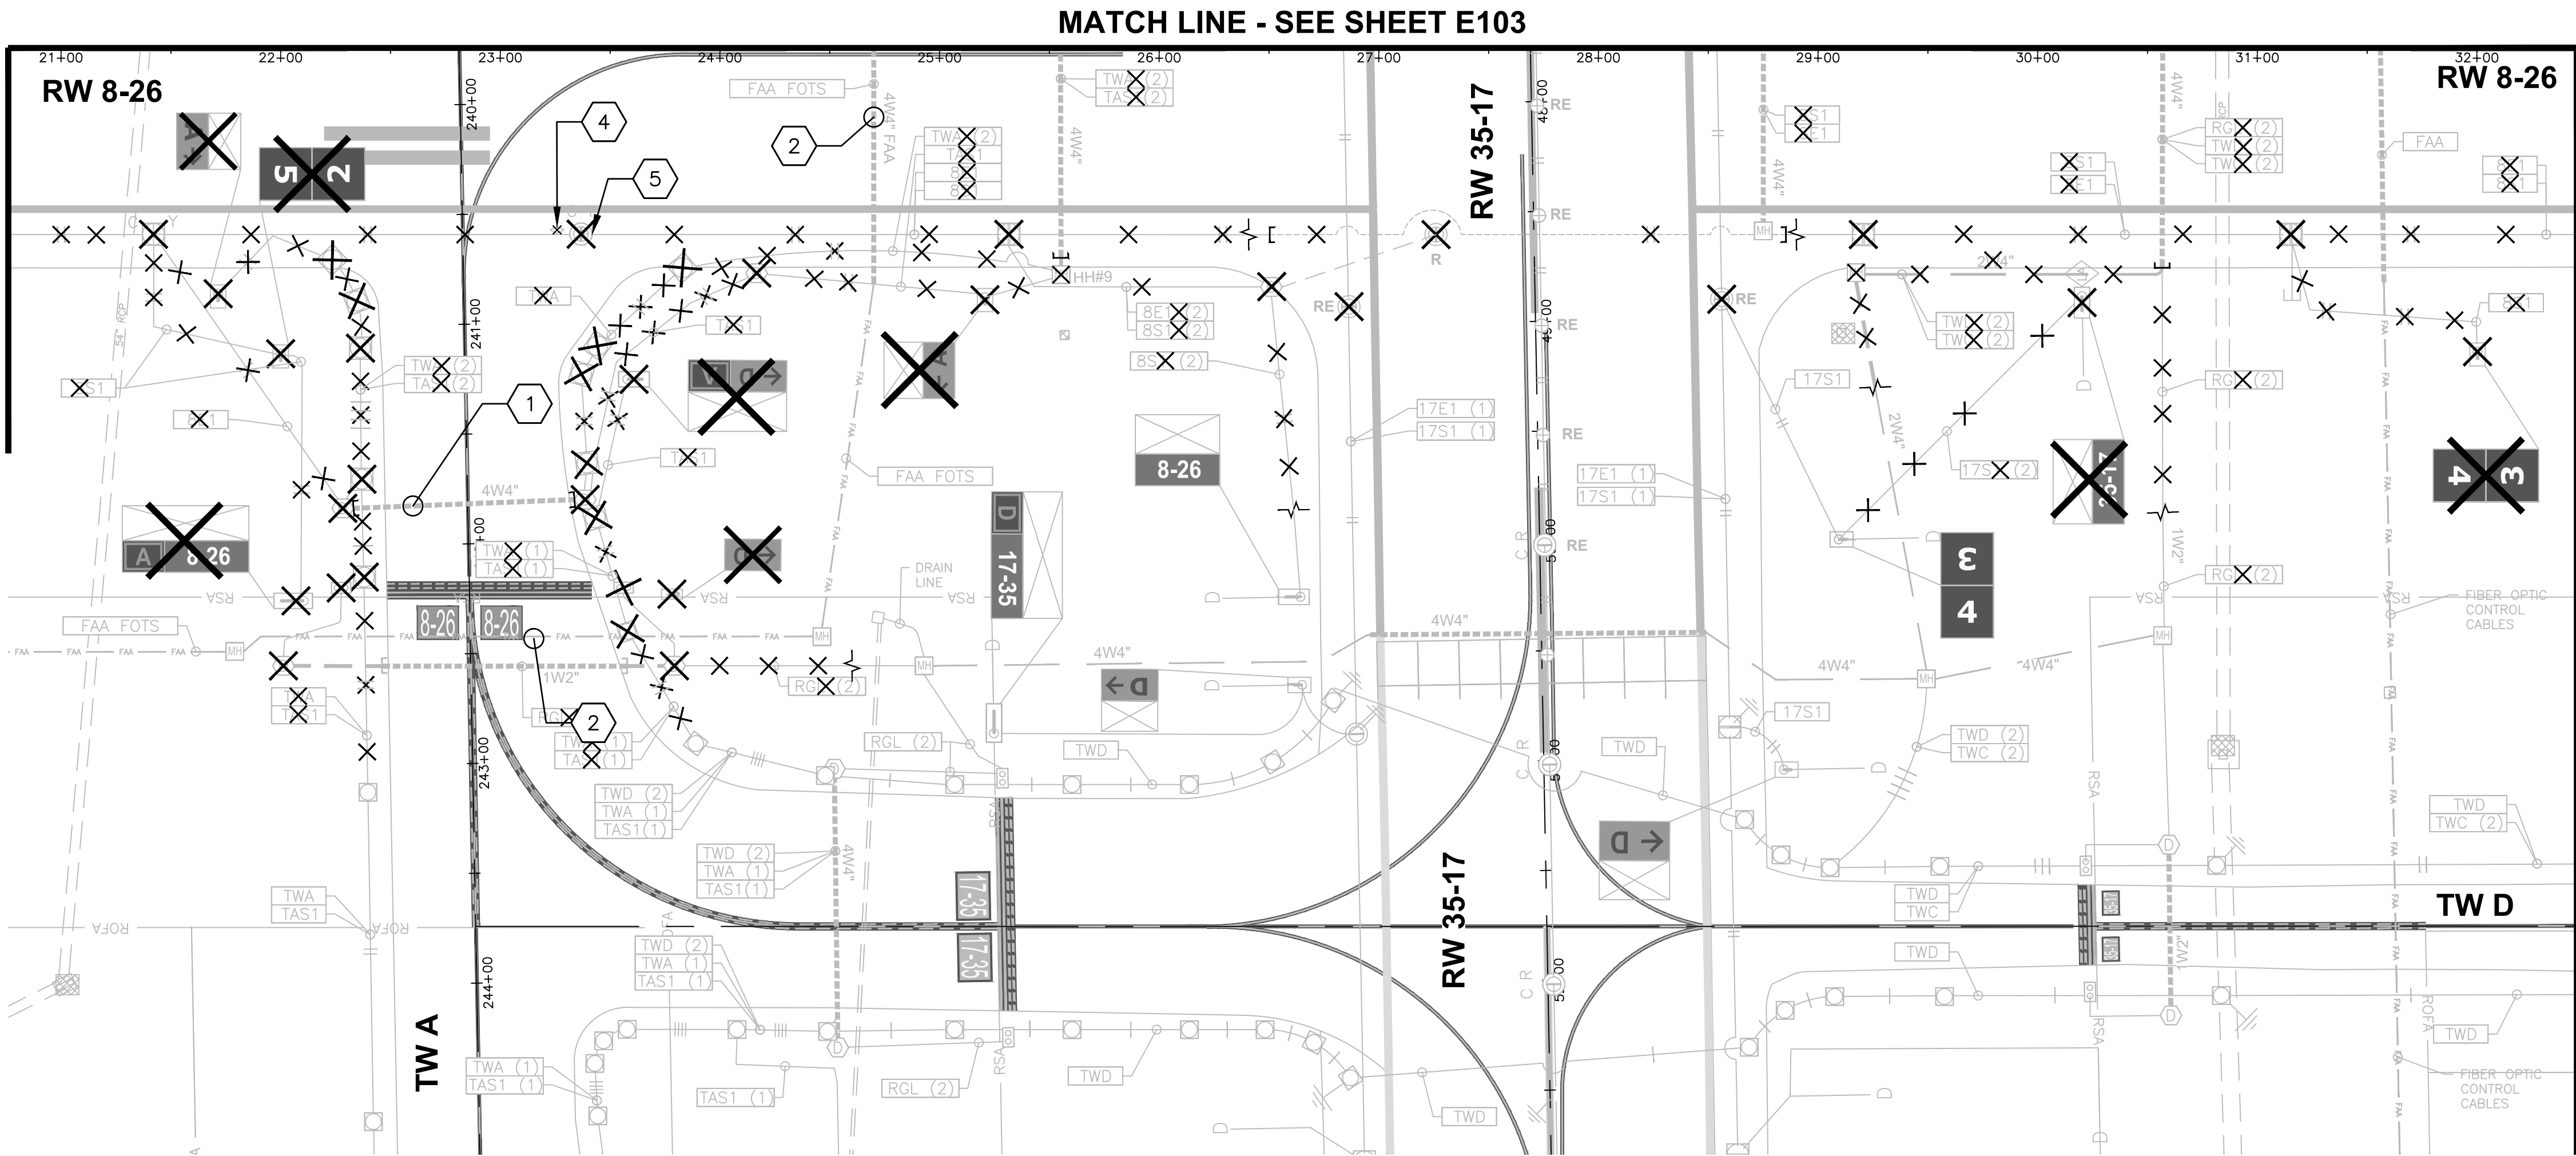



MATCH LINE - SEE SHEET E106

NOTES:

- SEE SHEET E101 FOR GENERAL DEMOLITION NOTES.
- SEE SHEETS E001 THRU E003 FOR ELECTRICAL NOTES, LEGEND AND ABBREVIATIONS.

KEYNOTES:

- ABANDON IN PLACE, EXISTING CONDUIT(S) UNDER PAVEMENT. CAP AND SEAL, NOT TO BE REUSED IN PROJECT.
- PRESERVE AND PROTECT ALL FAA CABLES AND CONDUITS IN AREA. (TYP.)
- FIXTURES WITH 'RE' MODIFIER SHALL BE PRESERVED AND PROTECTED FOR RE-INSTALLATION AFTER MILL & OVERLAY AND LIGHT BASE ELEVATIONS ARE COMPLETED.
- RUNWAY EDGE LIGHT L-868B BASE CAN W/ TOP CAN SECTION; TO BE REMOVED
- SINGLE PIECE L-868C BASE CAN W/ ADAPTER; TO BE REMOVED

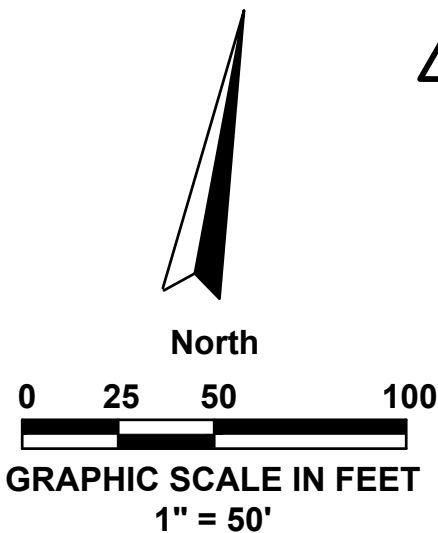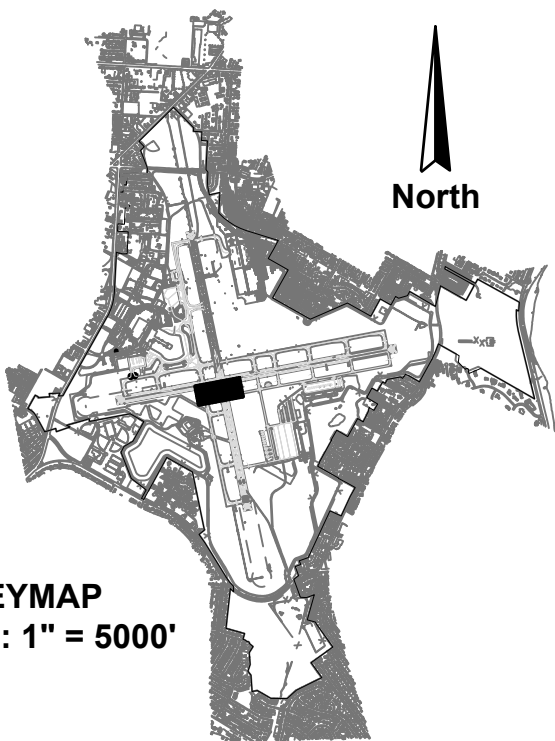

**EXISTING
CONDITIONS AND
DEMOLITION PLAN
(SHEET 4 OF 11)**

**RUNWAY 8-26
REHABILITATION**

PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
E104

NO.	DATE	REVISION	BY
1	4/25	ADDENDUM 3	SAH
2			
3			
4			
5			
6			
7			
8			
9			
10			

AVCON, INC.
ENGINEERS & PLANNERS


3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION. ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC., FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC., ANY DISTRIBUTION, REPRODUCTION, OR OTHER USE OF THIS DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.


N:\359 CITY OF PENSACOLA-AIRPORT\2024.0359.01-PNS RUNWAY 8-26\000 CAD\24035901_E101-111.DWG 4/11/2025 11:16 AM

MATCH LINE - SEE SHEET E103

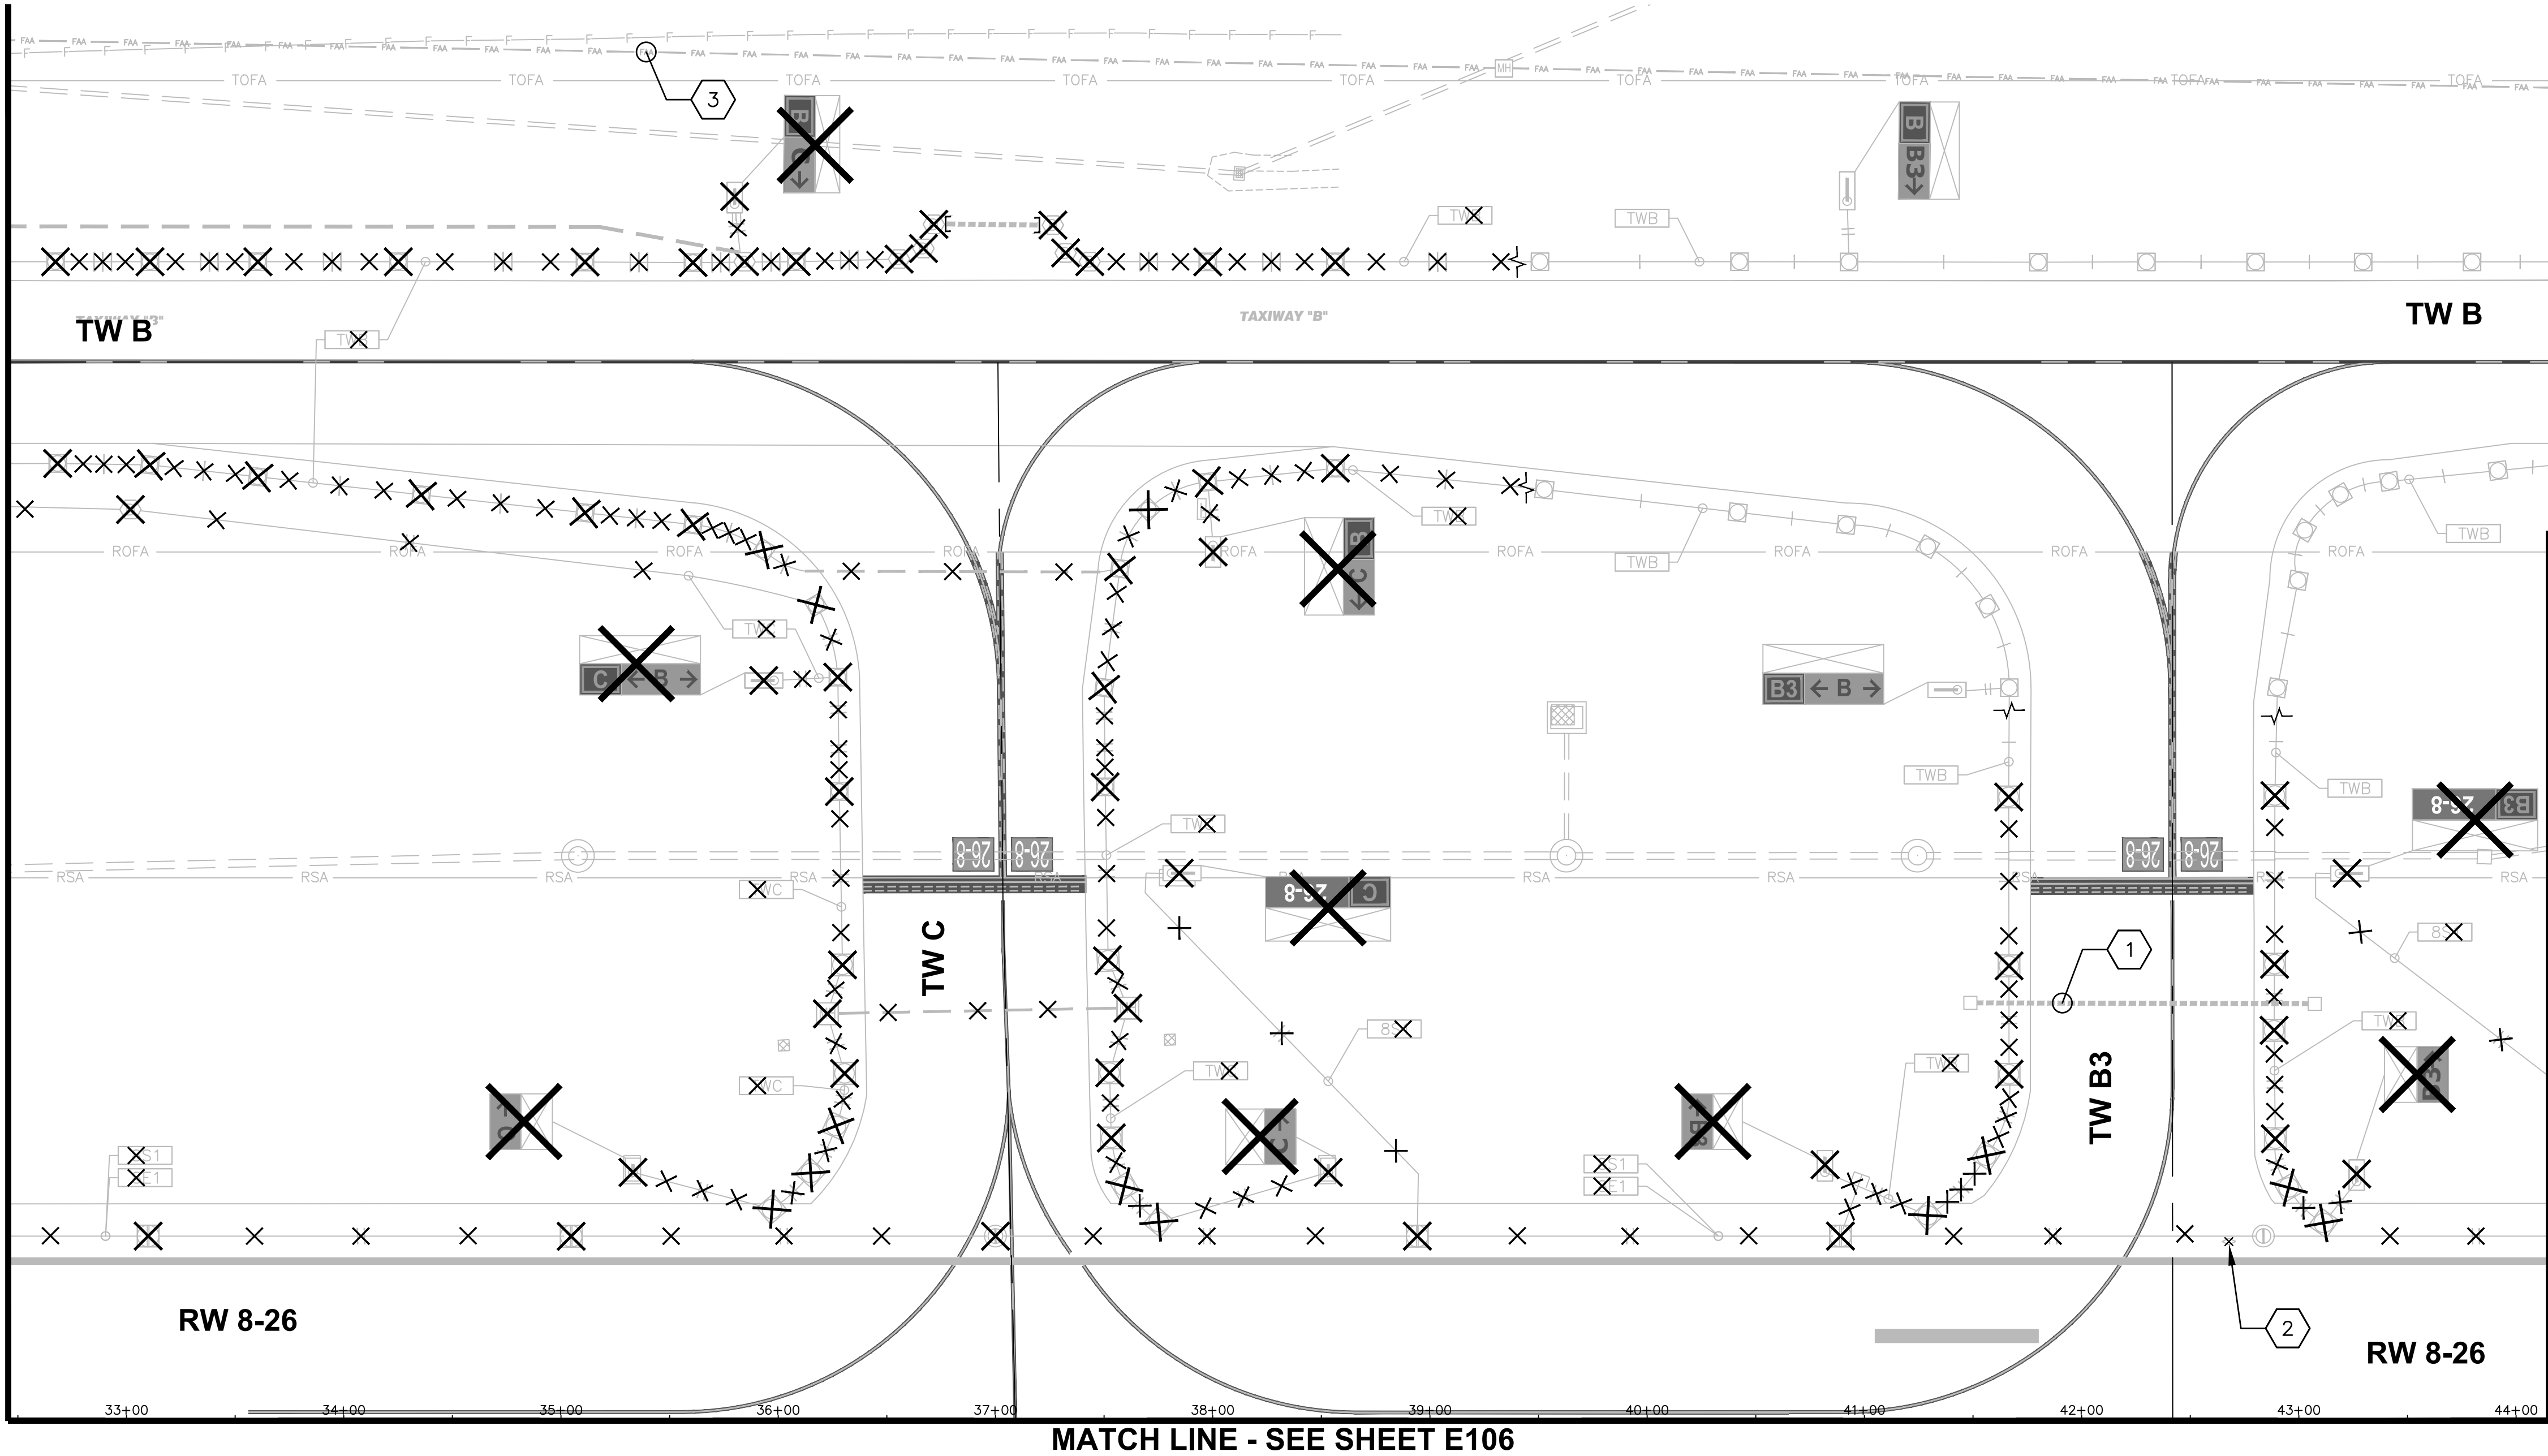

NOTES:


1. SEE SHEET E101 FOR GENERAL DEMOLITION NOTES.
2. SEE SHEETS E001 THRU E003 FOR ELECTRICAL NOTES, LEGEND AND ABBREVIATIONS.

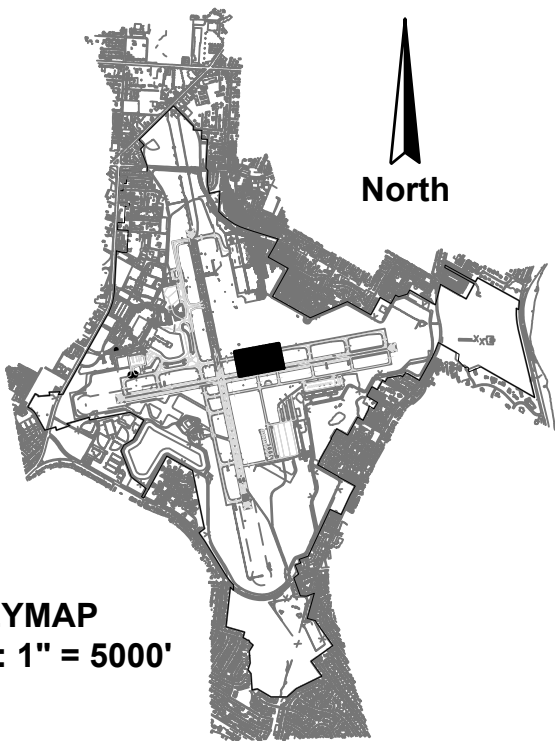

KEYMAP
SCALE: 1" = 5000'

KEYNOTES:

- 1 ABANDON IN PLACE, EXISTING CONDUIT(S) UNDER PAVEMENT. CAP AND SEAL, NOT TO BE REUSED IN PROJECT.
- 2 SINGLE PIECE L-868C BASE CAN W/ ADAPTER; TO BE REMOVED
- 3 PRESERVE AND PROTECT ALL FAA CABLES AND CONDUITS IN AREA. (TYP.)

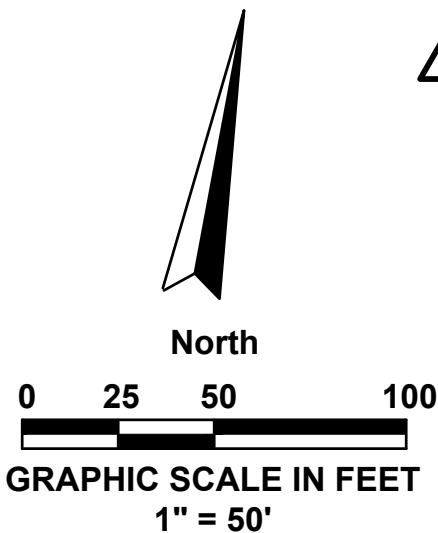

EXISTING
CONDITIONS AND
DEMOLITION PLAN
(SHEET 5 OF 11)
ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
E105

NO.	DATE	REVISION	BY
1	4/25	ADDENDUM 3	SAH
2			
3			
4			
5			
6			
7			
8			
9			
10			




AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3326
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY


N:\359 CITY OF PENSACOLA-AIRPORT\2024.0359.01-PNS RUNWAY 8-26\000 CAD\24035901_E101-111.DWG 4/11/2025 11:16 AM

MATCH LINE - SEE SHEET E104

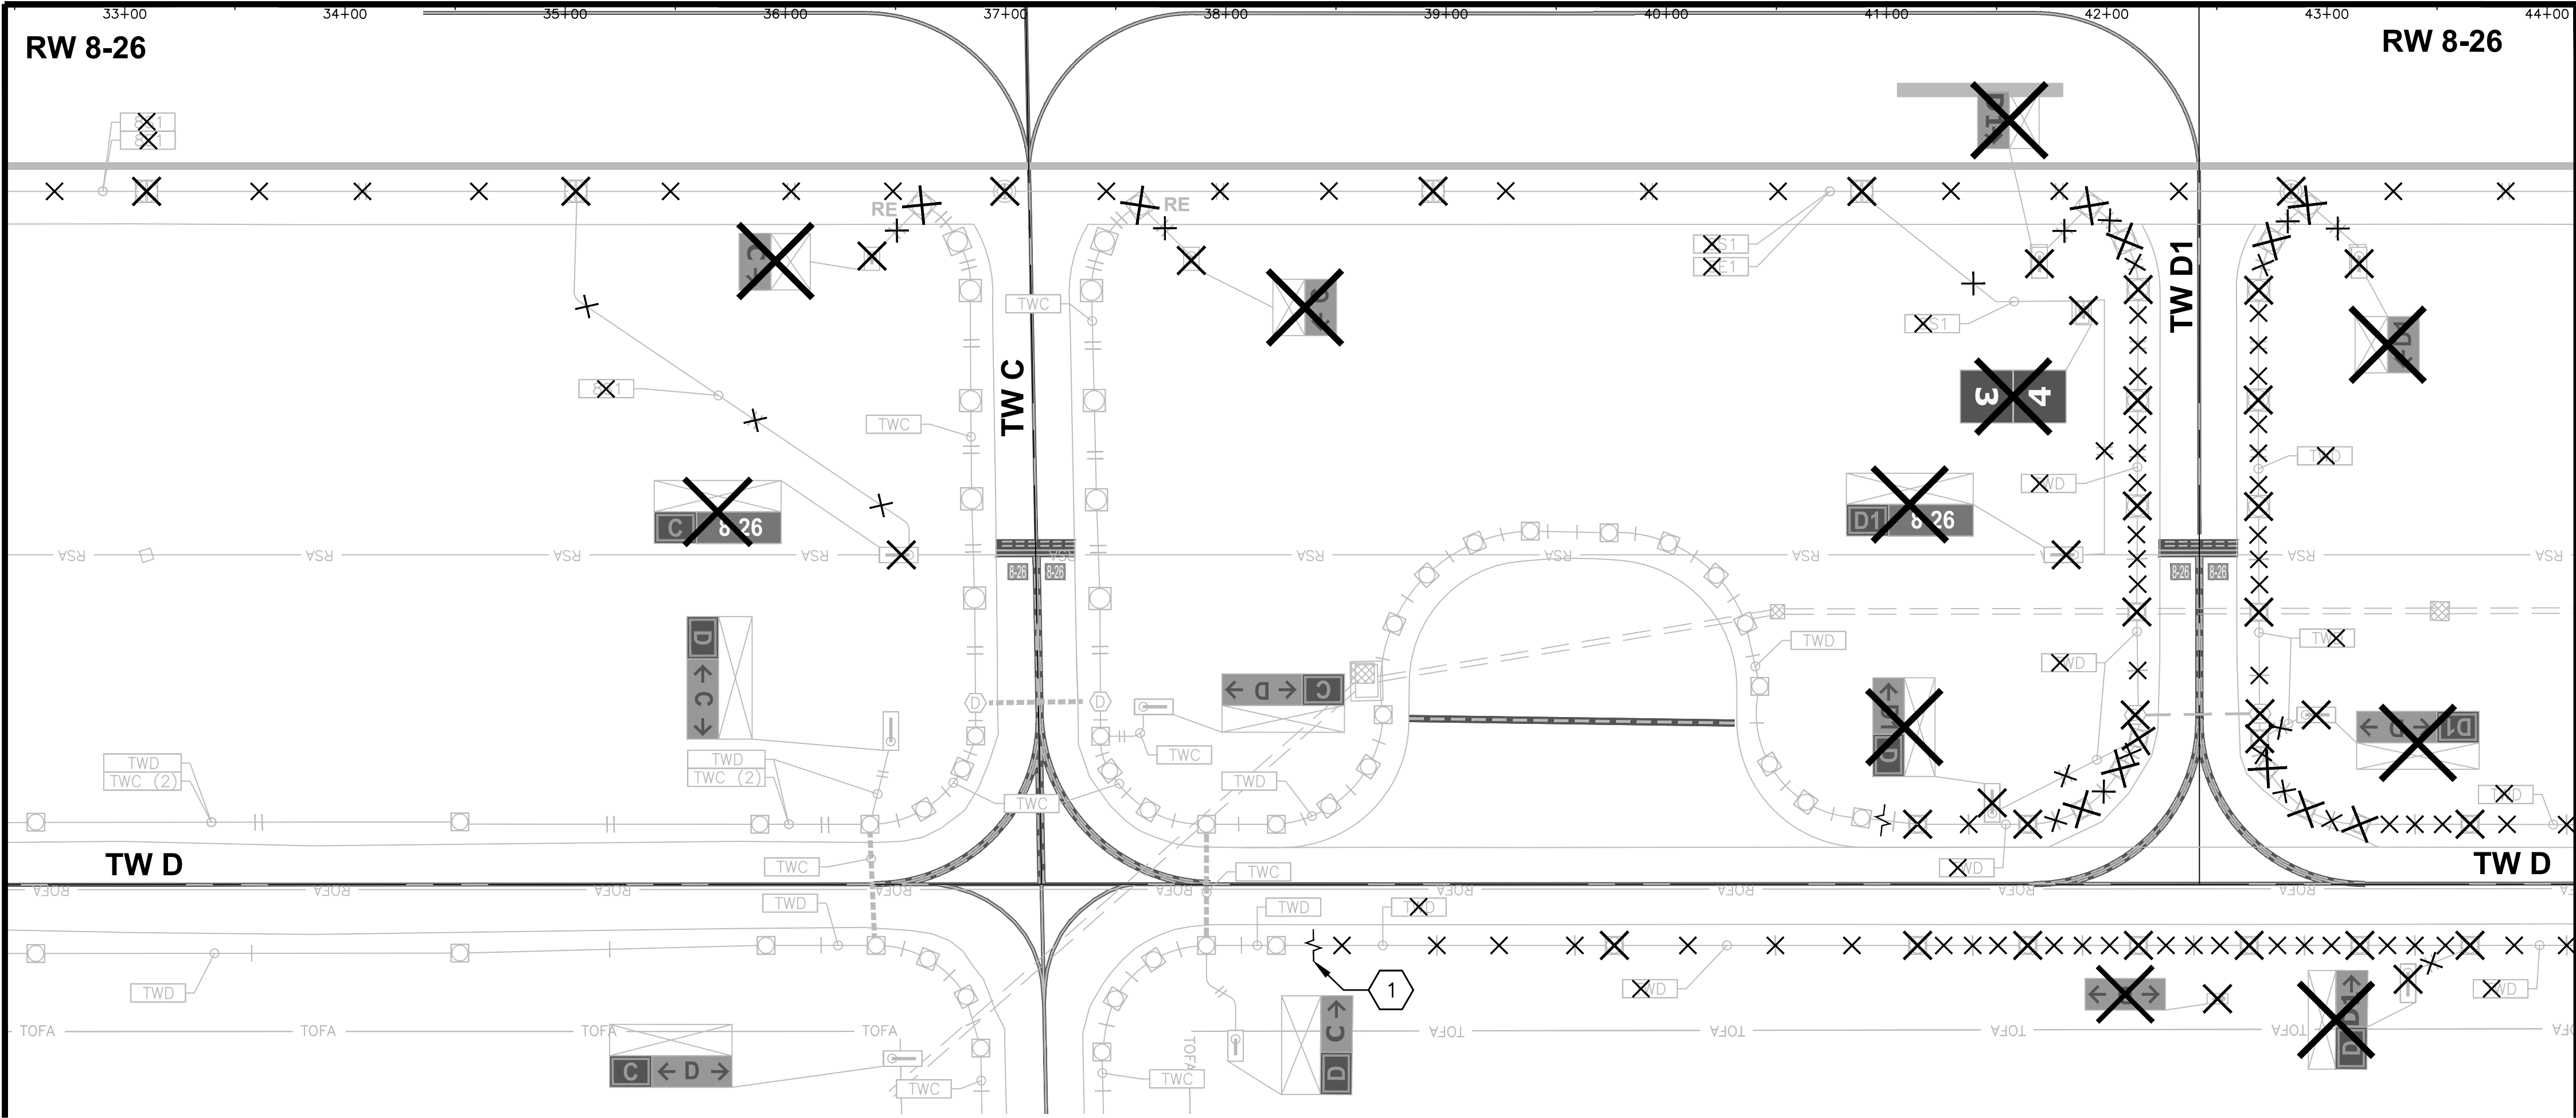


NOTES:

1. SEE SHEET E101 FOR GENERAL DEMOLITION NOTES.
2. SEE SHEETS E001 THRU E003 FOR ELECTRICAL NOTES, LEGEND AND ABBREVIATIONS.

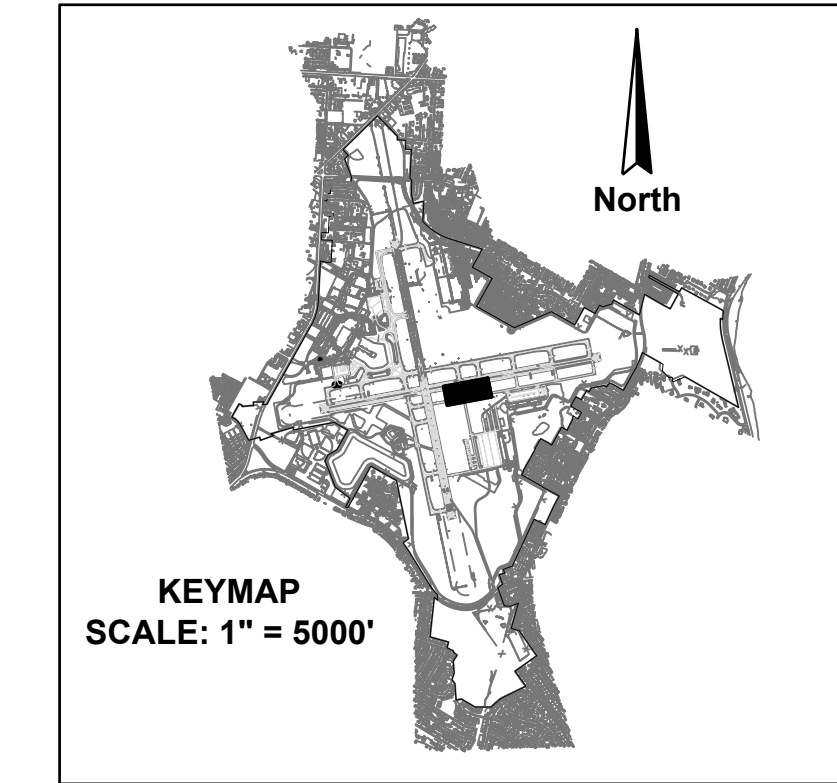

KEYNOTES:

1. SYMBOL INDICATES A CUT-SECTION IN CONDUIT. DEMOLISH ALL CONDUCTORS WITHIN CONDUIT AS SHOWN. CUT CONDUIT AND PRESERVE AND PROTECT EXISTING CONDUIT TO REMAIN AND BE REUSED IN THIS PROJECT.

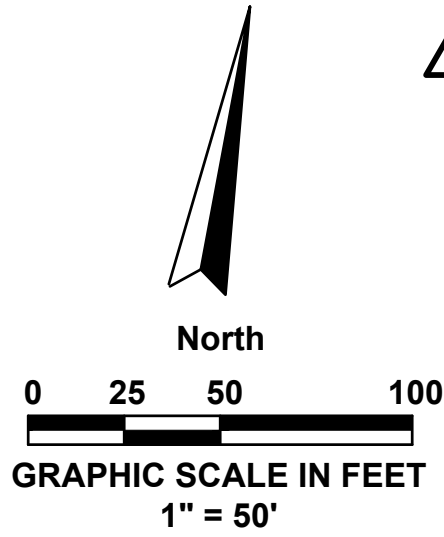

EXISTING
CONDITIONS AND
DEMOLITION PLAN
(SHEET 6 OF 11)
ISSUED FOR BID DRAWINGS

RUNWAY 8-26
REHABILITATION
PREPARED FOR
PENSACOLA INTERNATIONAL AIRPORT

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

SHEET NUMBER
E106


NO.	DATE	REVISION	BY
1	4/25	ADDENDUM 3	SAH
2			
3			
4			
5			
6			
7			
8			
9			
10			

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 8057
WWW.AVCONINC.COM
TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY
THIS DOCUMENT CONTAINS PRIVILEGED AND PROPRIETARY INFORMATION. ALL OF WHICH IS EXPRESSLY PROVIDED BY AVCON, INC., FOR USE BY THE INTENDED RECIPIENT, AND FOR A SPECIFIC PURPOSE. WITHOUT THE EXPRESS WRITTEN CONSENT OF AVCON, INC., ANY DISTRIBUTION, REPRODUCTION OR OTHER USE OF THIS DOCUMENT, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED.

N:\359 CITY OF PENSACOLA-AIRPORT\2024.0359.01-PNS RUNWAY 8-26\000 CAD\24035901_E101-111.DWG 4/11/2025 11:16 AM

MATCH LINE - SEE SHEET E106

MATCH LINE - SEE SHEET E105

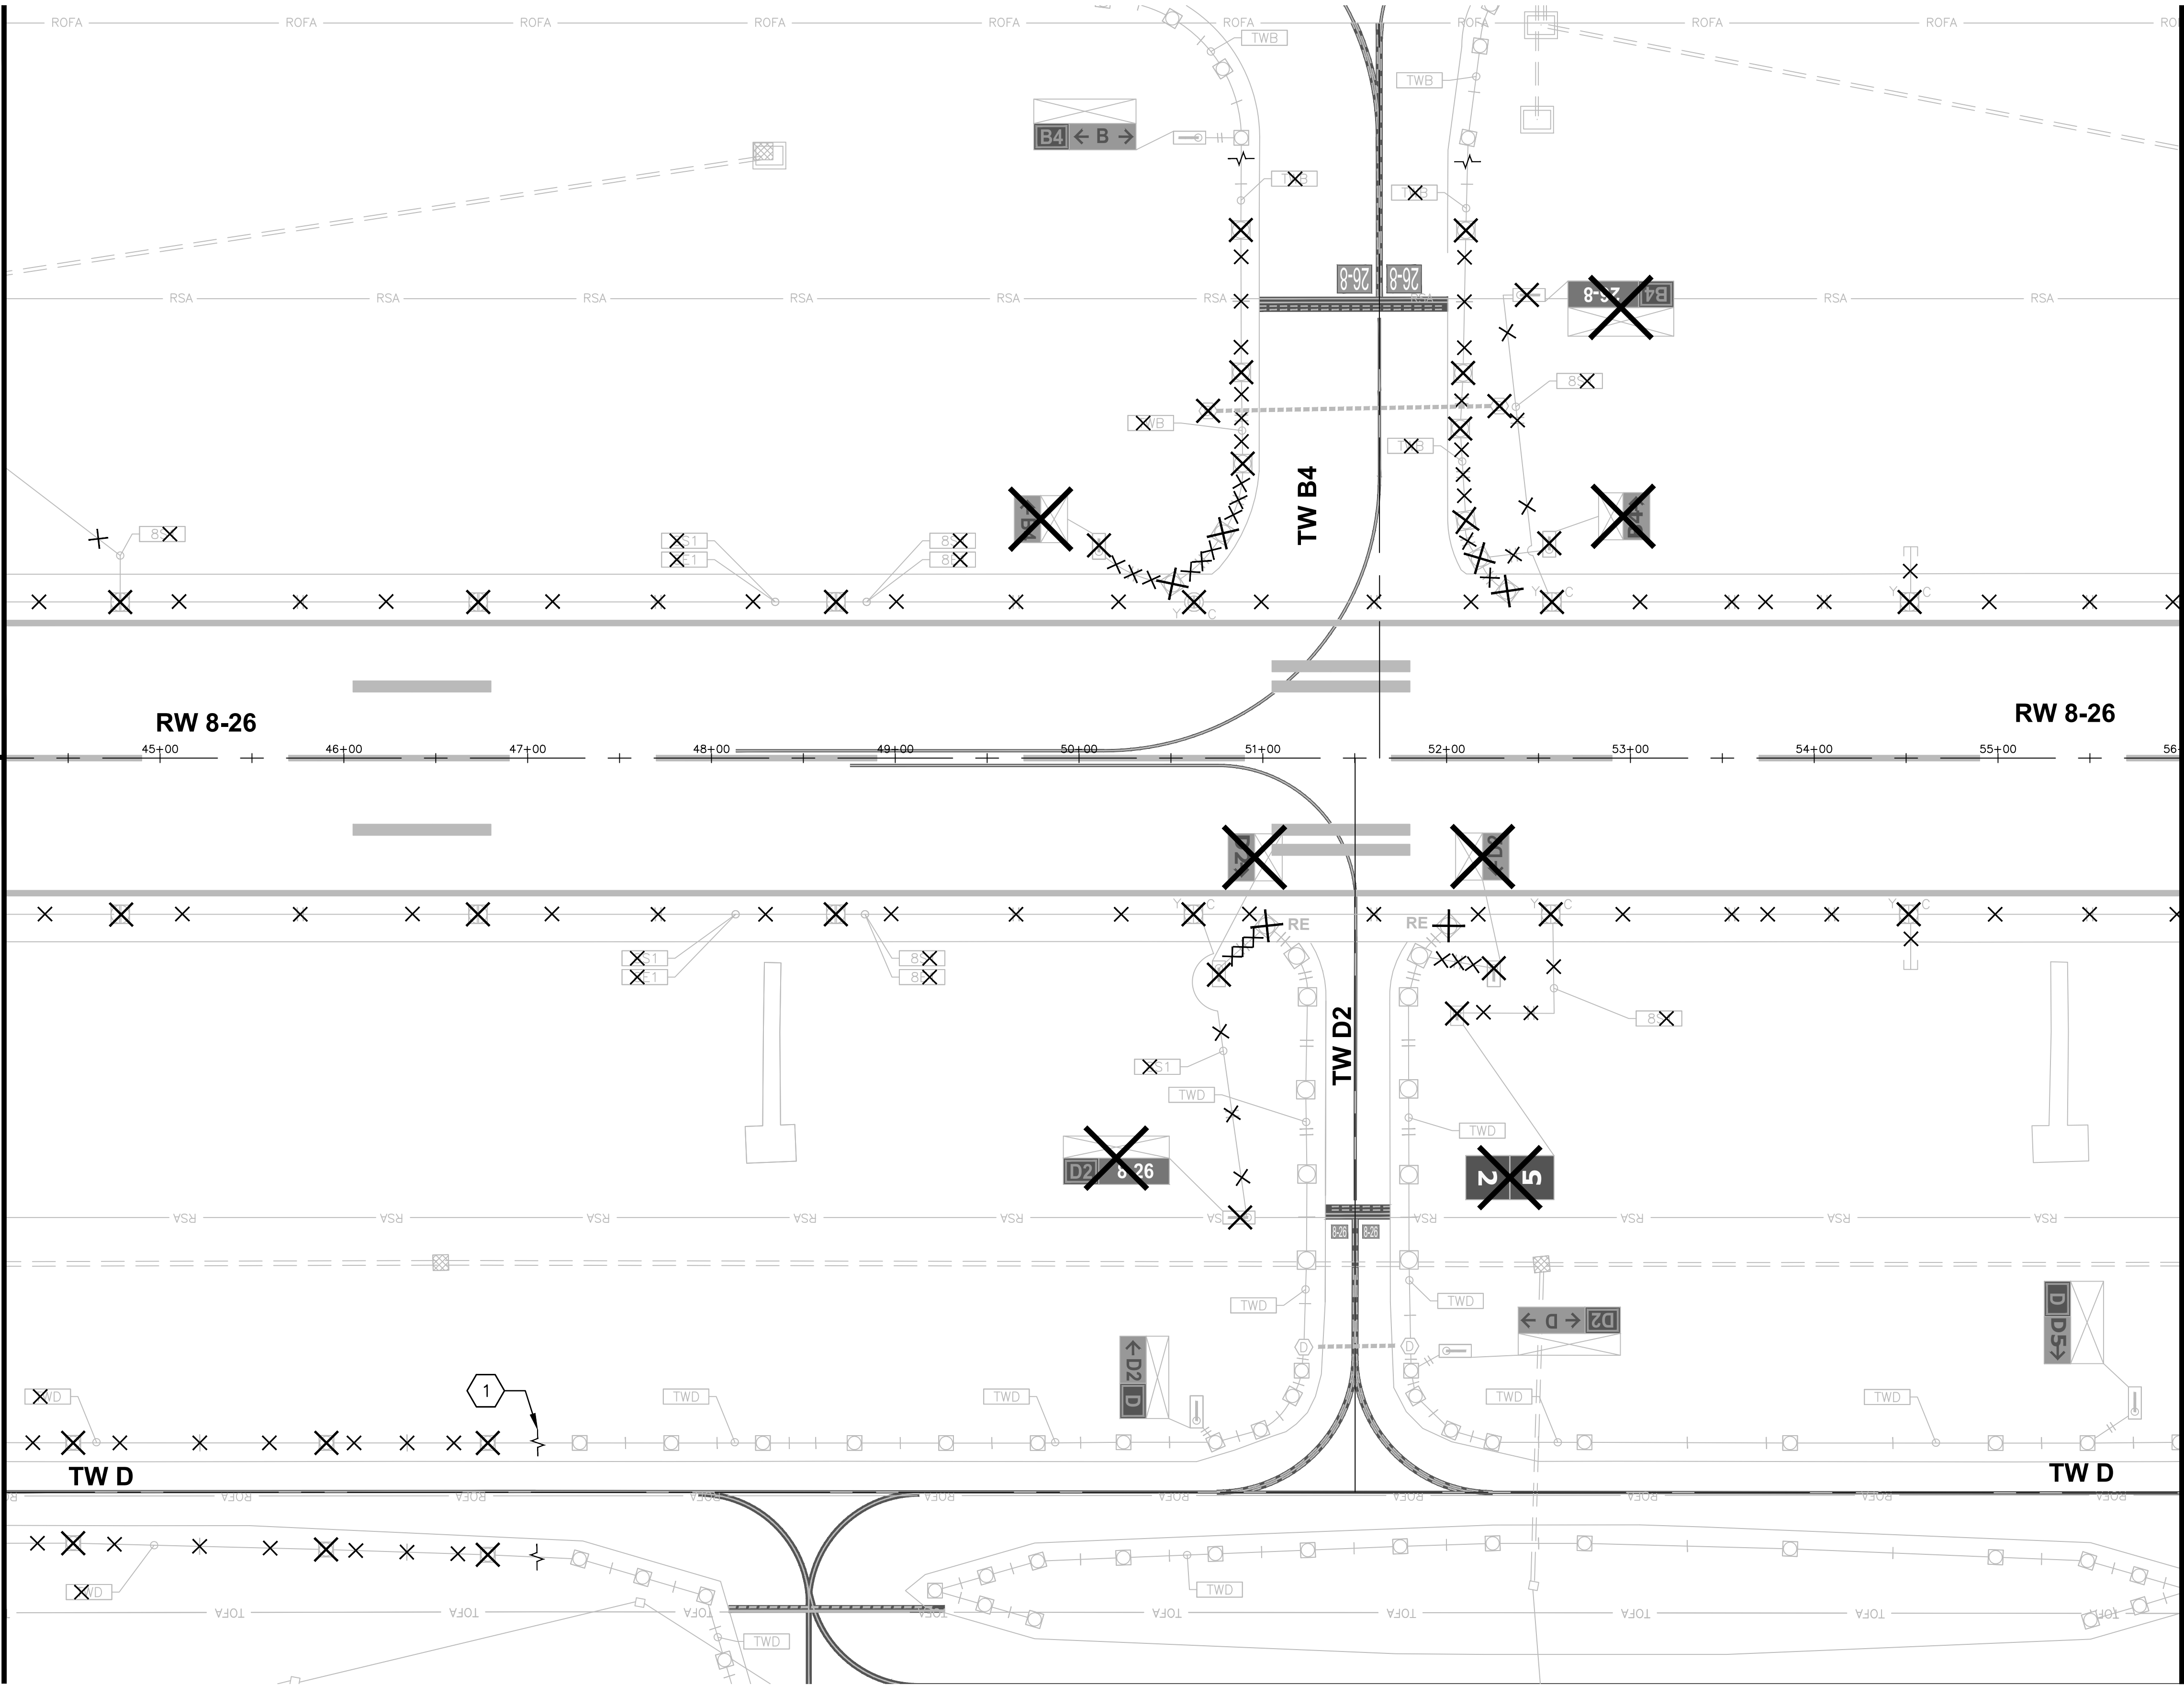



NOTES:

- SEE SHEET E101 FOR GENERAL DEMOLITION NOTES.
- SEE SHEETS E001 THRU E003 FOR ELECTRICAL NOTES, LEGEND AND ABBREVIATIONS.

MATCH LINE - SEE SHEET E108

KEYNOTES:

- 1 SYMBOL INDICATES A CUT-SECTION IN CONDUIT. DEMOLISH ALL CONDUCTORS WITHIN CONDUIT AS SHOWN. CUT CONDUIT AND PRESERVE AND PROTECT EXISTING CONDUIT TO REMAIN AND BE REUSED IN THIS PROJECT.

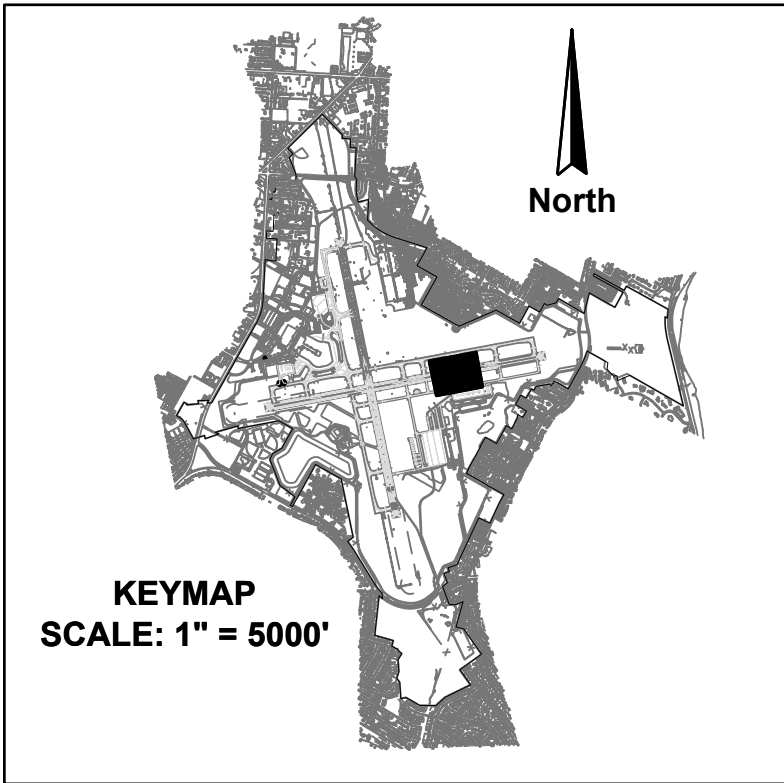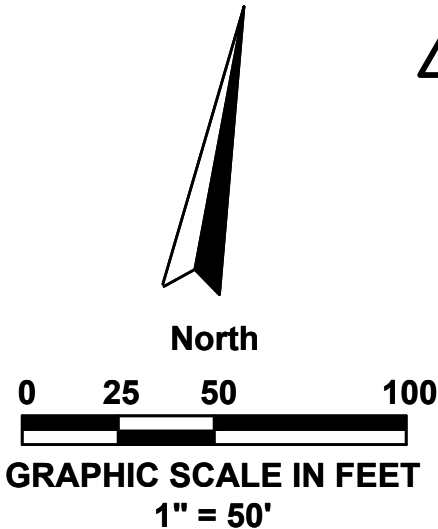

**RUNWAY 8-26
REHABILITATION**

**EXISTING
CONDITIONS AND
DEMOLITION PLAN
(SHEET 7 OF 11)**

NO.	DATE	REVISION	BY
1	4/25	ADDENDUM 3	SAH

AVCON, INC.
ENGINEERS & PLANNERS
3298 SUMMIT BLVD., SUITE 26
PENSACOLA, FL 32503
OFFICE: (850) 688-3526
CORPORATE CERTIFICATE OF
AUTHORIZATION NUMBER: 5057
WWW.AVCONINC.COM

TRANSFORMING TODAY'S IDEAS
INTO TOMORROW'S REALITY

DESIGNED BY: SAH
DRAWN BY: KJF
CHECKED BY: MAG
APPROVED BY: VCL
PROJECT NO: 24.0359.01
DATE: MARCH 28, 2025

**SHEET NUMBER
E107**